Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

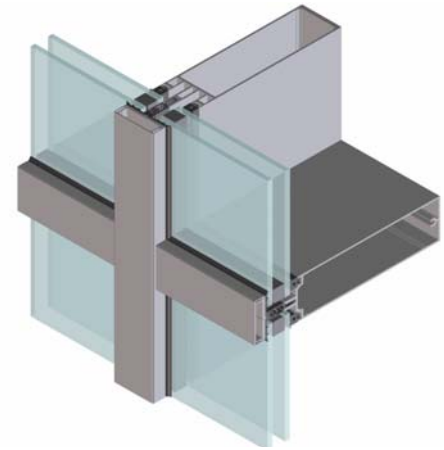

Capped

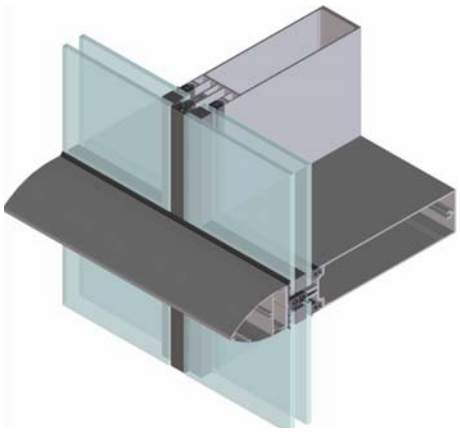

2 sided SGH

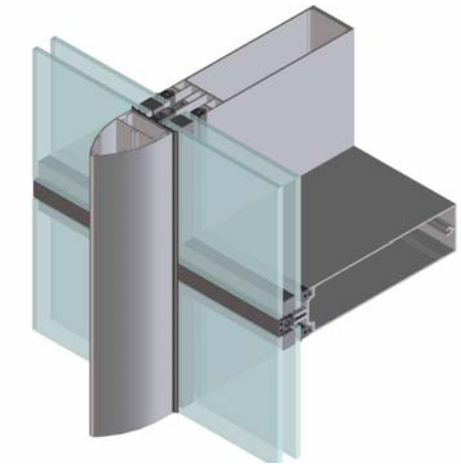

2 sided SGV

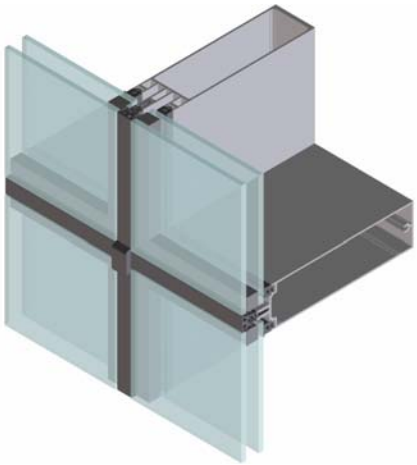

4 sided SG

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Important Information

BONDING AND SEALING - ADHESIVE DETAILS

For Comar 6 EFT Curtain Walling System

1. For the 20mm Glass to Glass sealant joint, you can use Dow Corning 797. This is a one part low modulus silicone sealant, for laminated and surface coated glass contact Dow Corning for suitability. If using other brands please ensure that it is suitable. A bond breaker tape is required to the outside gasket surface to prevent a three way seal. Minimum joint sealant thickness is usually 6mm with a ratio of 2:1.

   It is advisable to use an approved applicator to ensure quality of workmanship. Your Sealant Supplier can advise your nearest agent.

2. For Structural Bonding applications (double glazed units / single glass panes to frames and Concealed Vents) Dow Corning sealant 993 is recommended. When bonding to aluminium it is recommended that the bonding surface is anodised prior to bonding. Alternatively, if bonding to powder coat or other finish the bonding agent and the profile finish MUST be checked for compatibility by the finish applicator / sealant supplier.

3. For general external pointing Dow Corning 791 (or equivalent) with appropriate backer rod is recommended for gaps to walls etc.

4. The gasket sealant is specified by us as this forms an important part of the rebate seal and is specified as Arbomeric MP20 from Adshead Ratcliffe. Therefore gasket joints and any bedding required (including all transom gasket grooves) should have this sealant applied. One should also bed 100mm up or down the vertical (mullion) from a transom corner joint.

5. The above notes are for guidance only and any customer should satisfy themselves that the product being used is fit for purpose.

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Important information

Glass cutting sizes
For standard curtain walling glass cutting sizes are:
C.T.C - 24mm e.g. 7mm ventilation gap.
For 2 and 4 sided structural glazing glass cutting sizes are:
C.T.C - 20mm e.g. 5mm ventilation gap.

Standard Curtain walling

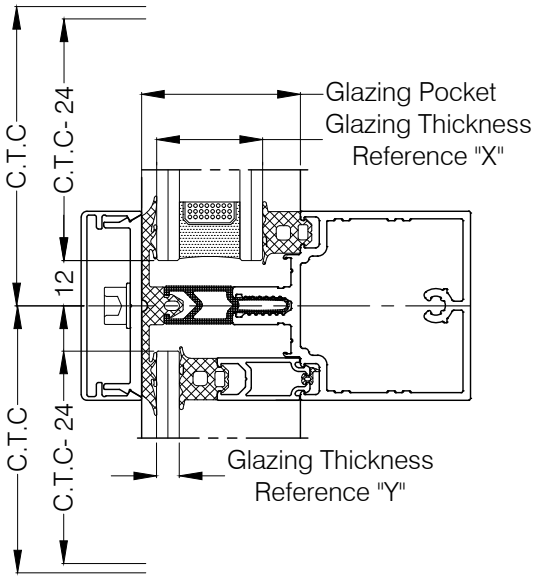

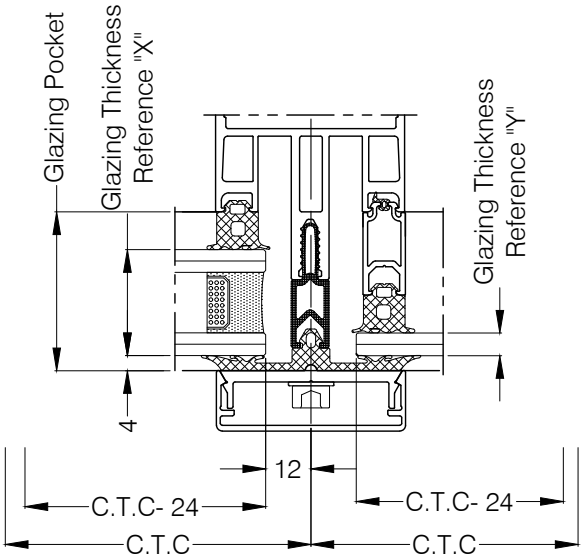

Structural Sealed Glazing

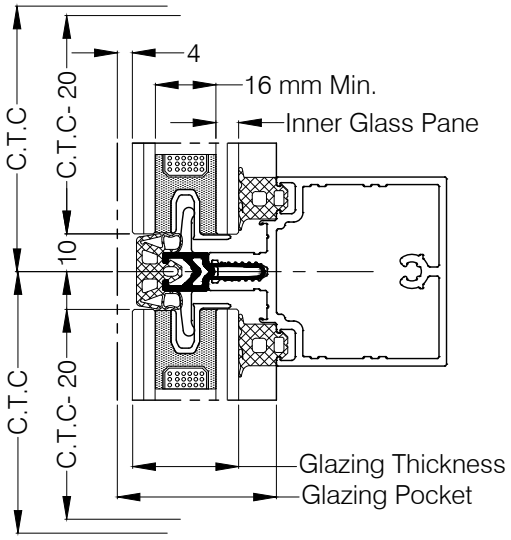

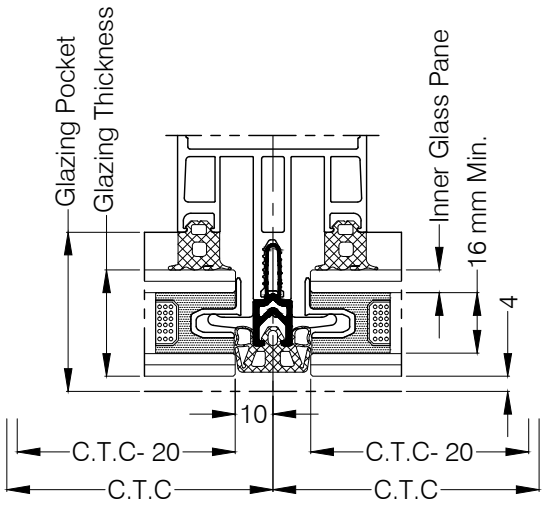

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 04-17

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Detail section

Inner Glass Thickness 6-11 mm



3.00

Capped or 2 Side SGV

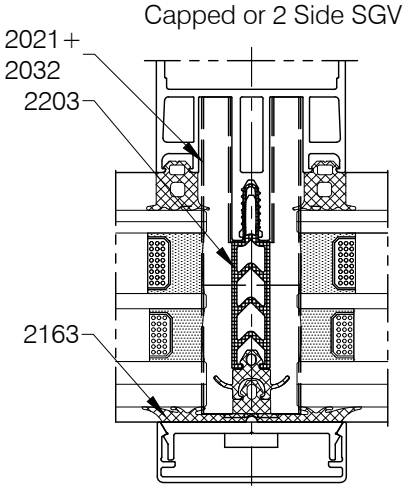

Capped or 2 Side SGH

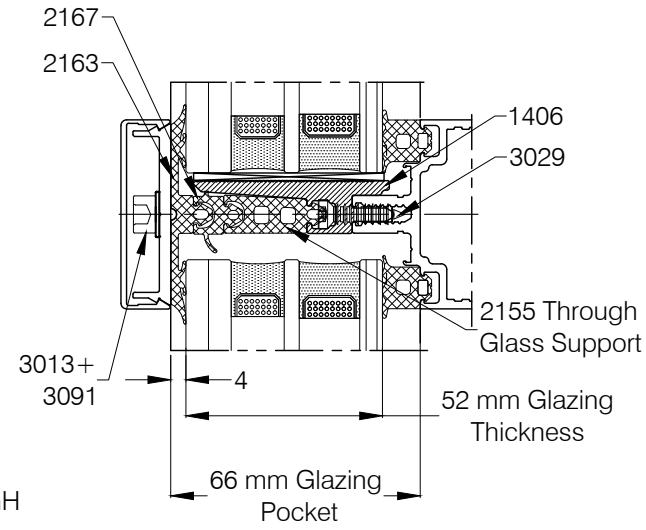

4 Side SG or 2 Side SGH

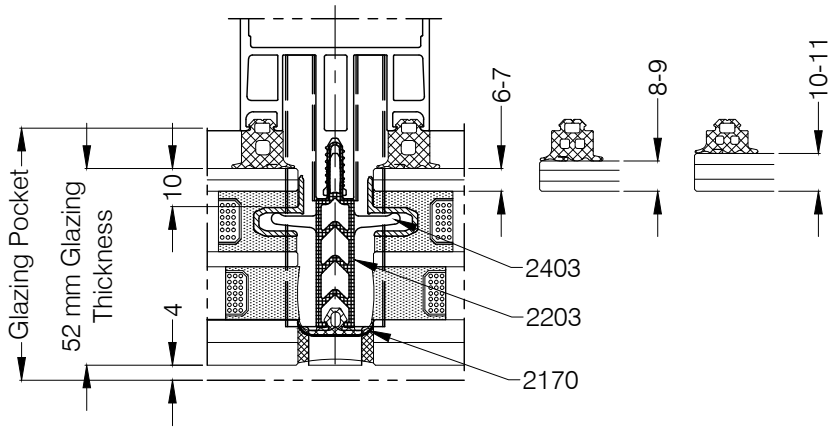

4 Side SG or 2 Side SGV

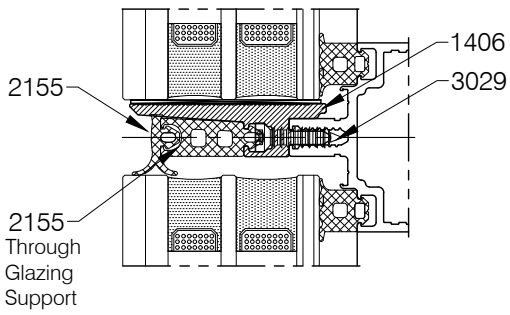

4 Side SG or 2 Side SGV

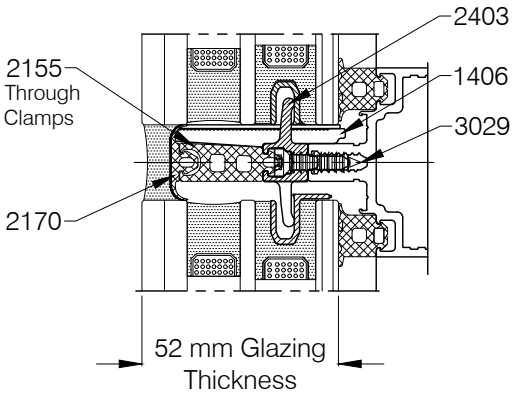

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 04-17

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Comar 6EFT

Detail section



Inner Glass Thickness 12-18 mm

3.01

Capped or 2 Side SGV

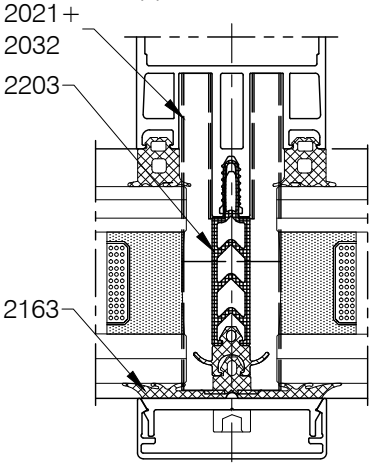

Capped or 2 Side SGH

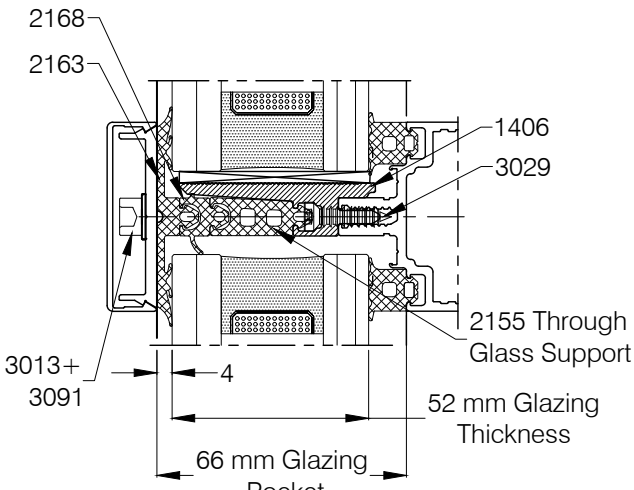

4 Side SG or 2 Side SGH

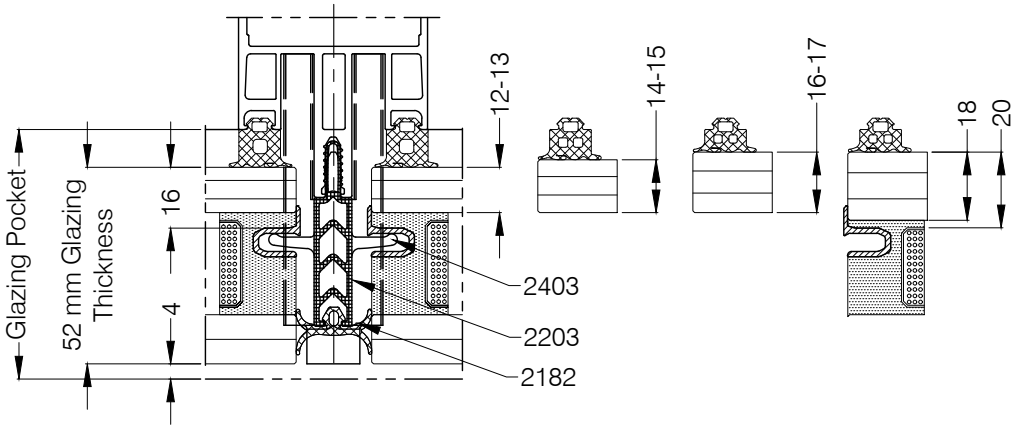

4 Side SG or 2 Side SGV

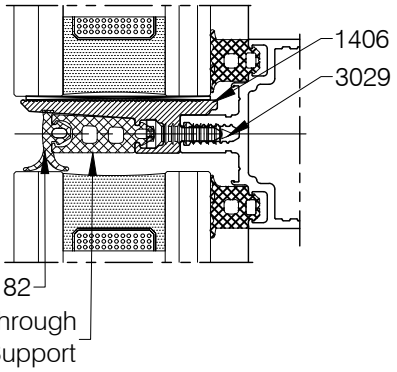

4 Side SG or 2 Side SGV

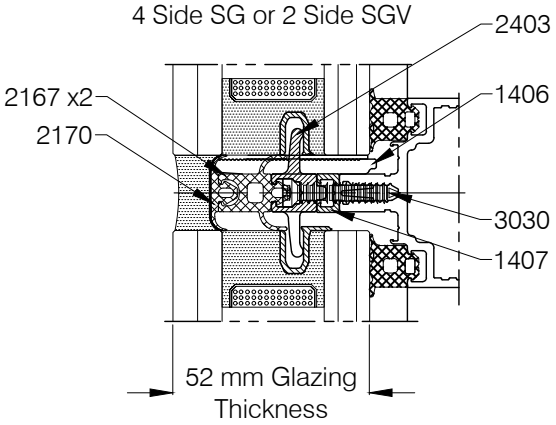

Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 04-17

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Structural sealed units



A Sealant dimension C (side line spacer)

The sealant dimension (A) is set by your glass supplier according to standards and calculations made and as set by the structural sealant supplier (re: warranty)

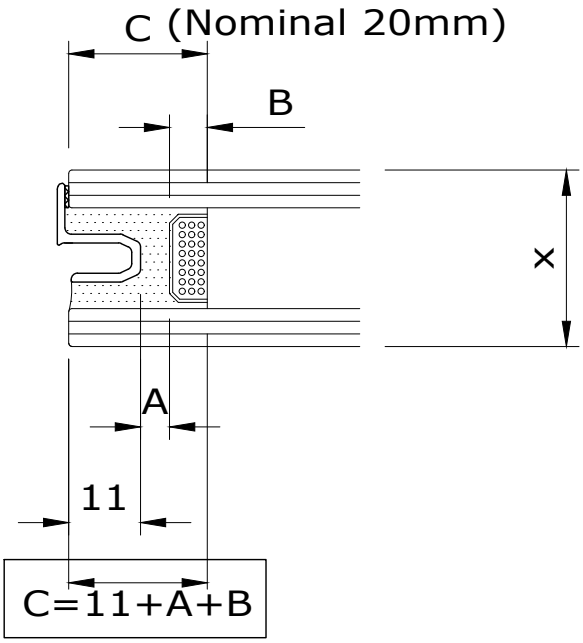

3.02

B Sealant dimension A

Dimension A depends on and/or will be influenced by:

- if for 2 or 4 sided structural glazing
- Project situation (location- building height etc.) requirements / windload etc.
- Glazing insert length (standard length / pcs = 100mm)
- Number of inserts used (depends on if 2 or 4 sided structural glazing)
- Glass size / load - weight
- Structural Sealant type used

C Other

For further information, details and options please check Fabrication details

Comar 6EFT

Glazing thickness & inserts



3.03

Fabricators Guide

Double or Triple Glass Panel- 2 Side SGH, 2 Side SGV, 4 Side SG

Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	Inner Glass Pane (mm) 8-9	Inner Glass Pane (mm) 10-11
6-7, 8-9, 10-11, 12-13	2401	2402	2405

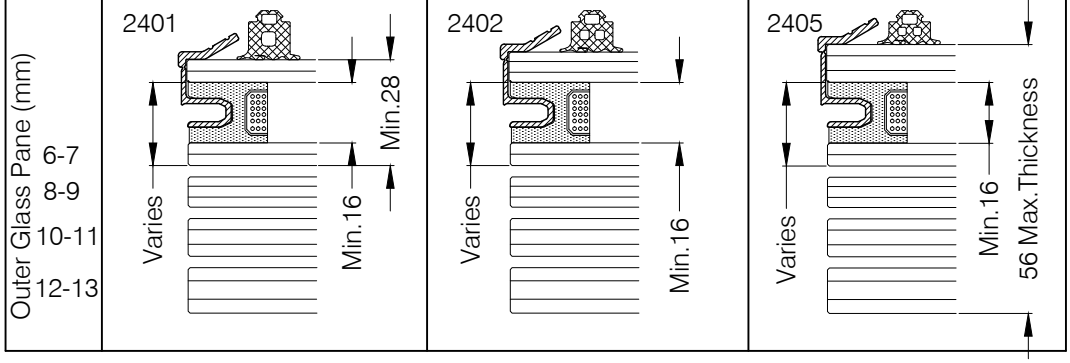

Double or Triple Glass Panel- 2 Side SGH, 2 Side SGV, 4 Side SG

Outer Glass Pane (mm)	Inner Glass Pane (mm) 12-13	14-15	16-17	18
6-7, 8-9, 10-11, 12-13	2416	2418	2420	2420

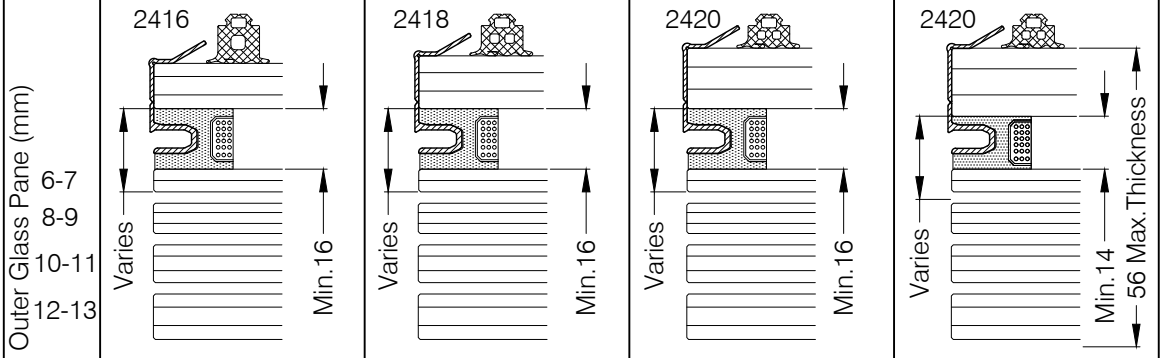

Single Glass Panel- 2 Side SGH, 2 Side SGV, 4 Side SG

Outer Glass Pane (mm) 6-7	8-9	10-11	12-13

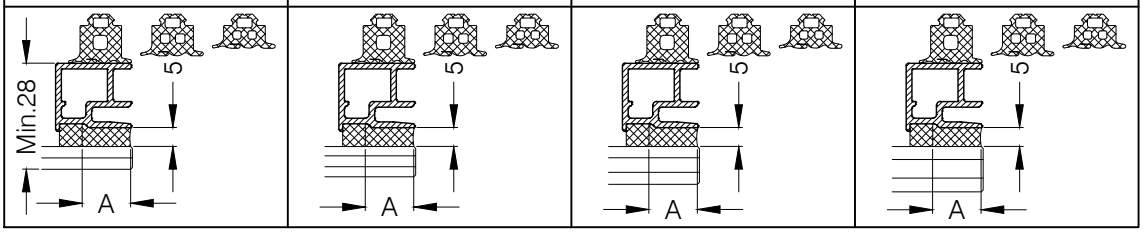

The sealant dimension (A) is set by your glass supplier according to standards and calculation.
For details see Glazing Chart.
For glazing thickness above 56mm please contact Technical Support.

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Glazing Chart Explanation
4 sided SG C.W.



3.04

Glazing Pocket 48mm		Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness 34	36	38
2102	6mm 2101	12			X			X
		10						18
		8					18	20
		6				18	20	22
2104	8mm 2103	12		X			X	18
		10					18	20
		8				18	20	22
		6				20	22	24
2106	10mm 2105	12	X			X	18	20
		10				18	20	22
		8				20	22	24
		6				22	24	

X = 16mm Minimum glazing spacer

Highlighted options in row indicate same outer glazing thickness

*Glazing Spacer Guide Size

Highlighted Options

Highlighted options in column indicate outer glazing faces are aligned

*when choosing larger spacer sizes consult spacer manufacture and confirm correct components are selected, ie: gaskets, supports, clamps & drainage diverters.

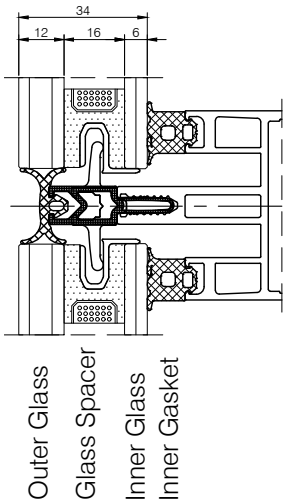

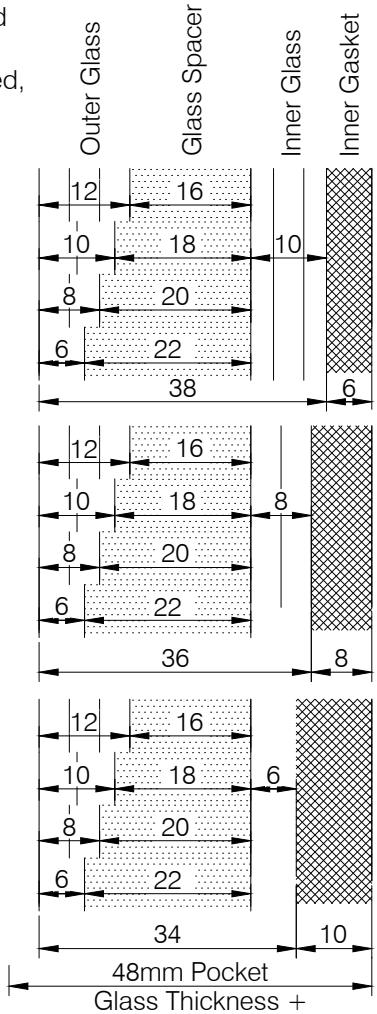

Highlighted Options

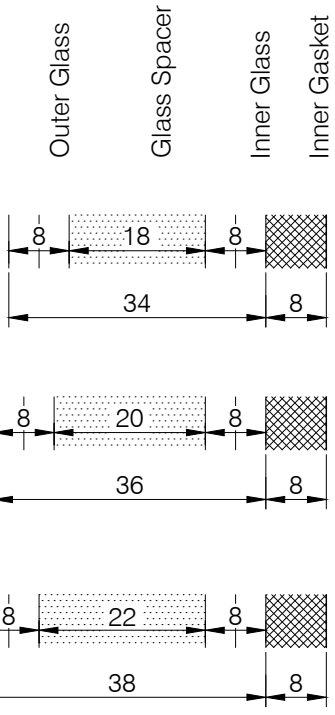

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Comar 6EFT

Gaskets & glazing pockets



Important information

A **Internal gaskets**

For gaskets from 6 to 16 mm moulded corners are available to ensure secure excellent performance regarding water / air tightness. Seal joints with recommended sealant.

4 corners are required per frame, see sketch.

3.05

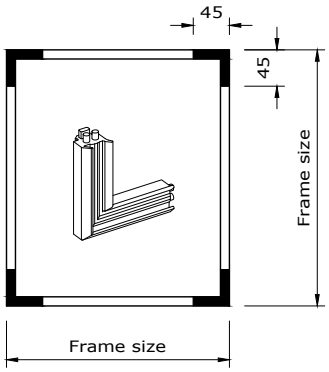

For other gasket sizes or types,
please contact Comar's technical department.

B **External gaskets / gasket options:**

Vertical and horizontal , **Single gasket**
EFT 2163 (6mm) or EFT 2164(8mm) etc.

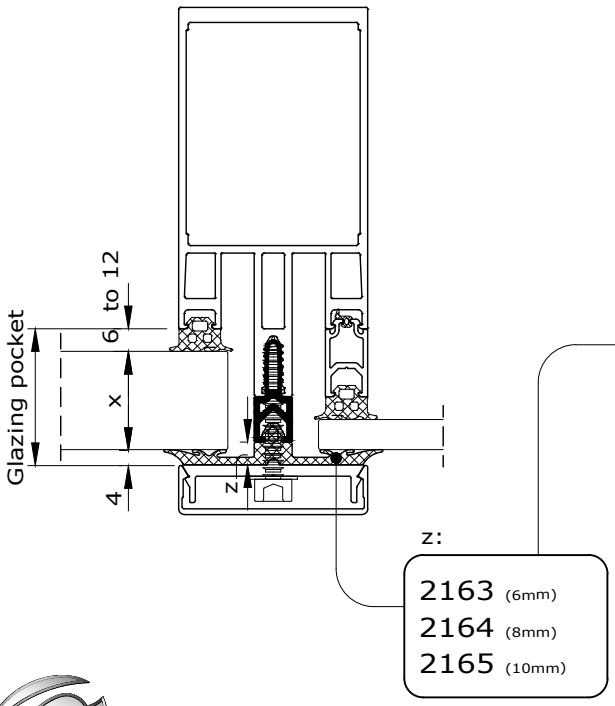

"Single" gasket

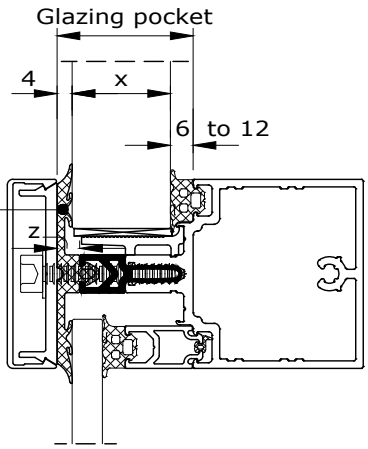

Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped curtain wall

GLAZING POCKET 24	Glazing Thickness (mm)					
	4	6	8	10	12	14
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
2163- 6mm Pressure Plate Gasket						
2301- 15mm Glass Support						
3006- 25mm Screw 3091- Washer						

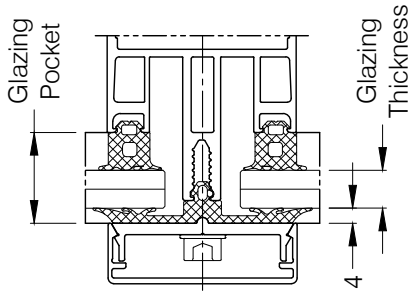

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT

Capped curtain wall



3.07

Fabricators Guide

GLAZING POCKET 36	Glazing Thickness Reference "X" (mm)					
	16	18	20	22	24	26
2102 6mm 2101			Y			X
2104 8mm 2103		Y			X	
2106 10mm 2105	Y			X		
2108 12mm 2107			X			Y
2110 14mm 2109		X			Y	
2112 16mm 2111	X			Y		
2490 6mm 1330				Y	Y	Y
2490 18mm 1328	Y	Y	Y			
Glazing Thickness Reference "Y" (mm)	4	6	8	10	12	14
	2163- 6mm Pressure Plate Gasket					
	2197- 12mm Thermal Break					
	2305- 27mm Glass Support					
	3008 - 38mm Screw 3091 - Washer					
	2021- 50mm Drainage Diverter					

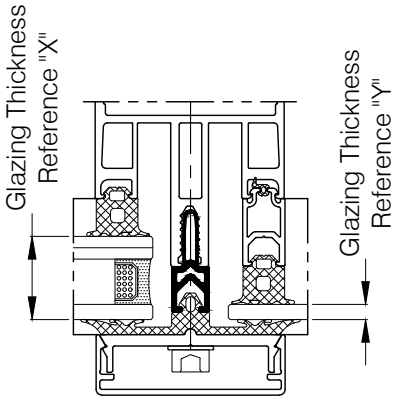

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped curtain wall



3.08

GLAZING POCKET 42			Glazing Thickness Reference "X" (mm)					
			22	24	26	28	30	32
2102 6mm 2101					Y			X
2104 8mm 2103				Y			X	
2106 10mm 2105			Y			X		
2108 12mm 2107		Y			X			Y
2110 14mm 2109	Y			X			Y	
2112 16mm 2111			X			Y		
2490 6mm 1330						Y	Y	Y
2490 18mm 1328	Y	Y	Y	Y	Y			
Glazing Thickness Reference "Y" (mm)	6	8	10	12	14	16	18	20

	2163- 6mm Pressure Plate Gasket
	2200- 18mm Thermal Break
	1401 - 28mm Glass Support + 2153- 6mm Gasket
	3029-23mm Screw
OR	2306- 33mm Glass Support 1409- 33mm Glass Support
	3090- 42mm Screw 3091- Washer
	2020- 56mm Drainage Diverter

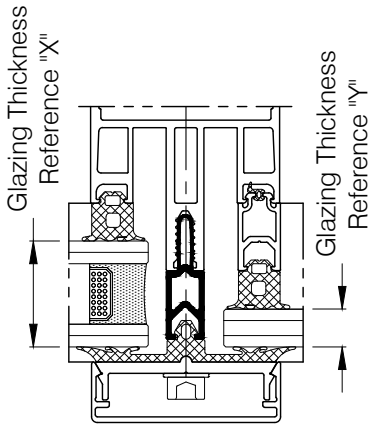

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts

3

Comar 6EFT

2 sided SGH & SGV c.w.



3.09

GLAZING POCKET 42	Outer Glass Pane (mm)	Inner Glass Pane (mm)			Glazing Thickness (mm)		
	6	6-7	8-9	10-11	28	30	32
2102 6mm 2101	X			X			X
2104 8mm 2103	X		X			X	
2106 10mm 2105	X	X			X		

2153 OR	1401-28mm Glass Support
	1409- 33mm Glass Support
	3029-23mm Screw
	2163-6mm Pressure Plate Gasket
	3090+ 3091 42mm Screw + Washer
	2020 56mm Drainage Diverter
	2200-18mm Thermal Break
OR	2170- 2mm Joint Gasket
OR	2182- 2mm Joint Gasket
	2175- 7mm Joint Gasket
	2197- 12mm Thermal Break
	2403- 12mm Double Glazing Clamp

STRUCTURAL

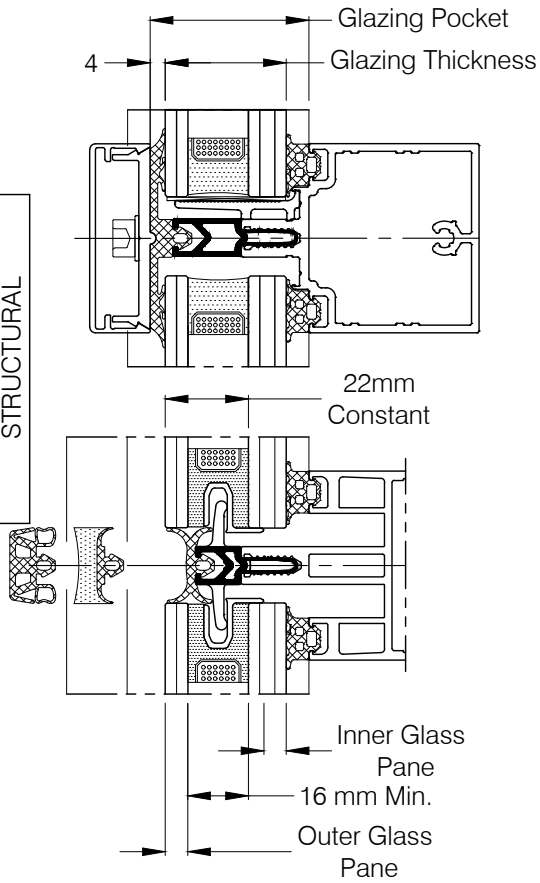

Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

4 sided SG c.w.

Comar 6EFT



3.10

GLAZING POCKET 42	Outer Glass Pane (mm)	Inner Glass Pane (mm)			Glazing Thickness (mm)		
	6	6-7	8-9	10-11	28	30	32
2102 6mm 2101	X			X			X
2104 8mm 2103	X		X			X	
2106 10mm 2105	X	X			X		

2153	1401-28mm Glass Support
OR	1409- 33mm Glass Support
	3029-23mm Screw
	2021 50mm Drainage Diverter
	2170- 2mm Joint Gasket
OR	2182- 2mm Joint Gasket
OR	2175- 7mm Joint Gasket
	2197- 12mm Thermal Break
	2403- 12mm Double Glazing Clamp

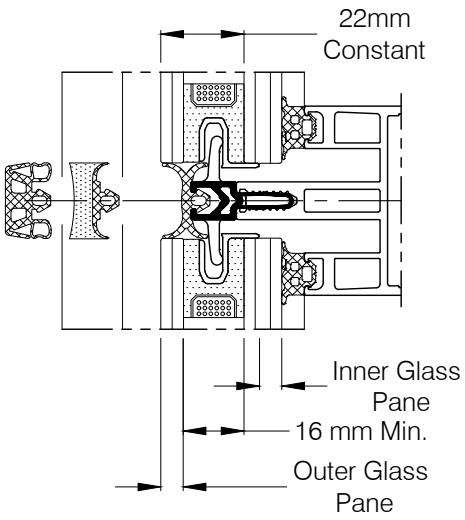

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT

Capped curtain wall

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

3.11

Fabricators Guide

GLAZING POCKET 48	Glazing Thickness Reference "X" (mm)										
	28	30	32	34	36	38
2102 6mm 2101			Y			X
2104 8mm 2103		Y			X	
2106 10mm 2105	Y			X		
2108 12mm 2107			X			Y
2110 14mm 2109		X			Y	
2112 16mm 2111	X			Y		
2490 6mm 1330				Y	Y	Y
2490 18mm 1328	Y	Y	Y			
2490 22mm 1329	Y	Y				

Glazing Thickness Reference "Y" (mm)	6	8	10	12	14	16	18	20	22	24	26

	2163 - 6mm Pressure Plate Gasket
	2200 - 18mm Thermal Break
+	1407 - 36mm Glass Support + 2153 - 6mm Gasket
OR	3029 - 23mm Screw
	1411 - 40mm Glass Support
	2166 6mm High Preformed Gasket
	3010 - 50mm Screw 3091 - Washer
	2026 - 64mm Drainage Diverter

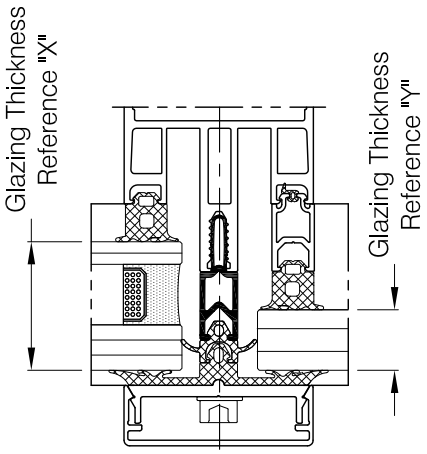

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

2 sided SGH & SGV c.w.

Comar 6EFT



3.12

GLAZING POCKET 48	Outer Glass Pane (mm)	Inner Glass Pane (mm)			Glazing Thickness (mm)		
	12	6-7	8-9	10-11	34	36	38
2102 6mm 2101	X			X			X
2104 8mm 2103	X		X			X	
2106 10mm 2105	X	X			X		

2153 OR	1407-36mm Glass Support	STRUCTURAL
	1411- 40mm Glass Support	
	3029-23mm Screw	
	2163-6mm Pressure Plate Gasket	
	3010+ 3091 50mm Screw + Washer	
	2026 64mm Drainage Diverter	
	2200-18mm Thermal Break	
	2166- 6mm Gasket	
OR	2170- 2mm Joint Gasket	
OR	2182- 2mm Joint Gasket	
	2175- 7mm Joint Gasket	
	2403- 12mm Double Glazing Clamp	

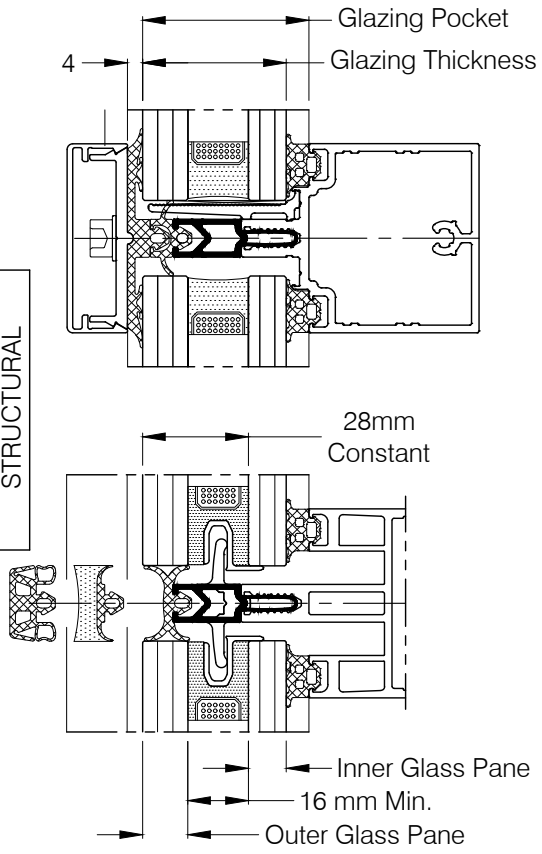

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT

2 sided SGH & SGV c.w.



3.13

GLAZING POCKET 48	Outer Glass Pane (mm)	Inner Glass Pane (mm)				Glazing Thickness (mm)		
	6	12-13	14-15	16-17	18#	34	36	38
2102 6mm 2101	X			X	X			X
2104 8mm 2103	X		X				X	
2106 10mm 2105	X	X				X		

2153 OR	1407-36mm Glass Support	
	1411- 40mm Glass Support	
	3029-23mm Screw	
	2163-6mm Pressure Plate Gasket	
	3010+ 3091 50mm Screw + Washer	
	2026 64mm Drainage Diverter	
	2200-18mm Thermal Break	
	2166- 6mm Gasket	
OR	2170- 2mm Joint Gasket	STRUCTURAL
OR	2182- 2mm Joint Gasket	
	2175- 7mm Joint Gasket	
	2403- 12mm Double Glazing Clamp	
	1390- 70mm Length	
	3030 29mm Screw	

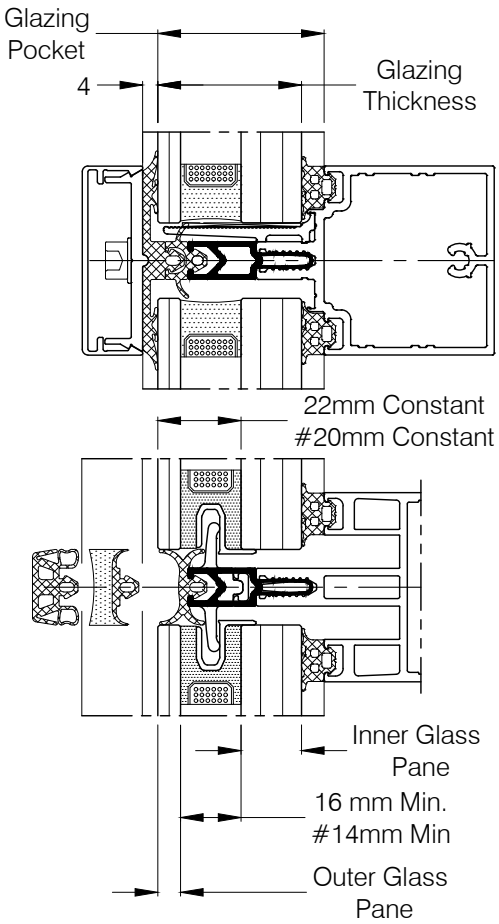

Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Comar 6EFT

4 sided SG c.w.



3.14

GLAZING POCKET 48		Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	12-13	14-15	16-17	18#	Glazing Thickness 34	36	38
2102 6mm 2101		12			X							X
		10										
		8										
		6						X				X
2104 8mm 2103		12		X							X	
		10										
		8										
		6					X				X	
2106 10mm 2105		12	X							X		
		10										
		8										
		6				X				X		
2153 OR	1407-36mm Glass Support											
	1411- 40mm Glass Support											
	3029-23mm Screw											
	2020 56mm Drainage Diverter											
	2200-18mm Thermal Break											
	2166- 6mm Gasket											
OR	2170- 2mm Joint Gasket											
OR	2182- 2mm Joint Gasket											
	2175- 7mm Joint Gasket											
	2403- 12mm Double Glazing Clamp											
	1390- 70mm Length											
	3030 29mm Screw											

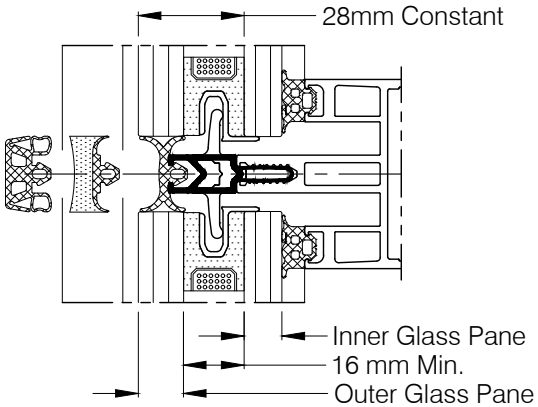

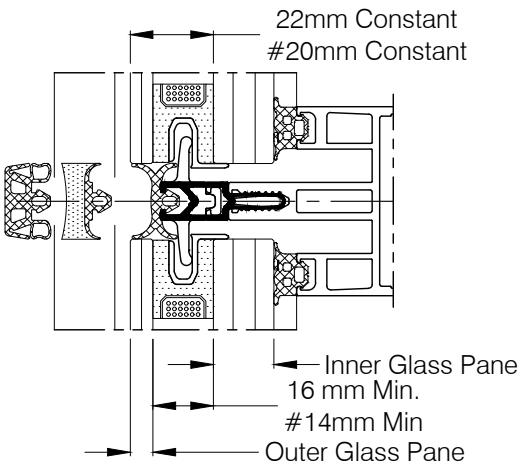

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT

Capped curtain wall



3.15

Fabricators Guide

GLAZING POCKET 54									Glazing Thickness Reference "X" (mm)					
									34	36	38	40	42	44
2102 6mm 2101											Y			X
2104 8mm 2103										Y			X	
2106 10mm 2105									Y			X		
2108 12mm 2107			Y					Y			X			Y
2110 14mm 2109		Y			Y		Y			X			Y	
2112 16mm 2111	Y			Y		Y			X			Y		
2490 6mm 1330	Y	Y	Y									Y	Y	Y
2490 18mm 1328						Y	Y	Y	Y	Y	Y			
2490 22mm 1329	Y	Y	Y	Y	Y									
Glazing Thickness Reference "Y" (mm)	6	8	10	12	14	16	18	20	22	24	26	28	30	32

	2165- 10mm Pressure Plate Gasket
	2200- 18mm Thermal Break
	1404 - 40mm Glass Support + 2153- 6mm Gasket
	2167 8mm High Preformed Gasket
	3029-23mm Screw
	3011- 55mm Screw 3091- Washer
	2026- 64mm Drainage Diverter

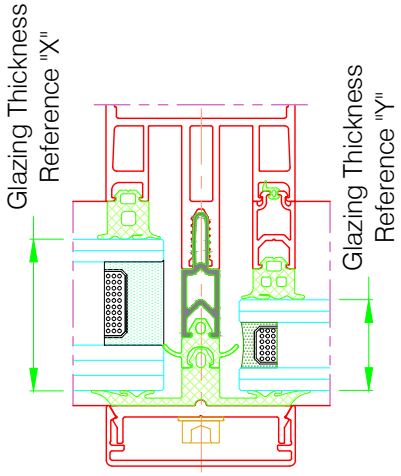

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

2 sided SGH & SGV c.w.

Comar 6EFT



3.16

GLAZING POCKET 54		Inner Glass Pane (mm)			Glazing Thickness (mm)		
		6-7	8-9	10-11	40	42	44
2102 + 6mm 2101				X			X
2104 + 8mm 2103			X			X	
2106 + 10mm 2105		X			X		
	1404- 40mm Glass Support 2153 - 6mm Gasket						
	3029- 23mm Screw						
	2165- 10mm Pressure Plate Gasket						
	3011+ 3091 55mm Screw + Washer						
	2167 8mm Gasket						
	2200-18mm Thermal Break						
	2166- 6mm Gasket						
OR	2170 Joint Gasket						
OR	2182 Joint Gasket						
	2175 Joint Gasket						
	2403 12mm Glazing Clamp 2153 - 6mm Gasket						
	2026 64mm Drainage Diverter						

STRUCTURAL

OUTER GLASS PANE MAX. 12-13mm

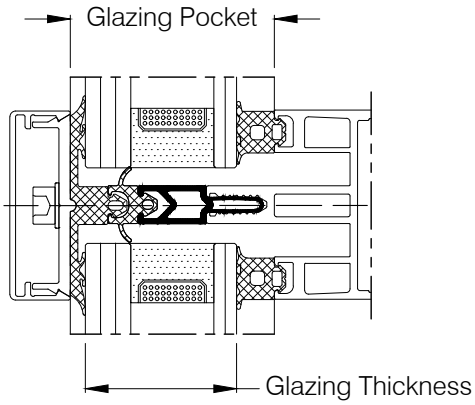

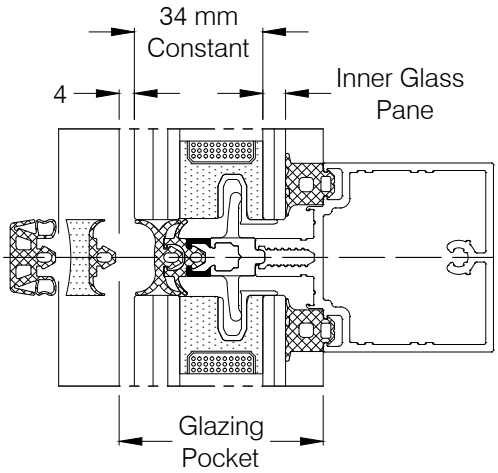

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT

2 sided SGH & SGV c.w.



3.17

Fabricators Guide

GLAZING POCKET 54	Inner Glass Pane (mm)				Glazing Thickness (mm)		
	12-13	14-15	16-17	18#	40	42	44
2102 6mm 2101			X	X			X
2104 8mm 2103		X				X	
2106 10mm 2105	X				X		

	1404- 40mm Glass Support 2153- 6mm Gasket
	3029-23mm Screw
	2165- 10mm Pressure Plate Gasket
	3011+ 3091 55mm Screw + Washer
	2167 8mm- Gasket
	2200-18mm Thermal Break
	2166 6mm- Gasket
	2170 Joint Gasket
OR	2182 Joint Gasket
OR	2175 Joint Gasket
	2403 12mm Glazing Clamp
	1390 - 70mm Length
	3030 29mm Screw
	2026 64mm Drainage Diverter

STRUCTURAL

OUTER GLASS PANE MAX. 12-13mm

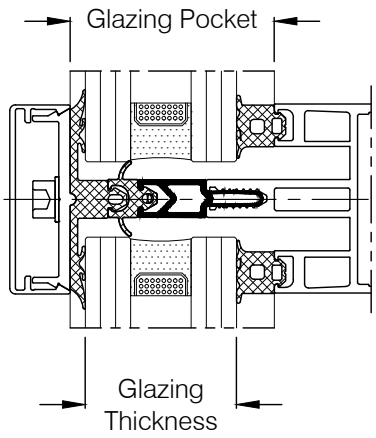

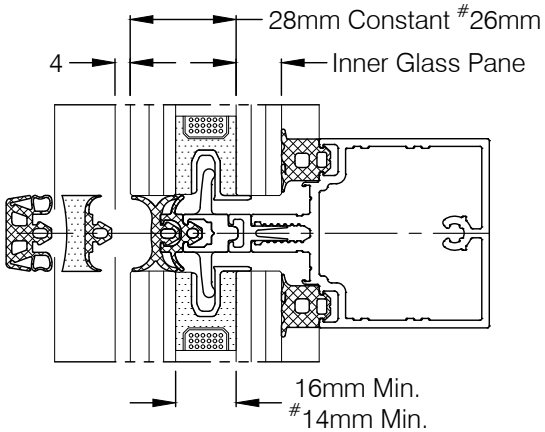

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

4 sided SG C.W.



3.18

GLAZING POCKET 54	Inner Glass Pane (mm)							Glazing Thickness (mm)		
	6-7	8-9	10-11	12-13	14-15	16-17	18#	40	42	44
2102 6mm 2101			X			X	X			X
2104 8mm 2103		X			X				X	
2106 10mm 2105	X			X				X		
1404- 40mm Glass Support	X	X	X	X	X	X	X			
2153 6mm- Gasket	X	X	X	X	X	X	X			
3029 23mm Screw	X	X	X	X	X	X	X			
3030 29mm Screw				X	X	X	X			
1390 70mm Length				X	X	X	X			
2200 18mm Thermal Break										
2166 6mm- Gasket										
2403 12mm Double Glazing Clamp										
2170 Joint Gasket										
OR 2182 Joint Gasket										
OR 2175 Joint Gasket										
2020 56mm Drainage Diverter										

OUTER GLASS PANE MAX. 12-13mm

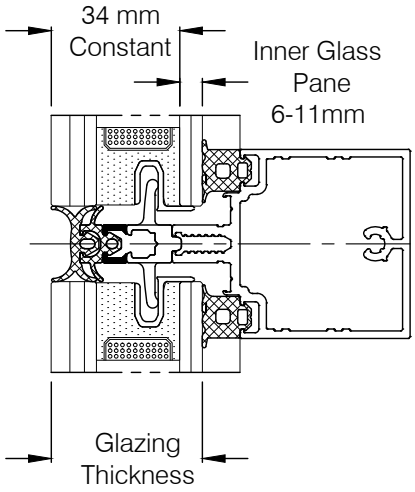

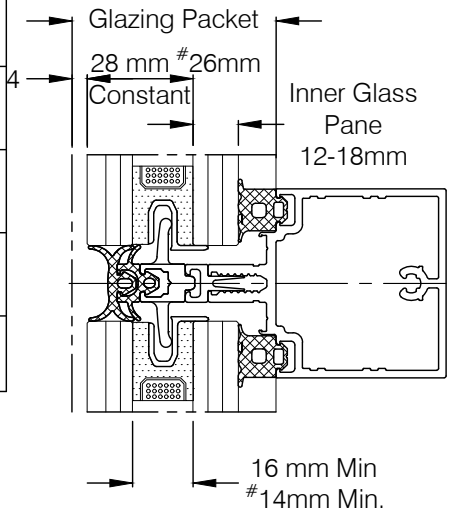

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT

Capped curtain wall

3.19

Fabricators Guide

GLAZING POCKET 60									Glazing Thickness Reference "X" (mm)					
									40	42	44	46	48	50
2102 6mm 2101											Y			X
2104 8mm 2103										Y			X	
2106 10mm 2105									Y			X		
2108 12mm 2107			Y					Y			X			Y
2110 14mm 2109		Y			Y		Y			X			Y	
2112 16mm 2111	Y			Y		Y			X			Y		
2490 6mm 1330	Y	Y	Y									Y	Y	Y
2490 18mm 1328						Y	Y	Y	Y	Y	Y			
2490 22mm 1329	Y	Y	Y	Y	Y									
Glazing Thickness Reference "Y" (mm)	12	14	16	18	20	22	24	26	28	30	32	34	36	38

	2164- 8mm Pressure Plate Gasket
	2203- 34mmThermal Break
	1405 - 48mm Glass Support + 2155 - 22mm Gasket
OR	
	*1400 - 44mm Glass Support + 2155 - 22mm Gasket
	3029-23mm Screw
	3012- 60mm Screw 3091- Washer
	2027- 72mm Drainage Diverter

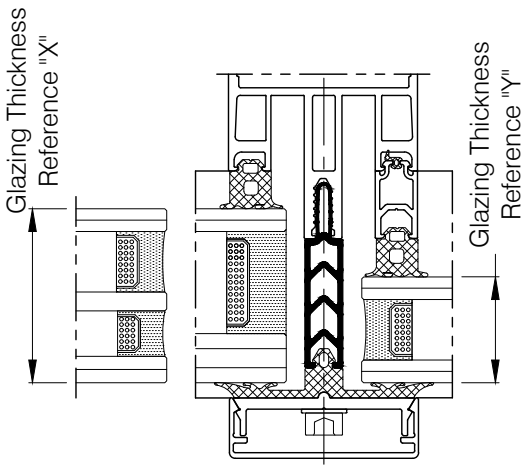

*Note! Use of 1400 Glass Support as option to 1405 only when external glass pane is 8mm or over in thickness.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Comar 6EFT

2 sided SGH & SGV c.w.



3.20

GLAZING POCKET 60		Inner Glass Pane (mm)			Glazing Thickness (mm)		
		6-7	8-9	10-11	46	48	50
2102 / 6mm 2101				X			X
2104 / 8mm 2103			X			X	
2106 / 10mm 2105		X			X		
	1405- 48mm Glass Support 2153 6mm Gasket (for SGV) 2155 22mm Gasket (for SGH)						
OR	1400- 44mm Glass Support 2153 6mm Gasket (for SGV) 2155 22mm Gasket (for SGH)						
	3029- 23mm Screw						
	2164- 8mm Pressure Plate Gasket						
	3012+ 3091 60mm Screw + Washer						
	2203 - 34mm Thermal Break						
	2166 6mm Gasket x 2						
	2200- 18mm Thermal Break						
	2170 Joint Gasket						
OR	2182 Joint Gasket						
OR	2175 Joint Gasket						
	2403 12mm Glazing Clamp 2153 6mm Gaskett						
	2027 72mm Drainage Diverter						

STRUCTURAL

OUTER GLASS PANE MAX. 12-13mm

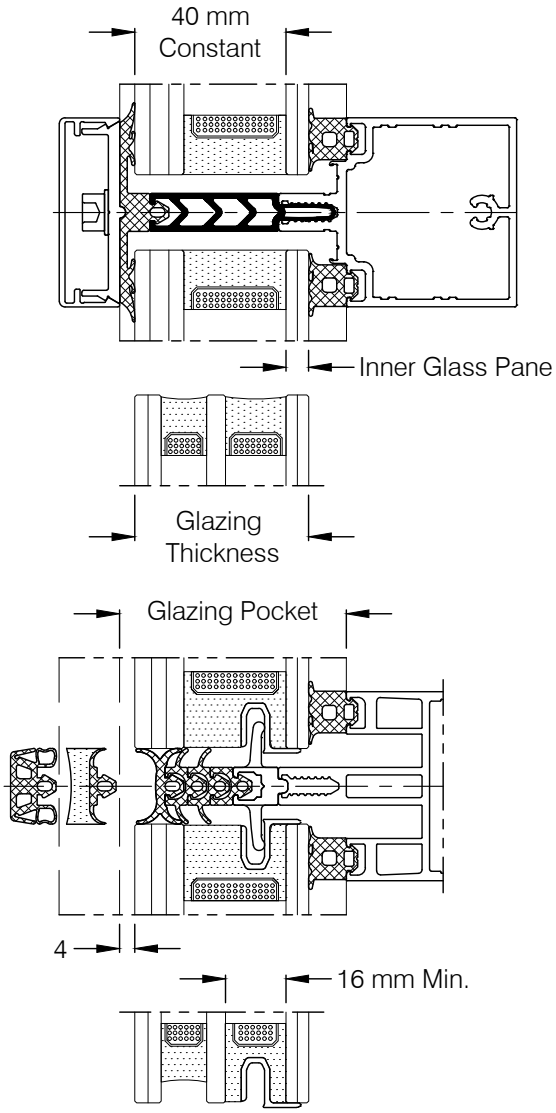

*Note! Use of 1400 glass support as option to 1405 only when external glass pane is 8mm or over in thickness.

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Fabricators Guide

Glazing charts 3

Comar 6EFT

2 sided SGH & SGV c.w.



3.21

GLAZING POCKET 60		Inner Glass Pane (mm)				Glazing Thickness (mm)		
Inner Glass Pane (mm)		12-13	14-15	16-17	18#	46	48	50
2102 6mm 2101				X	X			X
2104 8mm 2103			X				X	
2106 10mm 2105		X				X		
	1405- 48mm Glass Support 2153 6mm Gasket (for SGV) 2155 22mm Gasket (for SGH)							
OR	1400- 44mm Glass Support 2153 6mm Gasket (for SGV) 2155 22mm Gasket (for SGH)							
	3029- 23mm Screw							
	2164- 8mm Pressure Plate Gasket							
	3012+ 3091 60mm Screw + Washer							
	2203-34mm Thermal Break							
	2166- 6mm Gasket x 2							
	2200- 18mm Thermal Break							
	2170 Joint Gasket							
OR	2182 Joint Gasket							
OR	2175 Joint Gasket							
	2403 12mm Double Glazing Clamp							
	1390- 70mm Length							
	3030 29mm Screw							
	2027 72mm Drainage Diverter							

STRUCTURAL

OUTER GLASS PANE MAX. 12-13mm

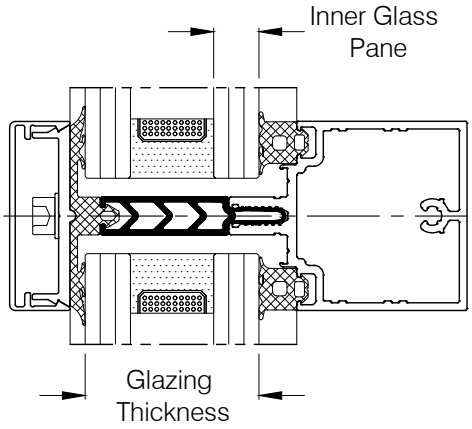

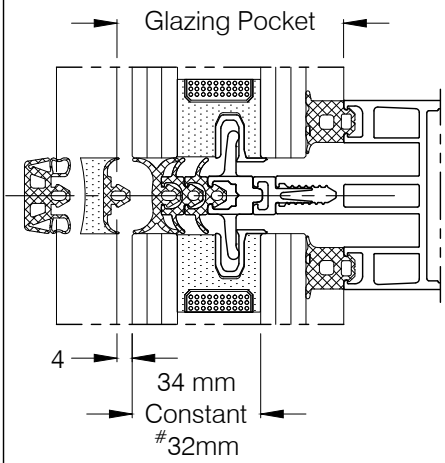

*Note! Use of 1400 glass support as option to 1405 only when external glass pane is 8mm or over in thickness.

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Fabricators Guide

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Comar 6EFT

4 side SG C.W.



GLAZING POCKET 60	Inner Glass Pane (mm)							Glazing Thickness (mm)		
	6-7	8-9	10-11	12-13	14-15	16-17	18#	46	48	50
2102 6mm 2101			X			X	X			X
2104 8mm 2103		X			X				X	
2106 10mm 2105	X			X				X		
1405- 48mm Glass Support OR 1400 44mm Glass Support	X	X	X	X	X	X	X			
2153 6mm- Gasket	X	X	X	X	X	X	X			
3029 23mm Screw	X	X	X	X	X	X	X			
2166 6mm- Gasket x 2	X	X	X	X	X	X	X			
2200 18mm Thermal Break	X	X	X	X	X	X	X			
3030 29mm Screw				X	X	X	X			
1390 70mm Length				X	X	X	X			
2403 12mm Double Glazing Clamp										
2170 Joint Gasket										
OR 2182 Joint Gasket										
OR 2175 Joint Gasket										
2026 64mm Drainage Diverter										

OUTER GLASS PANE MAX. 12-13mm

3.22

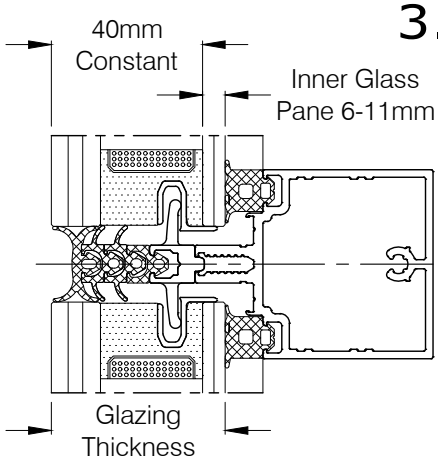

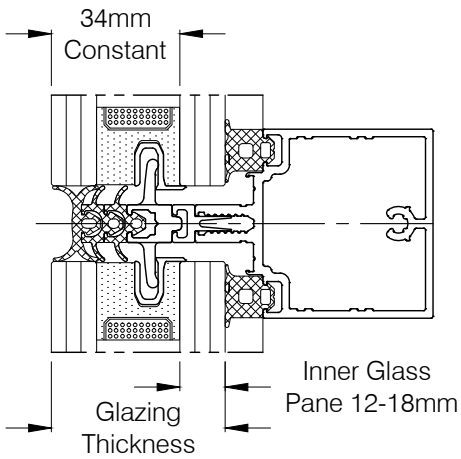

*Note! Use of 1400 glass support as option to 1405 only when external glass pane is 8mm or over in thickness.

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT

Capped curtain wall



3.23

Fabricators Guide

GLAZING POCKET 66									Glazing Thickness Reference "X" (mm)					
									46	48	50	52	54	56
2102 6mm 2101											Y			X
2104 8mm 2103										Y			X	
2106 10mm 2105									Y			X		
2108 12mm 2107			Y					Y			X			Y
2110 14mm 2109		Y			Y		Y			X			Y	
2112 16mm 2111	Y			Y		Y			X			Y		
2490 6mm 1330	Y	Y	Y									Y	Y	Y
2490 18mm 1328						Y	Y	Y	Y	Y	Y			
2490 22mm 1329	Y	Y	Y	Y	Y									
Glazing Thickness Reference "Y" (mm)	18	20	22	24	26	28	30	32	34	36	38	40	42	44

	2163- 6mm Pressure Plate Gasket
	2203- 34mm Thermal Break
	1406 - 52mm Glass Support + 2155- 22mm Gasket
	2167 8mm High Preformed Gasket
	3029-23mm Screw
	3013- 65mm Screw 3091- Washer
	2021- 50mm Drainage Diverter + 2032- 35mm Drainage Extension

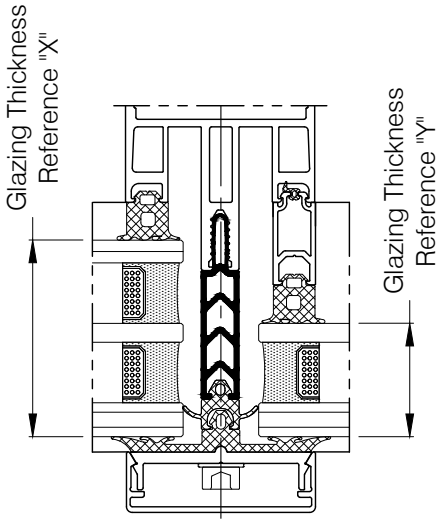

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

2 sided SGH & SGV c.w.

Comar 6EFT



3.24

GLAZING POCKET 66	Inner Glass Pane (mm)			Glazing Thickness (mm)		
	6-7	8-9	10-11	52	54	56
2102 6mm 2101			X			X
2104 8mm 2103		X			X	
2106 10mm 2105	X			X		

	1406- 52mm Glass Support 2155 22mm Gasket
	3029- 23mm Screw
	2163- 6mm Pressure Plate Gasket
	3013+ 3091 65mm Screw + Washer
	2167 8mm Gasket
	2203-34mm Thermal Break
	2170 Joint Gasket
OR	2182 Joint Gasket
OR	2175 Joint Gasket
	2155 22mm Gasket 2403 12mm Glazing Clamp
	2021 50mm Drainage Diverter+ 2032 35mm Drainage Extension

STRUCTURAL

OUTER GLASS PANE MAX. 12-13mm

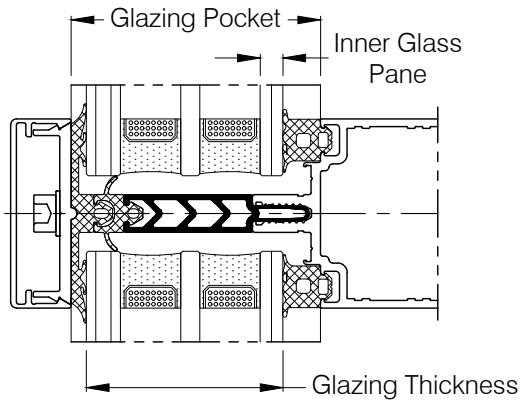

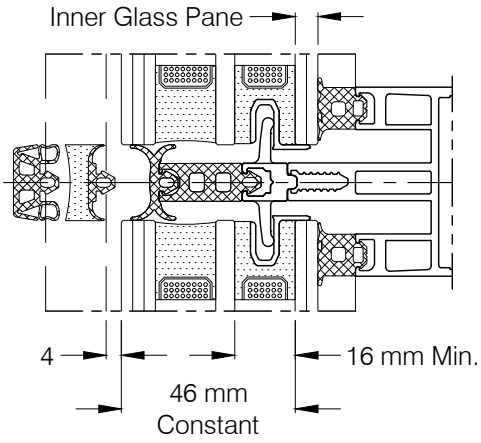

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT

2 sided SGH & SGV c.w.



3.25

GLAZING POCKET 66		Inner Glass Pane (mm)				Glazing Thickness (mm)		
		12-13	14-15	16-17	18#	52	54	56
2102	6mm 2101			X	X			X
2104	8mm 2103		X				X	
2106	10mm 2105	X				X		

	1406- 52mm Glass Support 2155 22mm Gasket	
	3029- 23mm Screw	
	2163- 6mm Pressure Plate Gasket	
	3013+ 3091 65mm Screw + Washer	
	2021 50mm Drainage Diverter+ 2032 35mm Drainage Extension	
	2203-34mm Thermal Break	
	2167 8mm Gasket	
	2167 8mm Gasket x 2	STRUCTURAL
	2170 Joint Gasket	
OR	2182 Joint Gasket	
OR	2175 Joint Gasket	
	2403 12mm Glazing Clamp	
	1390- 70mm Length	
	3030 29mm Screw	

OUTER GLASS PANE MAX. 12-13mm

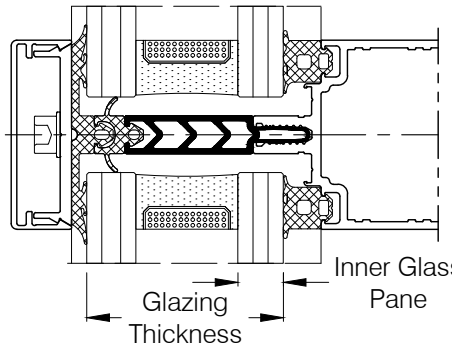

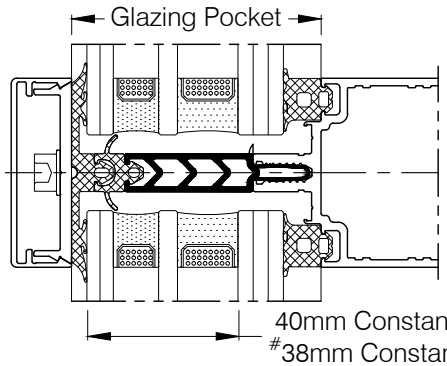

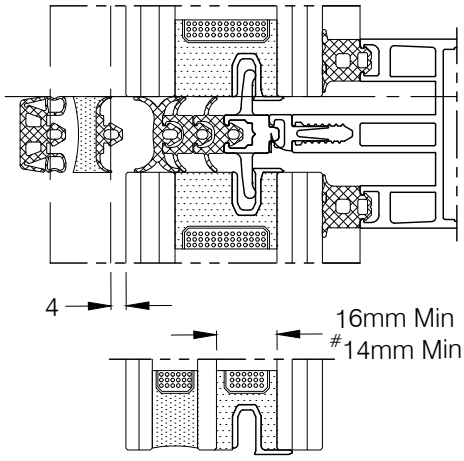

Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

4 sided SG C.W.

Comar 6EFT



3.26

GLAZING POCKET 66	Inner Glass Pane (mm)							Glazing Thickness (mm)		
	6-7	8-9	10-11	12-13	14-15	16-17	18#	52	54	56
2102 6mm 2101			X			X	X			X
2104 8mm 2103		X			X				X	
2106 10mm 2105	X			X				X		
1406- 52mm Glass Support	X	X	X	X	X	X	X			
2153 6mm- Gasket	X	X	X	X	X	X	X			
3029 23mm Screw	X	X	X	X	X	X	X			
2167 8mm- Gasket x 2				X	X	X	X			
2155 22mm- Gasket	X	X	X							
3030 29mm Screw				X	X	X	X			
1390 70mm Length				X	X	X	X			
2203- 34mm Thermal Break	X	X	X	X	X	X	X			
	2403 12mm Double Glazing Clamp									
OR	2170 Joint Gasket									
OR	2182 Joint Gasket									
	2175 Joint Gasket									
	2027 72mm Drainage Diverter									

OUTER GLASS PANE MAX. 12-13mm

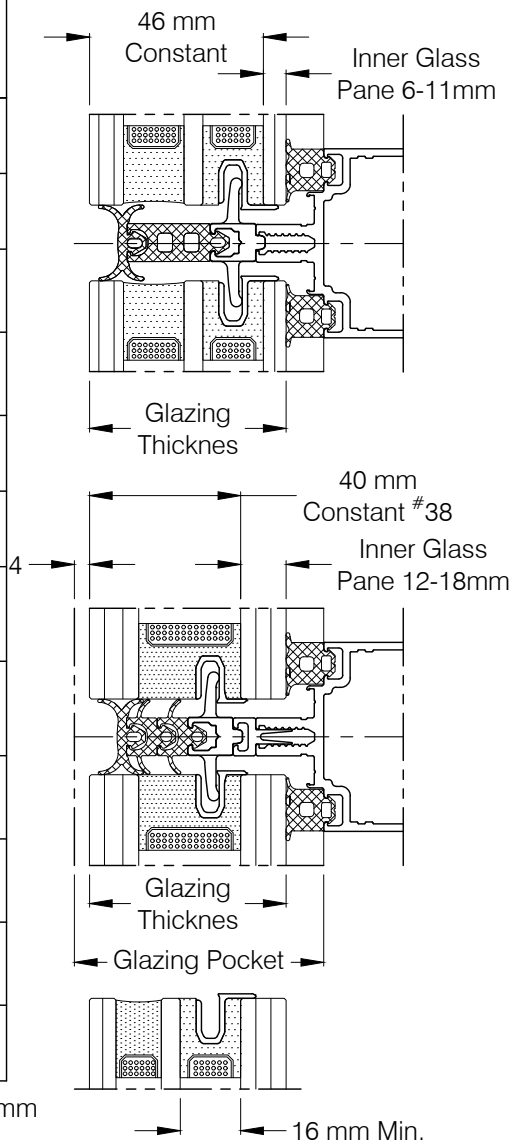

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT



3.27

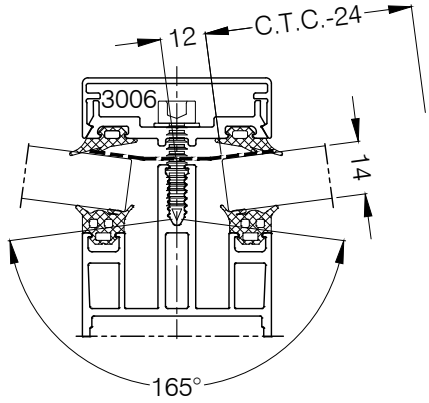

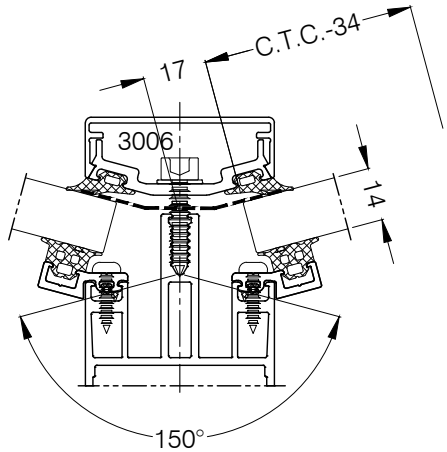

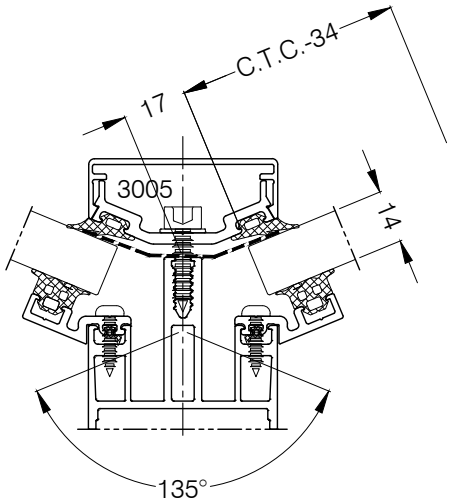

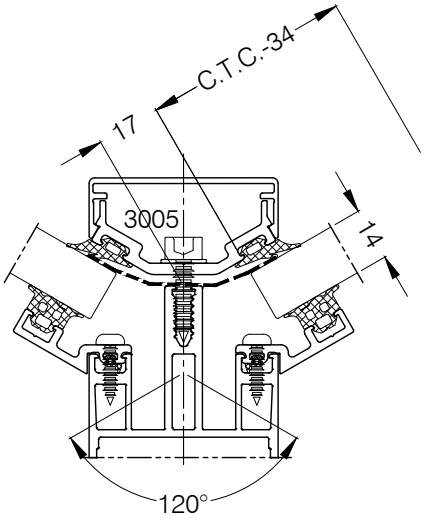

Capped curtain wall
Internal corner

GLAZING POCKET 24	Glazing Thickness (mm)					
	4	6	8	10	12	14
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
	1336-15° Glazing Adapter + 3021 Screw+2490 Gasket					
	1337-22.5° Glazing Adapter + 3021 Screw+2490 Gasket					
	1338-30° Glazing Adapter + 3021 Screw+2490 Gasket					
BUTYL	2150+ 6001 Pressure Plate Gasket					
	3005- 22mm Screw 3091- Washer					
	3006- 25mm Screw 3091- Washer					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped curtain wall
Internal corner

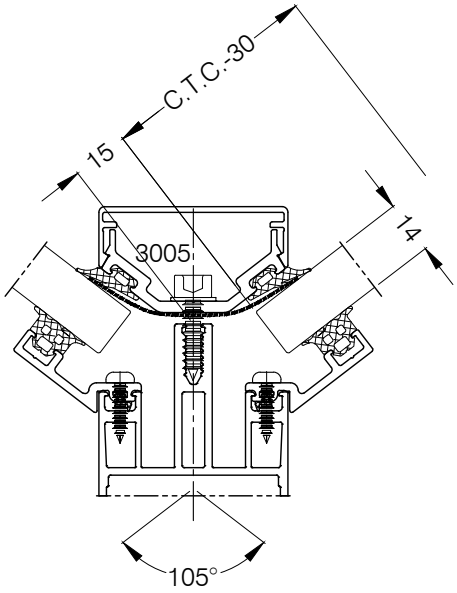

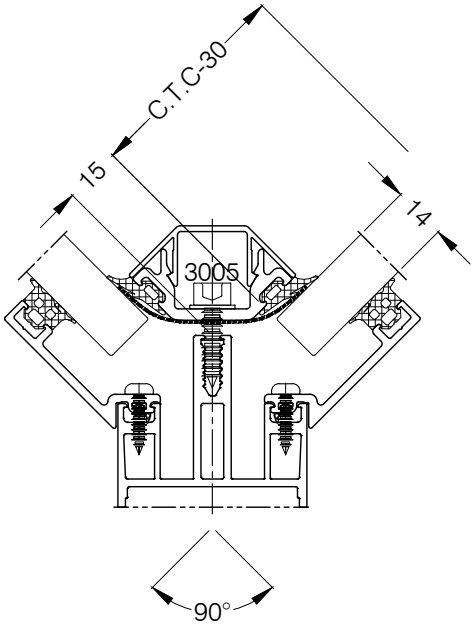

GLAZING POCKET 24	Glazing Thickness (mm)					
	4	6	8	10	12	14
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
	1339-37.5° Glazing Adapter + 3021 Screw+2490 Gasket					
	1344-45° Glazing Adapter +3021 Screw+2490 Gasket					
BUTYL	2150+ 6001or 6002 Pressure Plate Gasket					
	3005- 22mm Screw 3091- Washer					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

3.28

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT



3.29

Capped curtain wall
Internal corner

GLAZING POCKET 36	Glazing Thickness (mm)					
	16	18	20	22	24	26
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150+ 6001 Pressure Plate Gasket					
	1336-15° Glazing Adapter + 3021 Screw+2490 Gasket					
	1337-22.5° Glazing Adapter + 3021 Screw+2490 Gasket					
	1338-30° Glazing Adapter + 3021 Screw+2490 Gasket					
	2197-12mm Thermal Break					
	3007- 32mm Screw + 3091 Washer when Fit					
	3008- 38mm Screw + 3091 Washer when Fit					
	As required for ventilation					

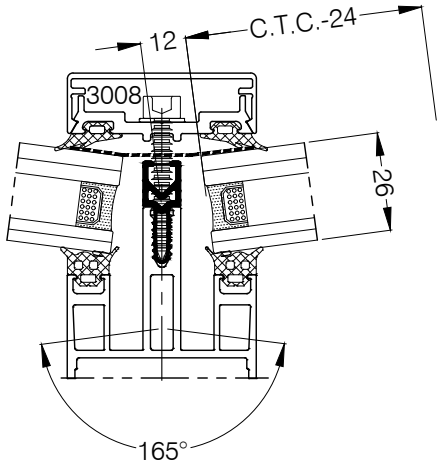

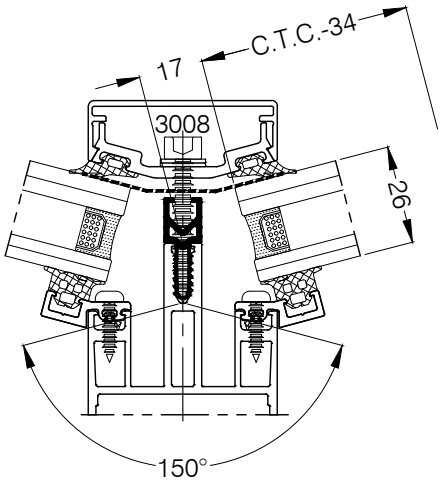

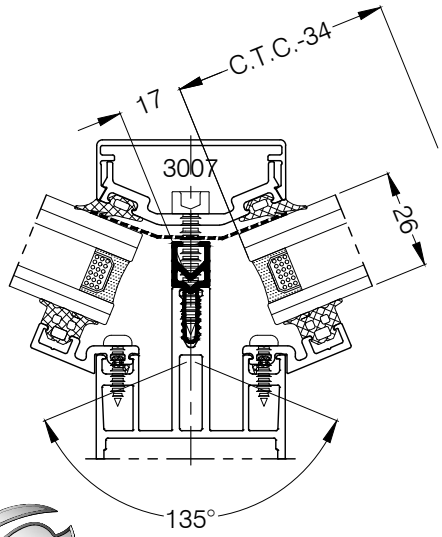

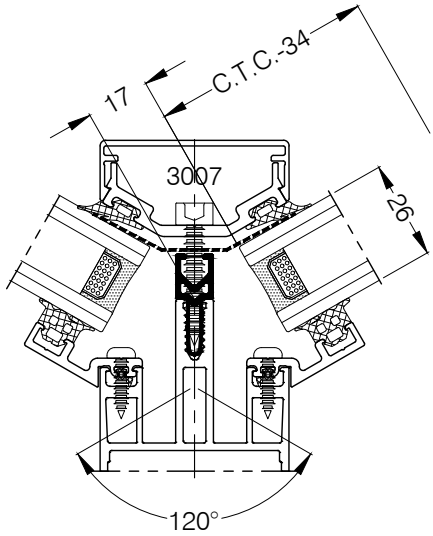

Fabricators Guide

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped curtain wall
Internal corner

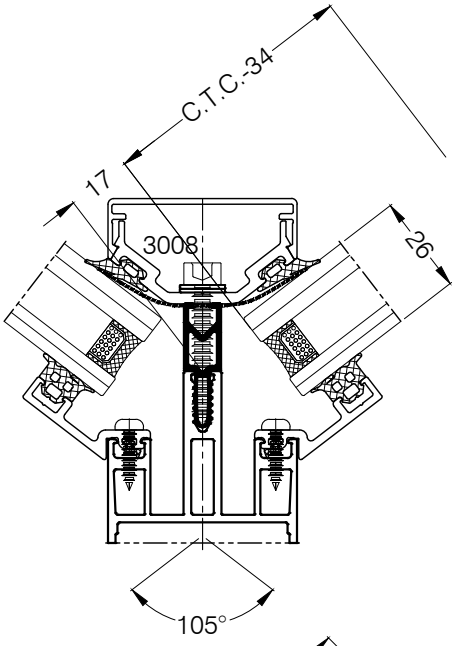

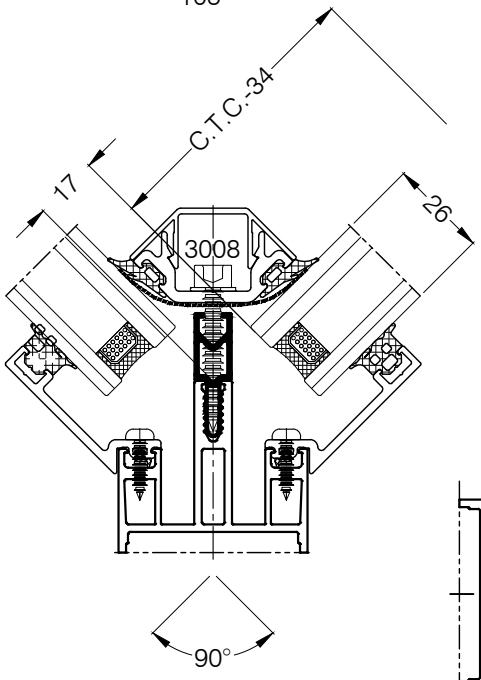

GLAZING POCKET 36	Glazing Thickness (mm)					
	16	18	20	22	24	26
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150+ 6001 Pressure Plate Gasket					
	1339-37.5° Glazing Adapter + 3021 Screw+2490 Gasket					
	1344-45° Glazing Adapter +3021 Screw+2490 Gasket					
	2200-18mm Thermal Break					
	3008- 38mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

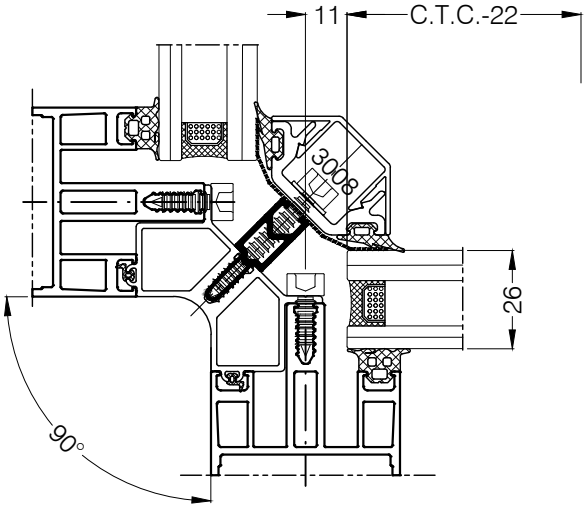

3.30

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts

3

Comar 6EFT

Capped curtain wall
Internal corner

3.31

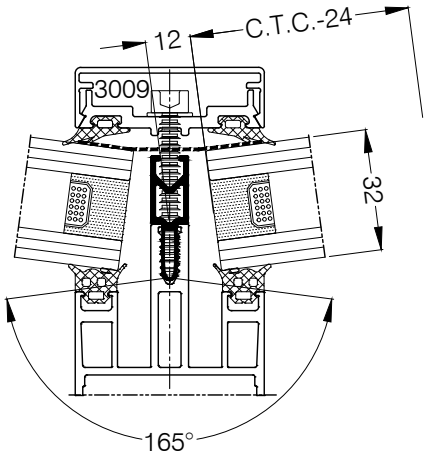

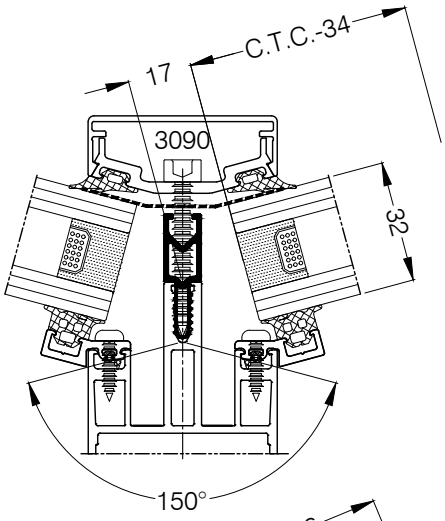

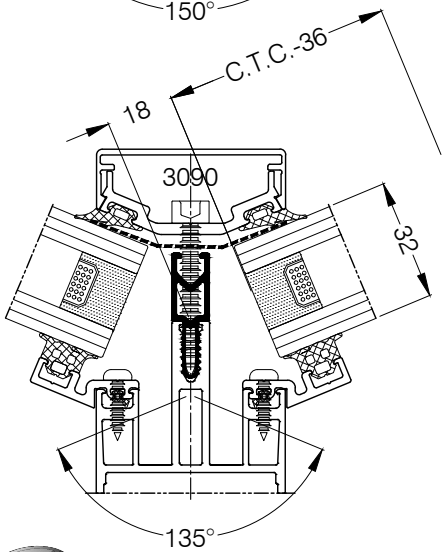

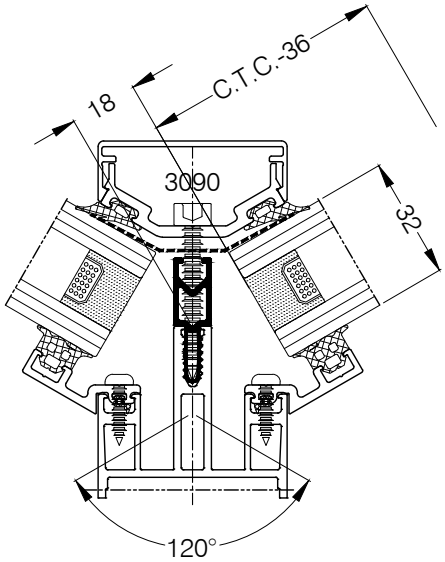

GLAZING POCKET 42	Glazing Thickness (mm)					
	22	24	26	28	30	32
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150+ 6001 Pressure Plate Gasket					
	1336-15° Glazing Adapter + 3021 Screw+2490 Gasket					
	1337-22.5° Glazing Adapter + 3021 Screw+2490 Gasket					
	1338-30° Glazing Adapter + 3021 Screw+2490 Gasket					
	2200-18mm Thermal Break					
	3090- 42mm Screw + 3091 Washer when Fit					
	3009- 45mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

Fabricaors Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

3 GLAZING CHART

Comar 6EFT

Capped curtain wall
Internal corner

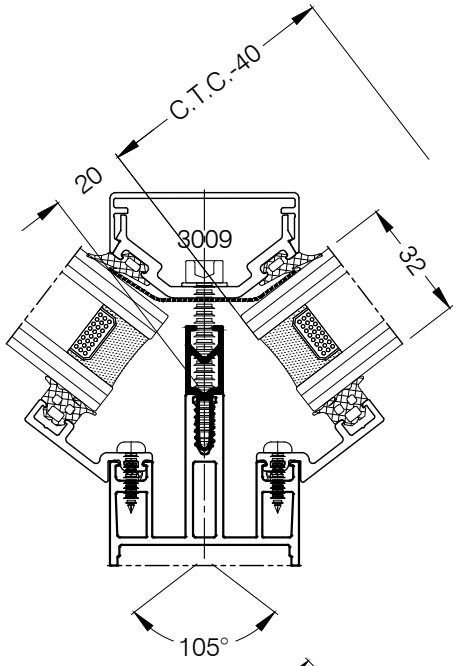

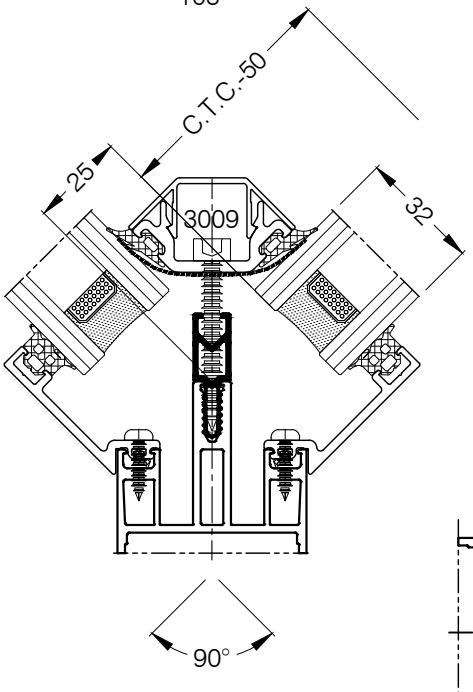

GLAZING POCKET 42	Glazing Thickness (mm)					
	22	24	26	28	30	32
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150+ 6001 Pressure Plate Gasket					
	1339-37.5° Glazing Adapter + 3021 Screw+2490 Gasket					
	1344-45° Glazing Adapter +3021 Screw+2490 Gasket					
	2200-18mm Thermal Break					
	3009- 45mm Screw + 3091 Washer when Fit					
	As required for drainage					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

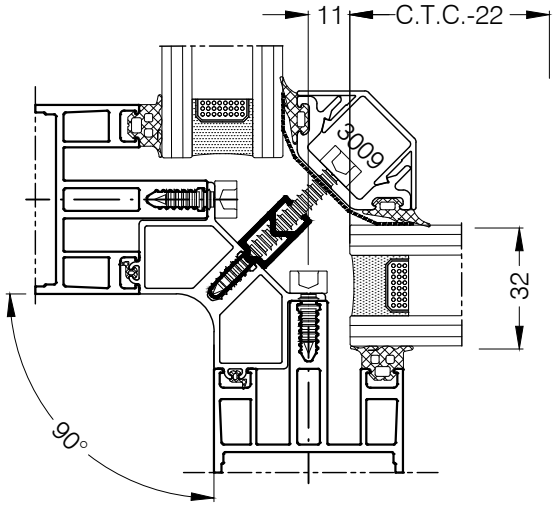

3.32

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts

3

Comar 6EFT

Capped curtain wall
Internal corner

3.33

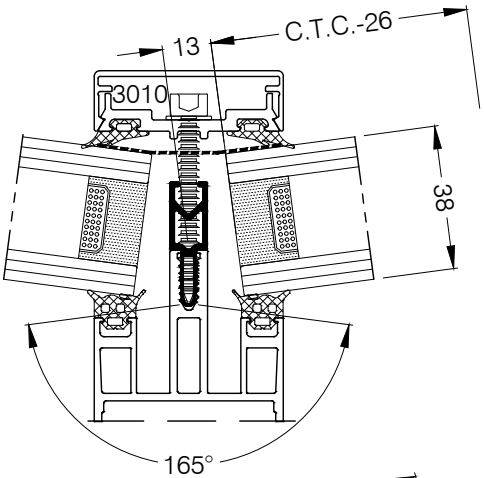

GLAZING POCKET 48	Glazing Thickness (mm)					
	28	30	32	34	36	38
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150+ 6001 Pressure Plate Gasket					
	1336-15° Glazing Adapter + 3021 Screw+2490 Gasket					
	1337-22.5° Glazing Adapter + 3021 Screw+2490 Gasket					
	1338-30° Glazing Adapter + 3021 Screw+2490 Gasket					
	2200-18mm Thermal Break					
	3010- 50mm Screw + 3091 Washer when Fit					
	As required for ventilation					

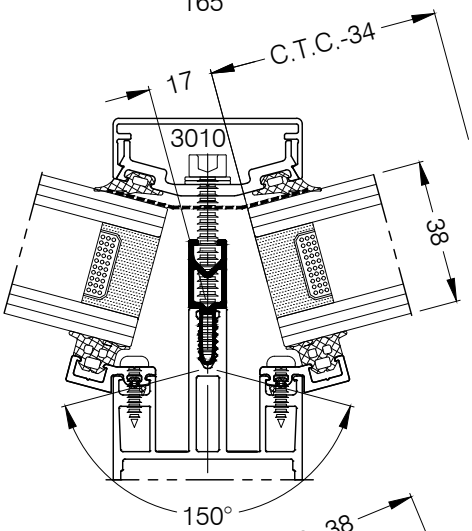

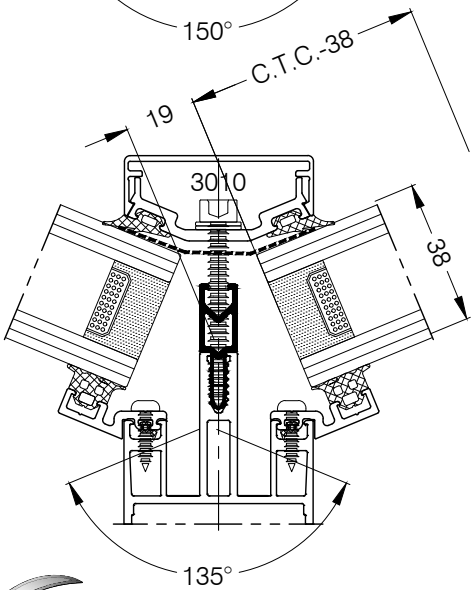

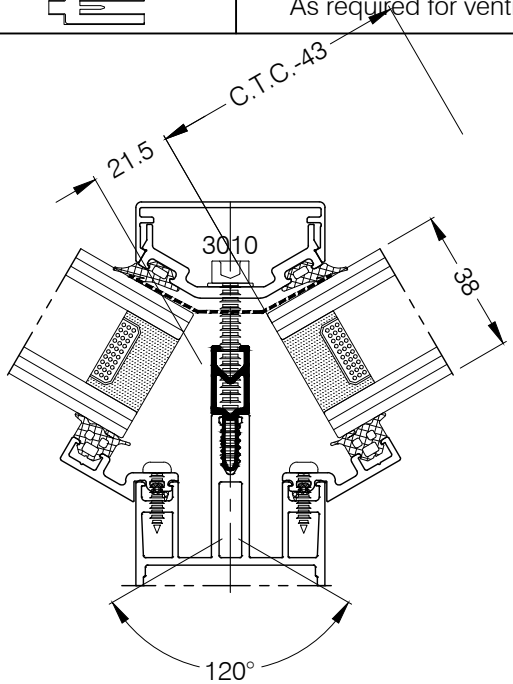

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped curtain wall Internal Corner

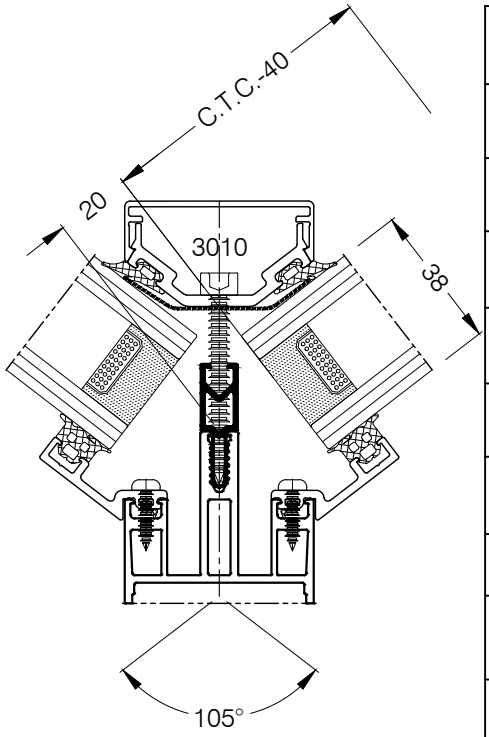

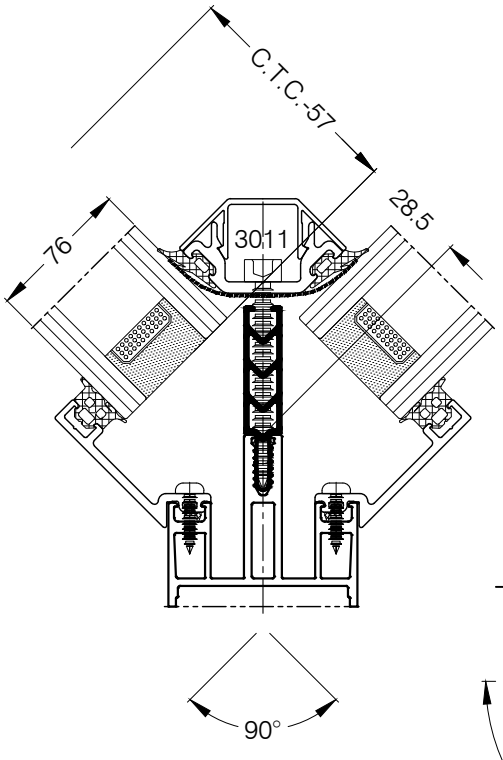

GLAZING POCKET 48	Glazing Thickness (mm)					
	28	30	32	34	36	38
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150+ 6001 Pressure Plate Gasket					
	1339-37.5° Glazing Adapter + 3021 Screw+2490 Gasket					
	1344-45° Glazing Adapter +3021 Screw+2490 Gasket					
	2200-18mm Thermal Break					
	2203-34mm Thermal Break					
	3010- 50mm Screw + 3091 Washer when Fit					
	3011- 55mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

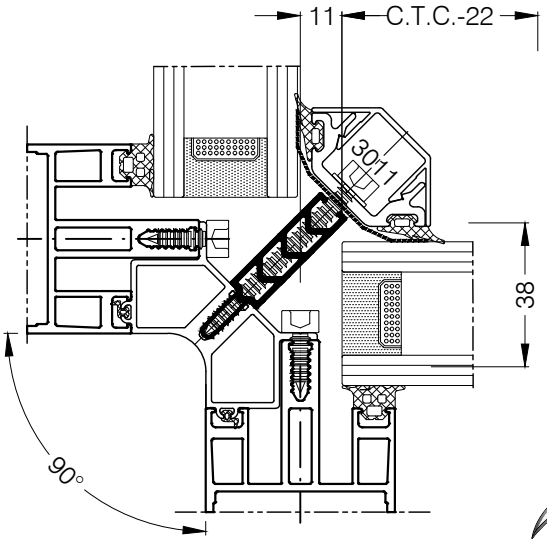

3.34

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT



3.35

Fabricators Guide

Capped curtain wall
Internal corner

GLAZING POCKET 54	Glazing Thickness (mm)					
	34	36	38	40	42	44
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150+ 6001 Pressure Plate Gasket					
	1336-15° Glazing Adapter + 3021 Screw+2490 Gasket					
	1337-22.5° Glazing Adapter + 3021 Screw+2490 Gasket					
	1338-30° Glazing Adapter + 3021 Screw+2490 Gasket					
	2203-34mm Thermal Break					
	3011- 55mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

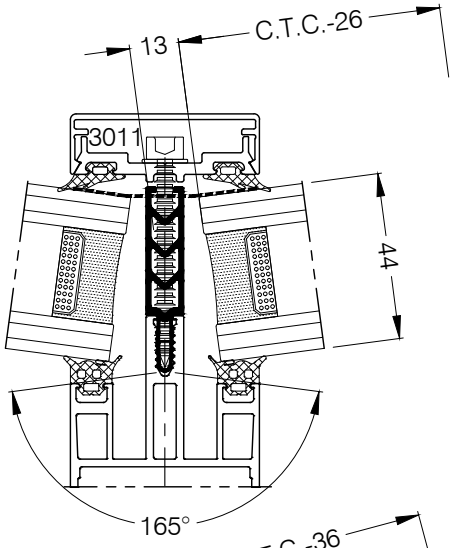

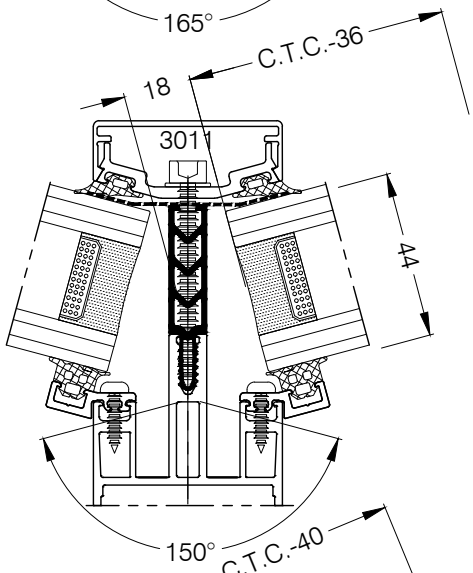

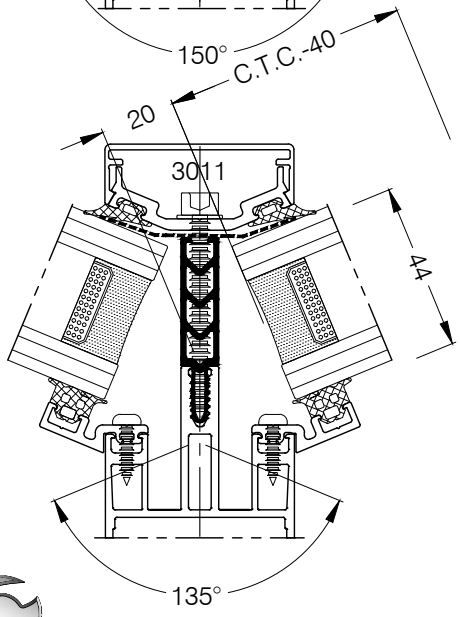

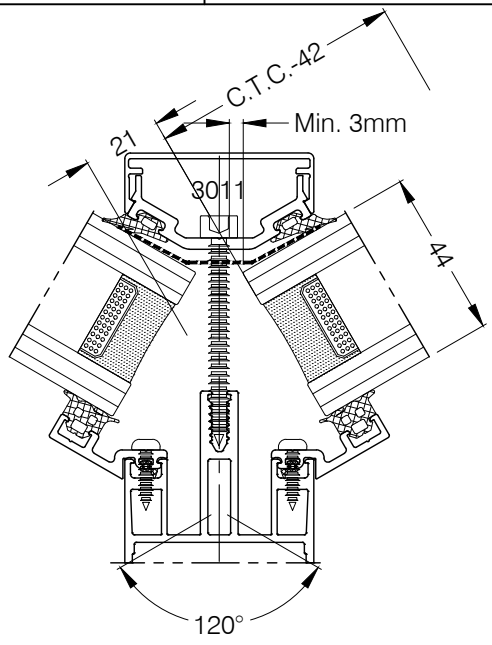

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped curtain wall
Internal corner

GLAZING POCKET 54	Glazing Thickness (mm)					
	34	36	38	40	42	44
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150+ 6001 Pressure Plate Gasket					
	1344-45° Glazing Adapter +3021 Screw+2490 Gasket					
	3013- 65mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

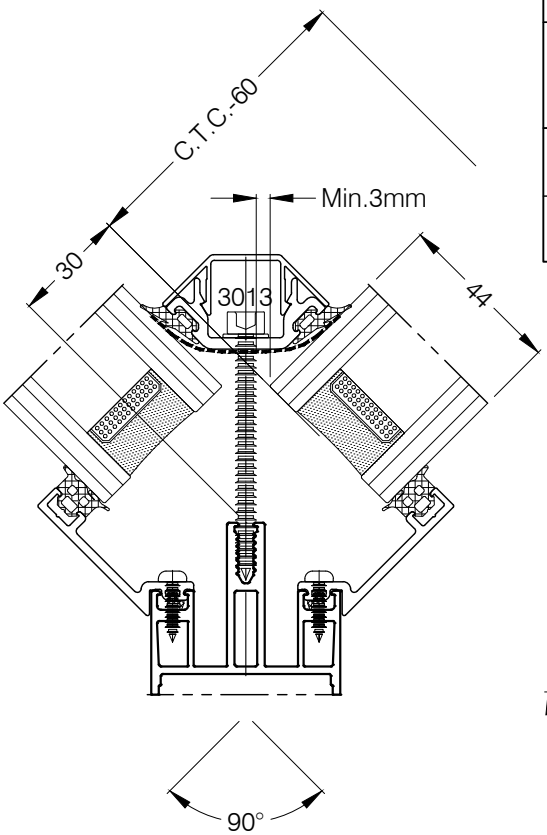

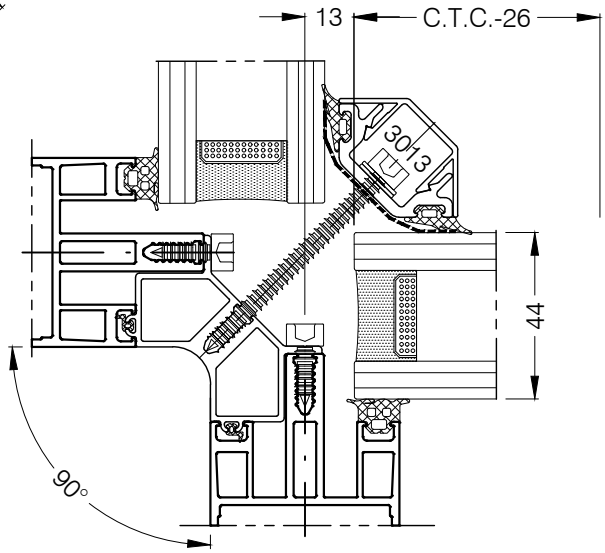

3.36

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts

3

Comar 6EFT



3.37

Fabricators Guide

Capped curtain wall
Internal corner

GLAZING POCKET 60	Glazing Thickness (mm)					
	40	42	44	46	48	50
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150+ 6001 Pressure Plate Gasket					
	1336-15° Glazing Adapter + 3021 Screw+2490 Gasket					
	1337-22.5° Glazing Adapter + 3021 Screw+2490 Gasket					
	2203-34mm Thermal Break					
	3012- 60mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

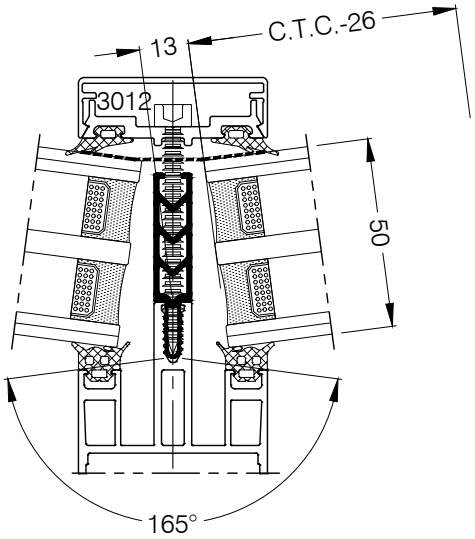

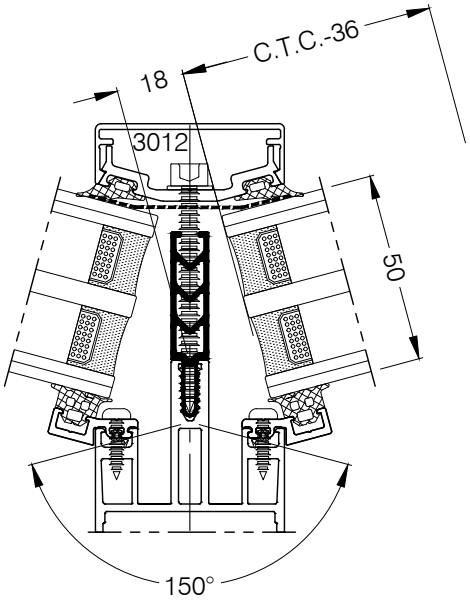

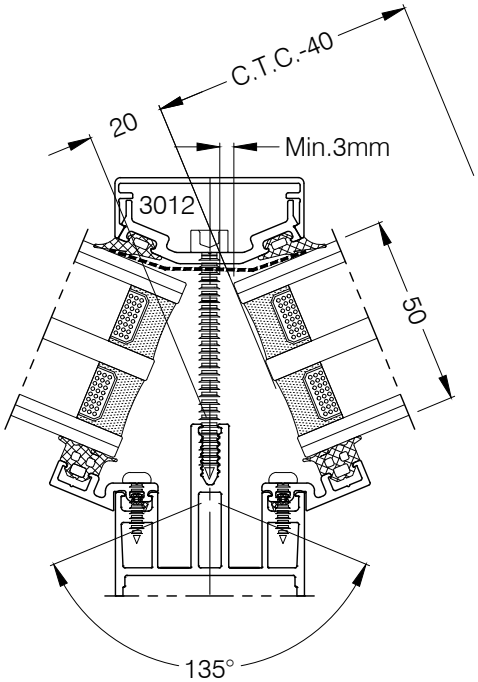

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped curtain wall
Internal corner

GLAZING POCKET 60	Glazing Thickness (mm)					
	46	48	50	52	54	56
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150+ 6001 Pressure Plate Gasket					
	1336-15° Glazing Adapter + 3021 Screw+2490 Gasket					
	2203-34mm Thermal Break					
	3013- 65mm Screw + 3091 Washer when Fit					
	3014- 70mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

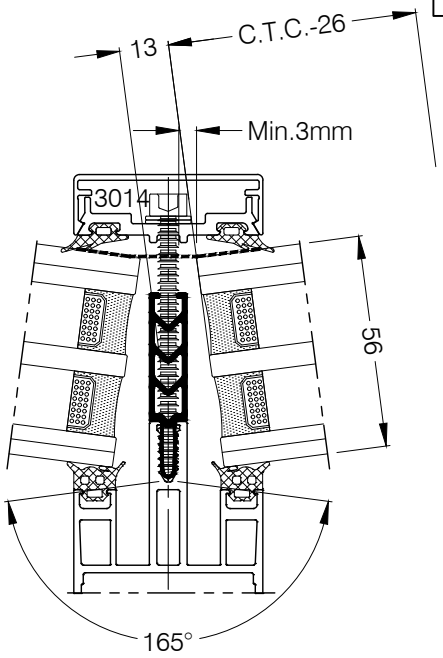

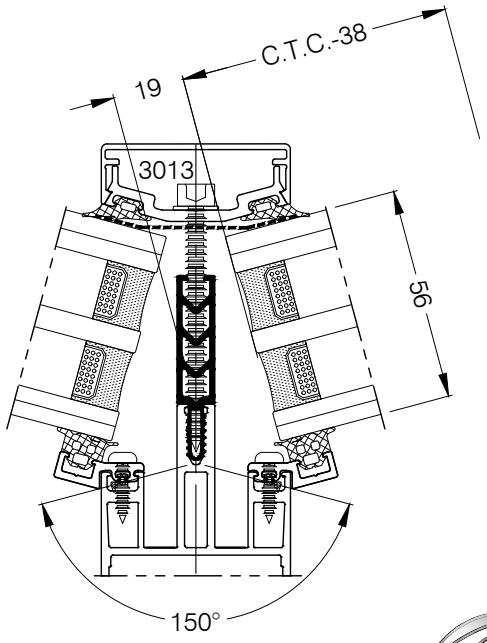

3.38

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts

3

Comar 6EFT



3.39

Capped curtain wall
Externall corner

GLAZING POCKET 24	Glazing Thickness (mm)					
	4	6	8	10	12	14
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
	1331-15° Glazing Adapter+2490 Gasket					
	1332-22.5° Glazing Adapter+2490 Gasket					
	1333-30° Glazing Adapter+2490 Gasket					
	1334-37.5° Glazing Adapter+2490 Gasket					
BUTYL	2150+ 6001or 6002 Pressure Plate Gasket					
	3005- 22mm Screw + 3091 Washer when Fit					
	3006- 25mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

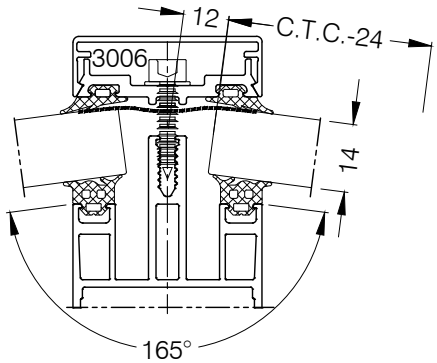

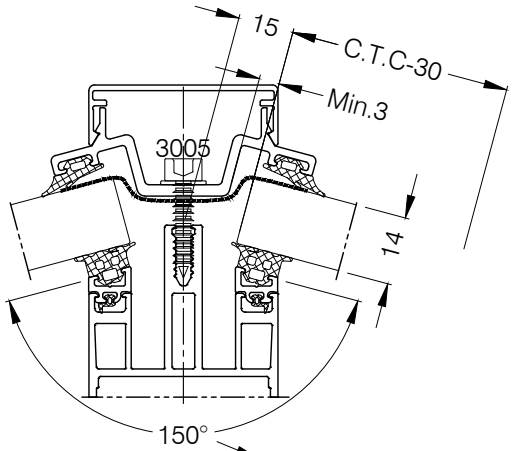

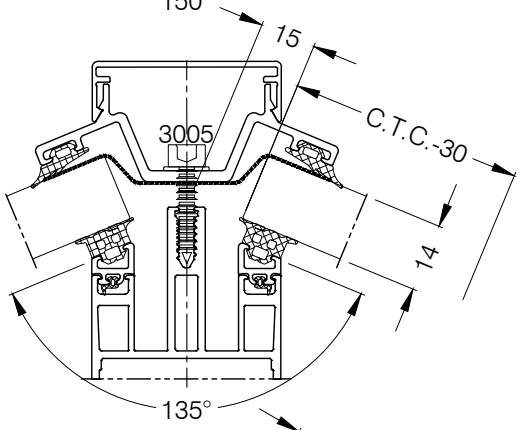

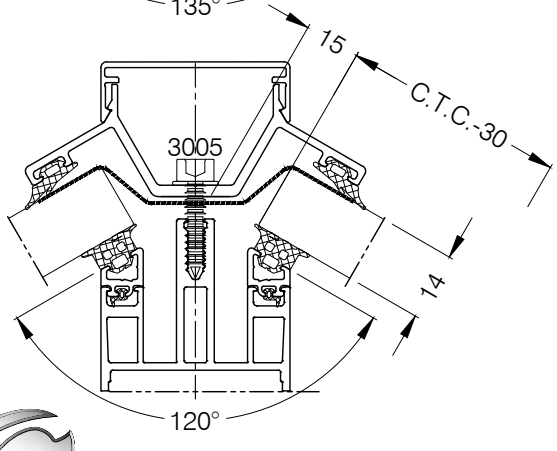

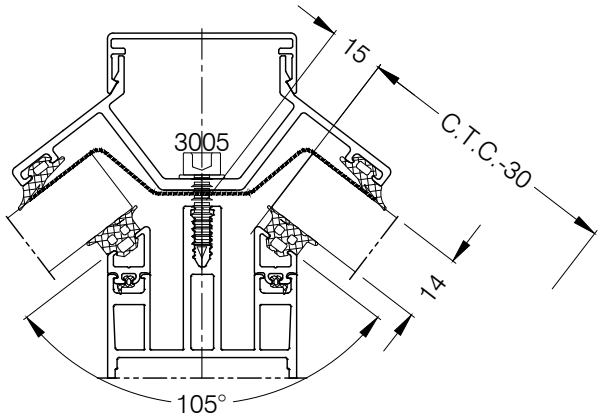

Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped curtain wall
External corner

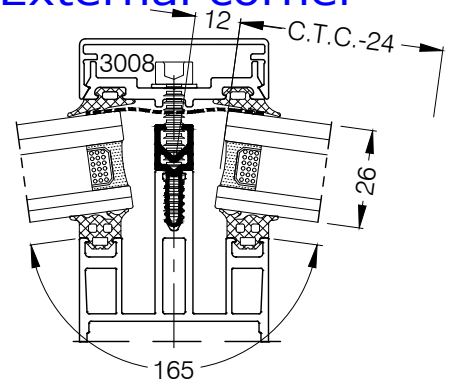

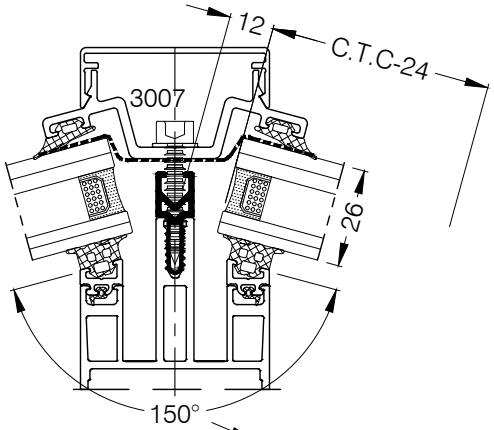

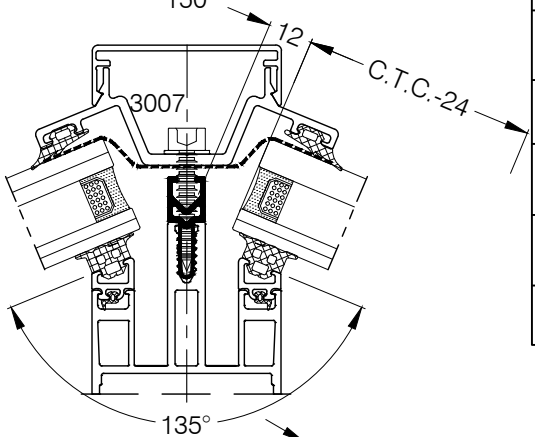

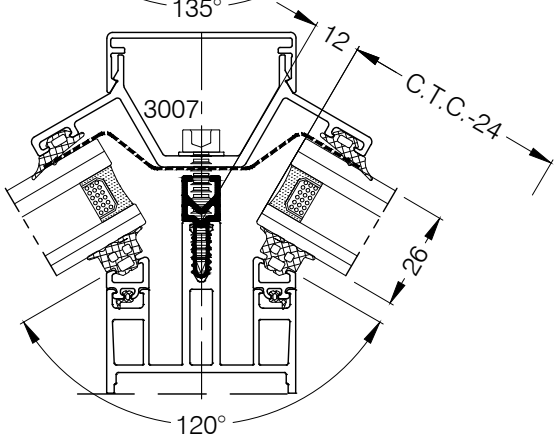

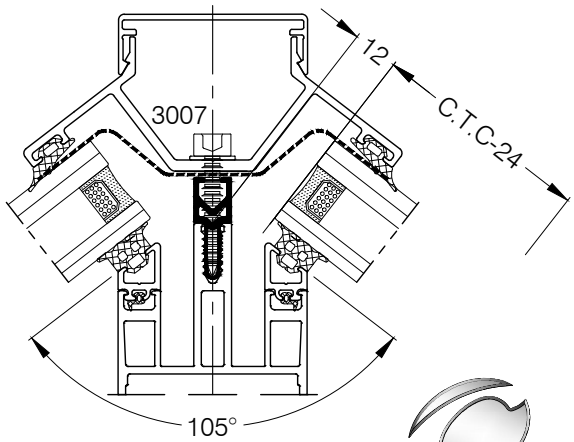

GLAZING POCKET 36	Glazing Thickness (mm)					
	16	18	20	22	24	26
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150+ 6001 or 6002 Pressure Plate Gasket					
	1331-15° Glazing Adapter+2490 Gasket					
	1332-22.5° Glazing Adapter+2490 Gasket					
	1333-30° Glazing Adapter+2490 Gasket					
	1334-37.5° Glazing Adapter+2490 Gasket					
	2197-12mm Thermal Break					
	3007- 32mm Screw + 3091 Washer when Fit					
	3008- 38mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

3.40

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts

3

Comar 6EFT

Capped curtain wall
External corner



3.41

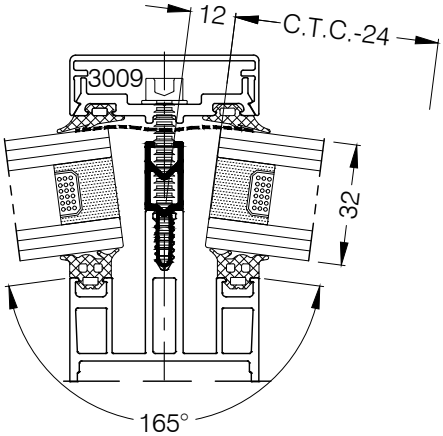

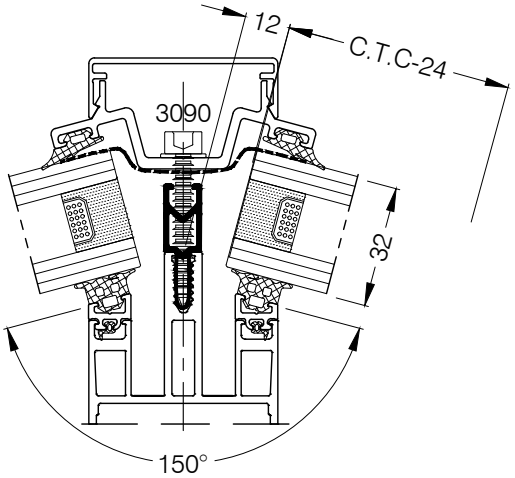

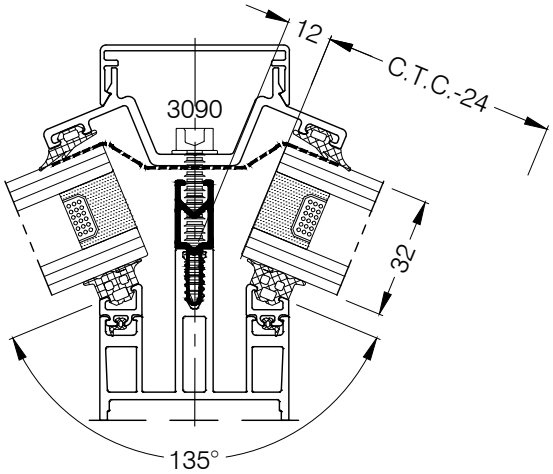

GLAZING POCKET 42	Glazing Thickness (mm)					
	22	24	26	28	30	32
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150 + 6001or 6002 Pressure Plate Gasket					
	1331-15° Glazing Adapter+2490 Gasket					
	1332-22.5° Glazing Adapter+2490 Gasket					
	2200-18mm Thermal Break					
	3090- 42mm Screw + 3091 Washer when Fit					
	3009- 45mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Fabricators Guide

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Internal corner
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped curtain wall
External corner

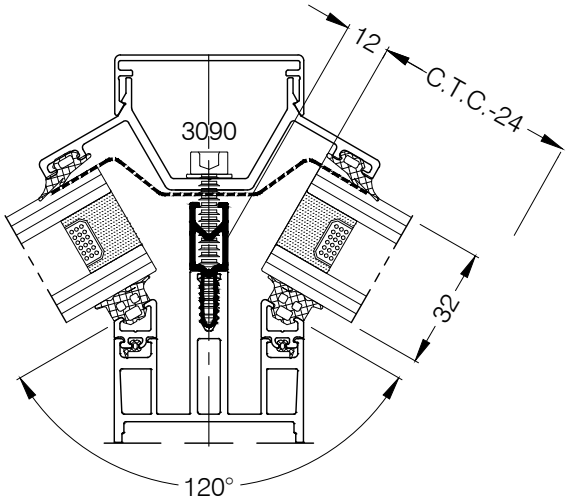

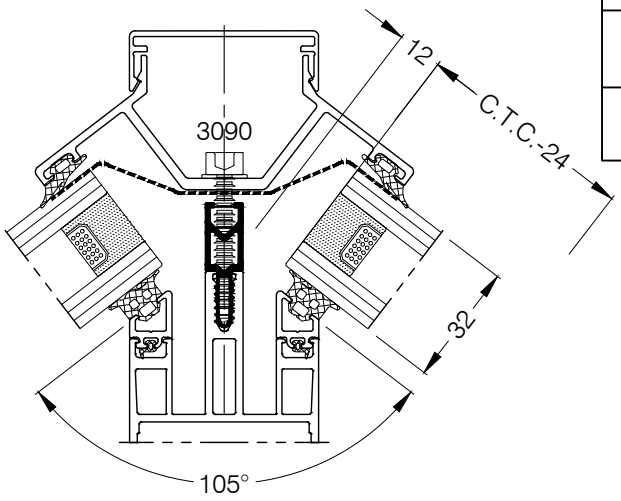

GLAZING POCKET 42	Glazing Thickness (mm)					
	22	24	26	28	30	32
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150 + 6002 Pressure Plate Gasket					
	1333-30° Glazing Adapter+2490 Gasket					
	1334-37.5° Glazing Adapter+2490 Gasket					
	2200-18mm Thermal Break					
	3090- 42mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

3.42

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts

3

Comar 6EFT



3.43

Capped curtain wall
External corner

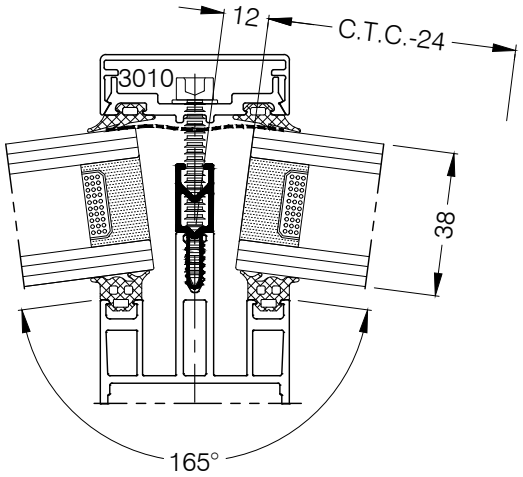

GLAZING POCKET 48	Glazing Thickness (mm)					
	28	30	32	34	36	38
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150 + 6001 or 6002 Pressure Plate Gasket					
	1331-15° Glazing Adapter+2490 Gasket					
	1332-22.5° Glazing Adapter+2490 Gasket					
	2200-18mm Thermal Break					
	3009- 45mm Screw + 3091 Washer when Fit					
	3010- 50mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Fabricators Guide

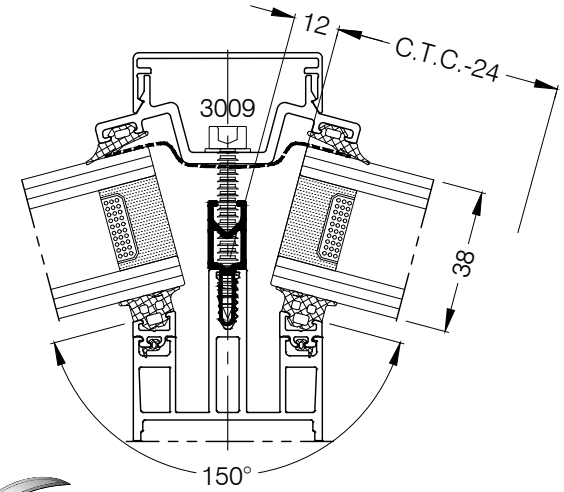

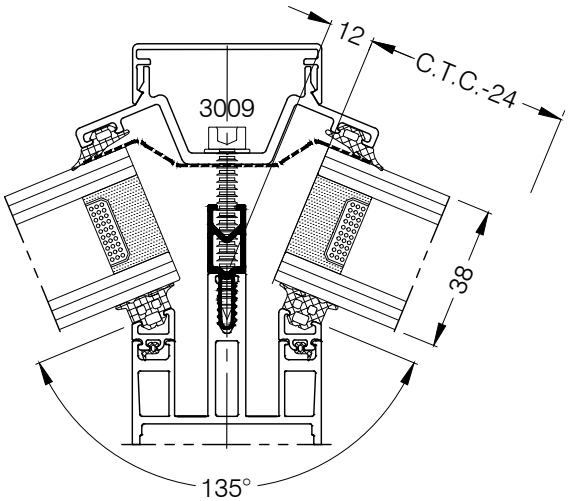

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped curtain wall
External corner

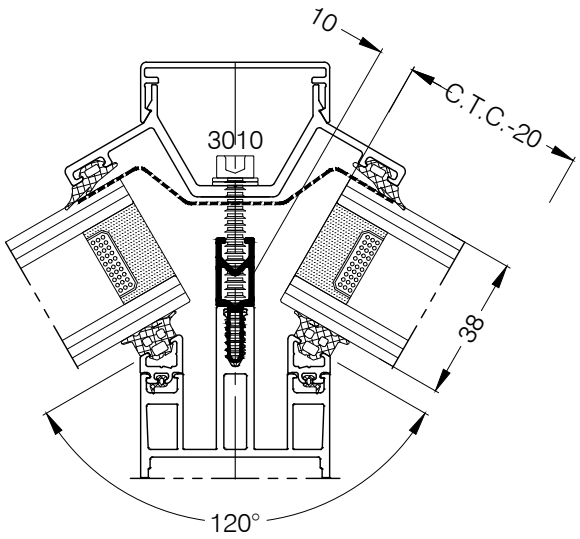

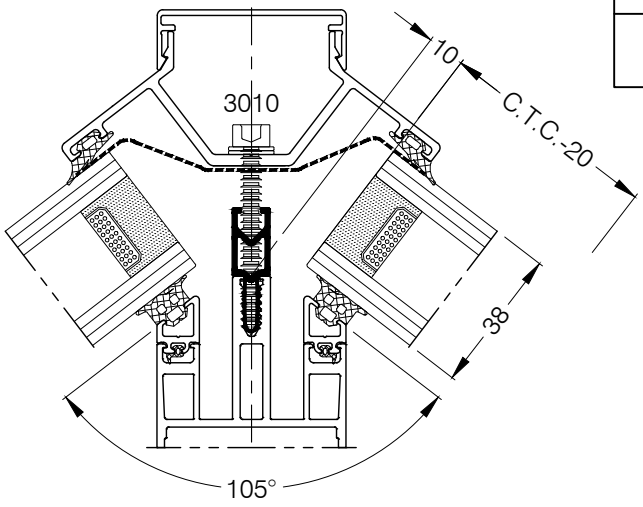

GLAZING POCKET 48	Glazing Thickness (mm)					
	28	30	32	34	36	38
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150 + 6002 Pressure Plate Gasket					
	1333-30° Glazing Adapter+2490 Gasket					
	1334-37.5° Glazing Adapter+2490 Gasket					
	2200-18mm Thermal Break					
	3010- 50mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

3.44

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT



3.45

Capped curtain wall
External corner

GLAZING POCKET 54	Glazing Thickness (mm)					
	34	36	38	40	42	44
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150 + 6001 or 6002 Pressure Plate Gasket					
	1331-15° Glazing Adapter+2490 Gasket					
	1332-22.5° Glazing Adapter+2490 Gasket					
	2203-34mm Thermal Break					
	3011- 55mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

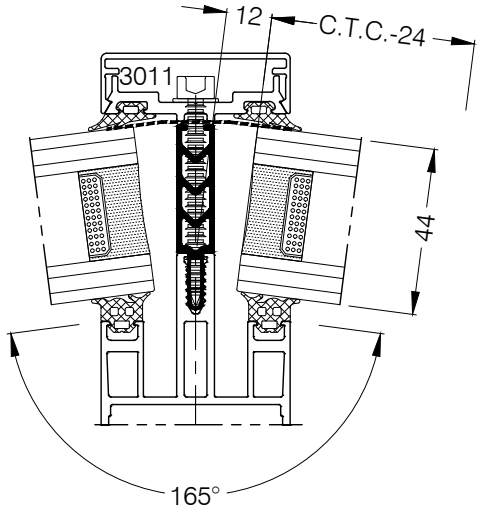

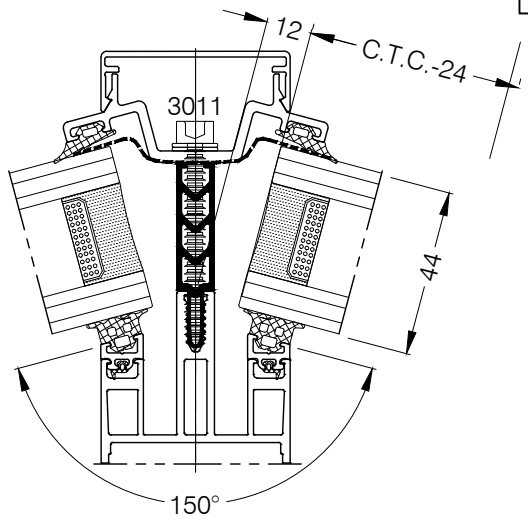

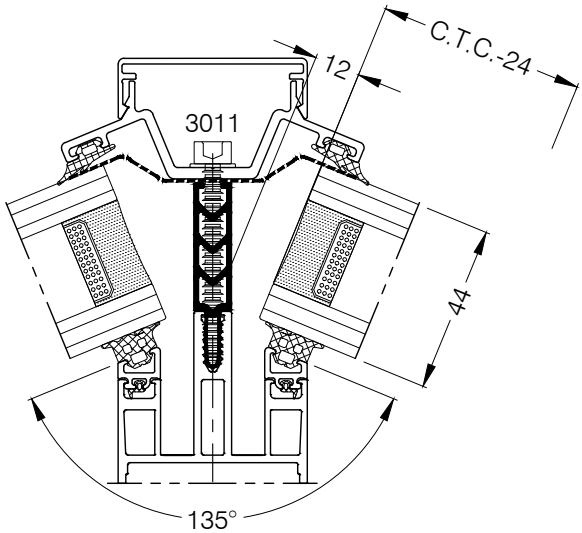

Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped curtain wall External Corner

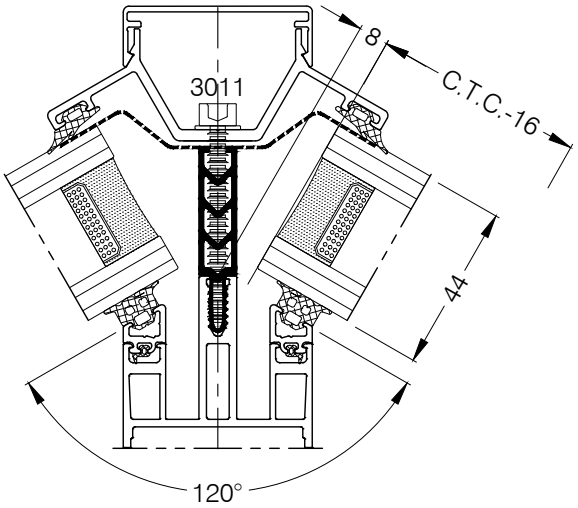

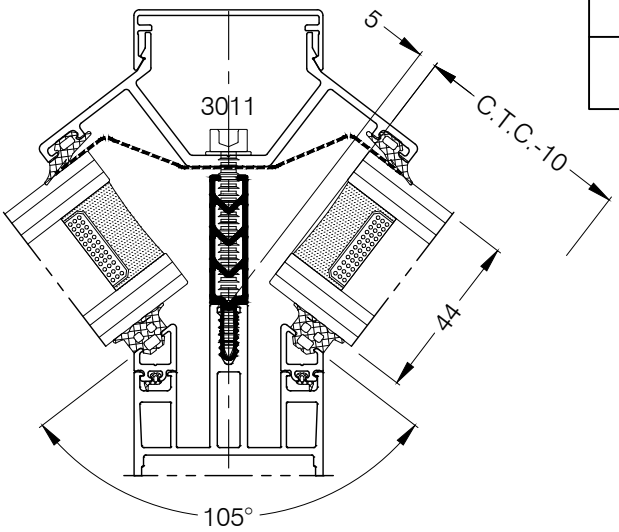

GLAZING POCKET 54	Glazing Thickness (mm)					
	34	36	38	40	42	44
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150 + 6002 Pressure Plate Gasket					
	1333-30° Glazing Adapter+2490 Gasket					
	1334-37.5° Glazing Adapter+2490 Gasket					
	22034-34mm Thermal Break					
	3011- 55mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

3.46

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts

3

Comar 6EFT

Capped c.w.external corner



3.47

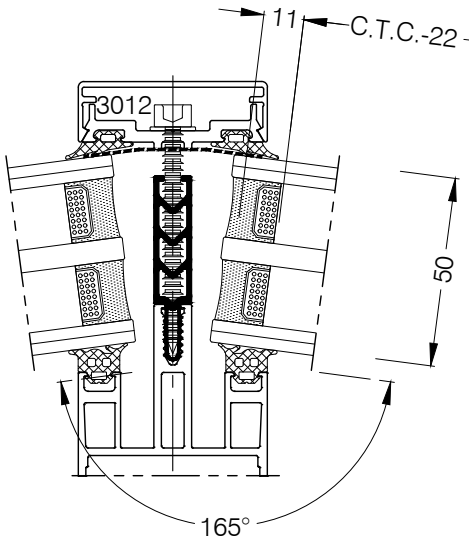

GLAZING POCKET 60	Glazing Thickness (mm)					
	40	42	44	46	48	50
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150 + 6001 or 6002 Pressure Plate Gasket					
	1331-15° Glazing Adapter+2490 Gasket					
	1332-22.5° Glazing Adapter+2490 Gasket					
	22034-34mm Thermal Break					
	3012- 60mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Fabricators Guide

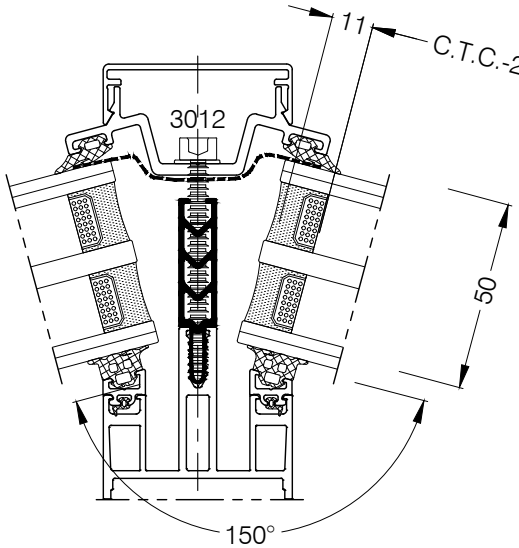

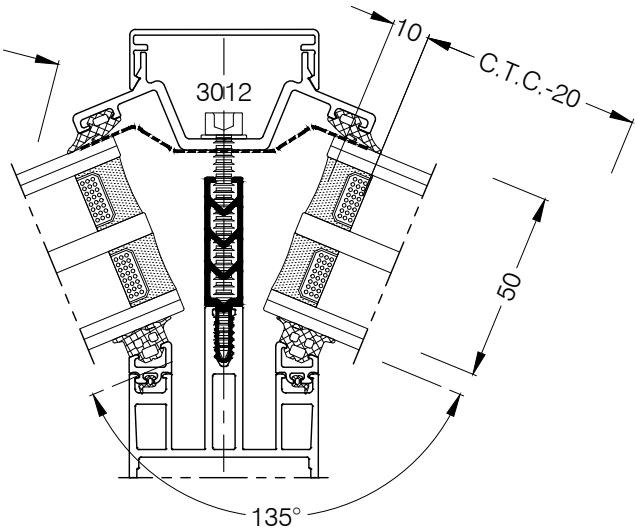

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Capped c.w External Corner

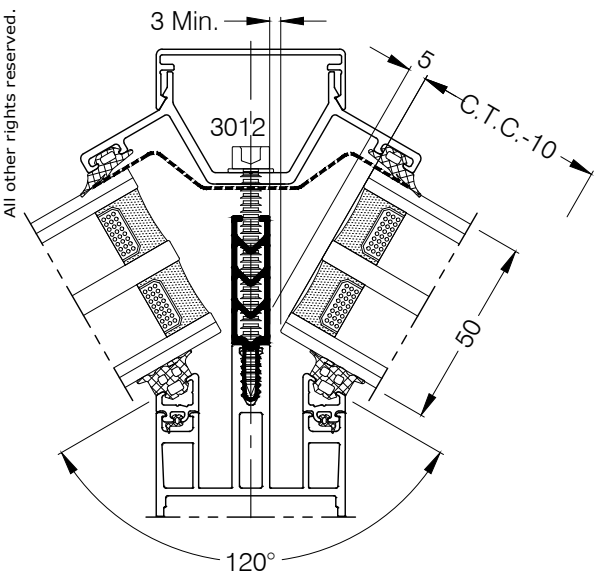

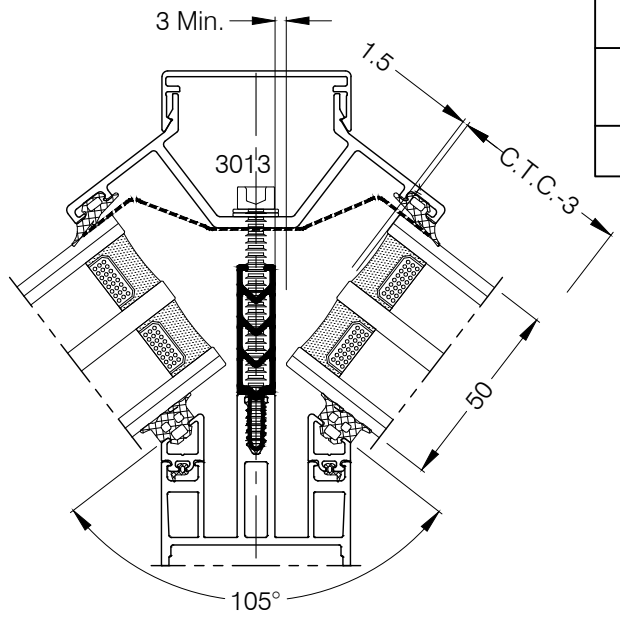

GLAZING POCKET 60	Glazing Thickness (mm)					
	40	42	44	46	48	50
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150 + 6002 Pressure Plate Gasket					
	1333-30° Glazing Adapter+2490 Gasket					
	1334-37.5° Glazing Adapter+2490 Gasket					
	2203-34mm Thermal Break					
	3012- 60mm Screw + 3091 Washer when Fit					
	3013- 65mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

3.48

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT



3.49

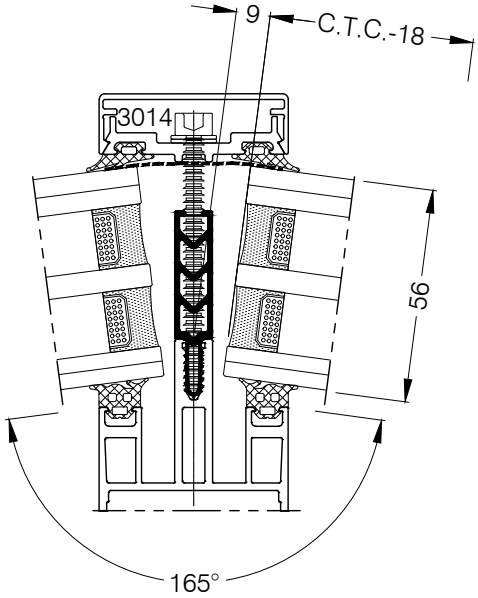

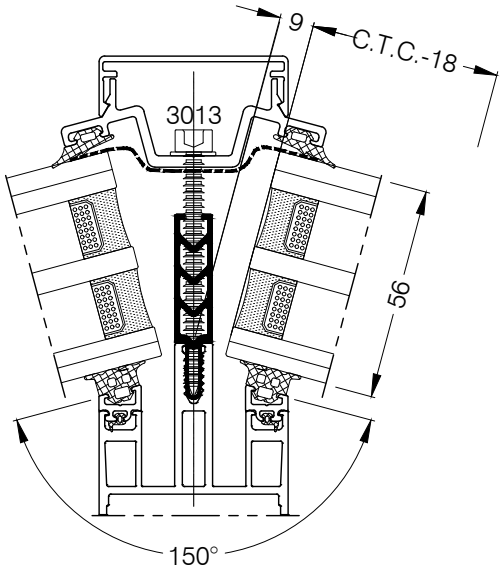

Capped c.w. External Corner

GLAZING POCKET 66	Glazing Thickness (mm)					
	46	48	50	52	54	56
2102 6mm 2101						X
2104 8mm 2103					X	
2106 10mm 2105				X		
2108 12mm 2107			X			
2110 14mm 2109		X				
2112 16mm 2111	X					
BUTYL	2150 + 6001 or 6002 Pressure Plate Gasket					
	1331-15° Glazing Adapter+2490 Gasket					
	1332-22.5° Glazing Adapter+2490 Gasket					
	2203-34mm Thermal Break					
	3013- 65mm Screw + 3091 Washer when Fit					
	3014- 70mm Screw + 3091 Washer when Fit					
	As required for ventilation					

TRANSOM ITEMS SEE GLAZING CHART FOR CAPPED C.W.

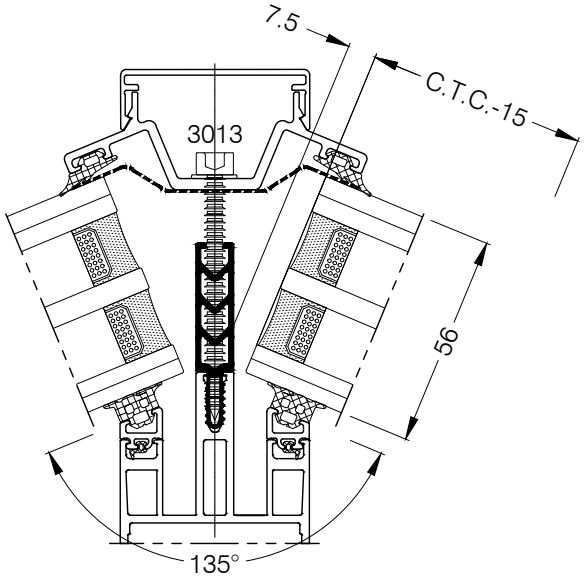

Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT,
Euro Facade Systems Ltd, whose prior written consent is required
for its use, reproduction or for publication to any third party.
All other rights reserved. Subject to modifications.

Future Additions



3.50

FUTURE ADDITION

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date :10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts

3

Comar 6EFT

4 sided SG & 2 sided SGH



3.51

Inward Angle 7.5°		Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	34	36	38	A (mm)
2102	6mm 2101	12			X						X	13.2
		10			X					X		12.9
		8			X				X			12.3
		6			X			X				12.4
2104	8mm 2103	12		X						X		13.2
		10		X					X			12.9
		8		X				X				12.7
		6		X			X					12.4
2106	10mm 2105	12	X						X			13.2
		10	X					X				12.9
		8	X				X					12.5
		6	X			X						12.4

TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH

2176- 4mm Joint Gasket		X	X	
2170- 2mm Joint Gasket	X			X
2166 6mm- Gasket				X
2197- 12mm Thermal Break				
2403- 12mm Double Glazing Clamp				
3029-23mm Screw				
As required for ventilation				

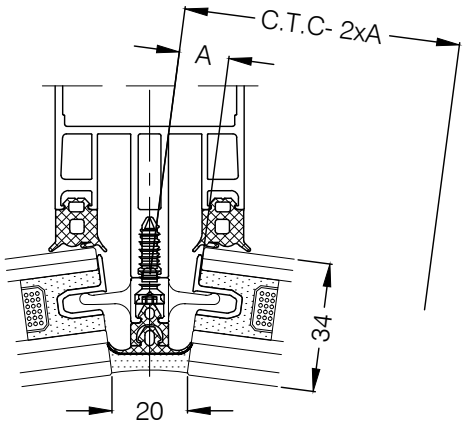

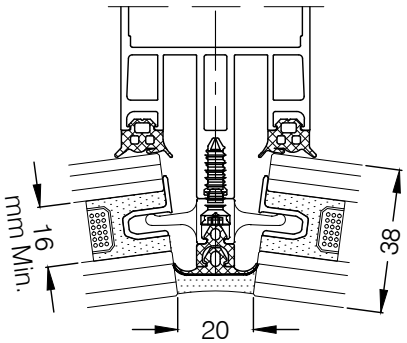



Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

4 sided SG & 2 sided SGH



3.52

Inward Angle 7.5°		Inner Glass Pane (mm)			Glazing Thickness (mm)						A (mm)	TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH
		6-7	8-9	10-11	40	42	44	46	48	50		
2102	6mm 2101			X			X				14.1	
										X	14.6	
2104	8mm 2103		X			X					14.1	
									X		14.6	
2106	10mm 2105	X			X						14.1	
								X			14.6	

	2176 - 4mm Joint Gasket
	2178 - 8mm Joint Gasket
	2166 - 6mm- Gasket
	2100 - 18mm Thermal Break
	2431 - 12mm Double Glazing Clamp
	3029 - 23mm Screw
	As required for ventilation

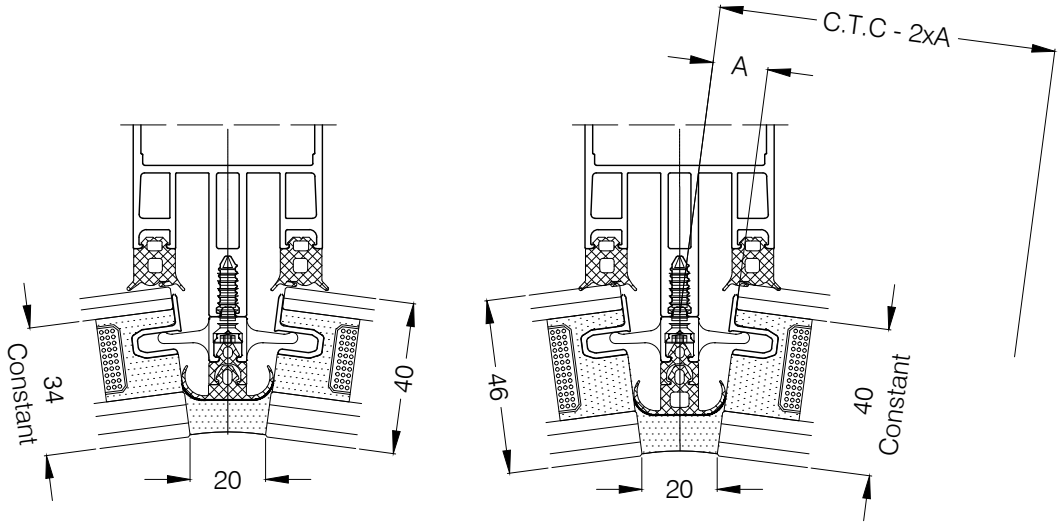

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts 3

Comar 6EFT

4 sided SG & 2 sided SGH



3.53

Fabricators Guide

Inward Angle 15°		Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	34	36	38	A (mm)
2102	6mm 2101	12			X						X	16.9
		10			X					X		15.7
		8			X				X			15.2
		6			X			X				14.6
2104	8mm 2103	12		X						X		16.3
		10		X					X			15.7
		8		X				X				15.2
		6		X			X					17.7
2106	10mm 2105	12	X						X			16.3
		10	X					X				15.7
		8	X				X					15.1
		6	X			X						14.6

TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH

	12	10	8	6
2176- 4mm Joint Gasket		X	X	X
2172- 2mm Joint Gasket	X			

2442- 12mm Double Glazing Clamp

3029-23mm Screw

2197- 12mm Thermal Break

As required for ventilation

1339- 15° Glazing Adapter +3021 Screw + 2490 Gasket

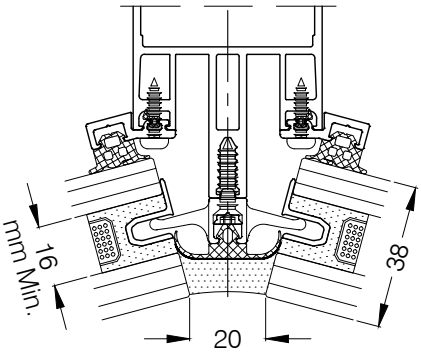

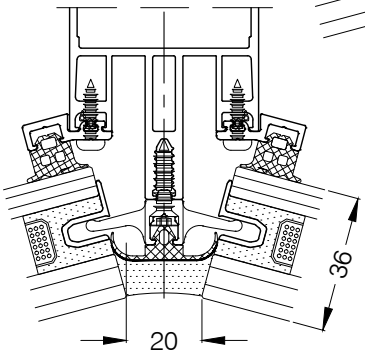

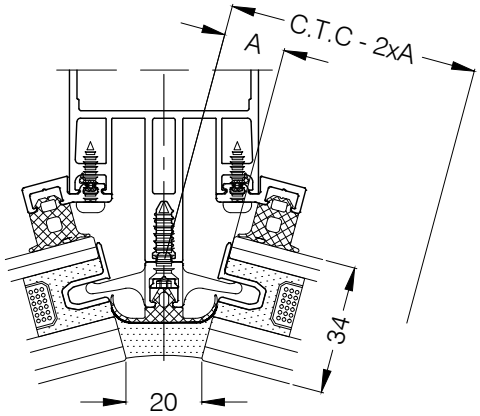

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Comar 6EFT

4 sided SG & 2 sided SGH



3.54

Inward Angle 15°		Inner Glass Pane (mm)			Glazing Thickness (mm)			TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH
		6-7	8-9	10-11	40	42	44	
2102	6mm 2101			X			X	
2104	8mm 2103		X			X		
2106	10mm 2105	X			X			

	2176- 4mm Joint Gasket
	2166 6mm- Gasket
	2100- 18mm Thermal Break
	1339- 15° Glazing Adapter +3021 Screw + 2490 Gasket
	2442- 12mm Double Glazing Clamp
	3029-23mm Screw
	As required for ventilation

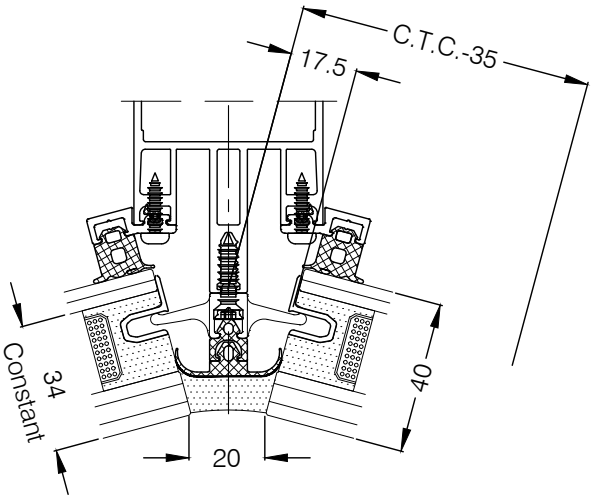

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts

3

Comar 6EFT

4 sided SG & 2 sided SGH



3.55

Fabricators Guide

Inward Angle 22.5°		Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	34	36	38	A (mm)
2102	6mm 2101	12			X						X	18.5
		10			X					X		18.0
		8			X				X			16.8
		6			X			X				16.4
2104	8mm 2103	12		X						X		18.6
		10		X					X			18.0
		8		X				X				17.4
		6		X			X					16.4
2106	10mm 2105	12	X						X			18.8
		10	X					X				18.1
		8	X				X					17.2
		6	X			X						16.4

TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH

	Outer Glass Pane (mm) 6	8	10	12
2176- 4mm Joint Gasket			X	X
2172- 2mm Joint Gasket	X	X		

2443- 12mm Double Glazing Clamp	1337- 22.5° Glazing Adapter +3021 Screw + 2490 Gasket
3029-23mm Screw	
2197- 12mm Thermal Break	
As required for ventilation	

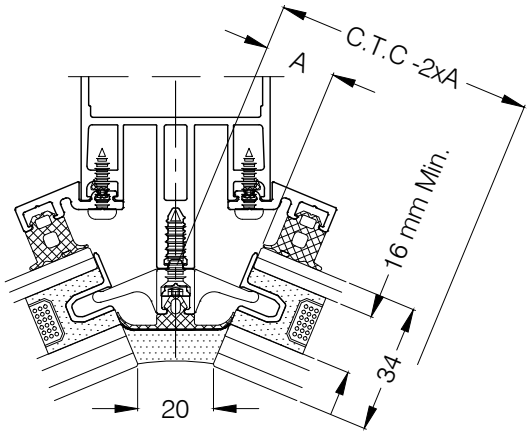

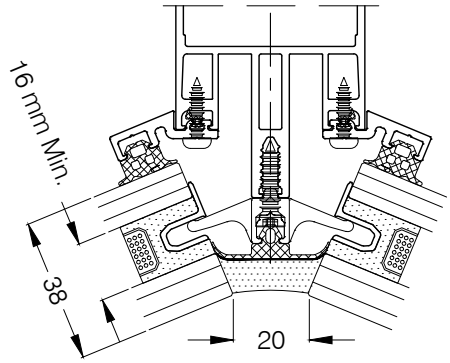

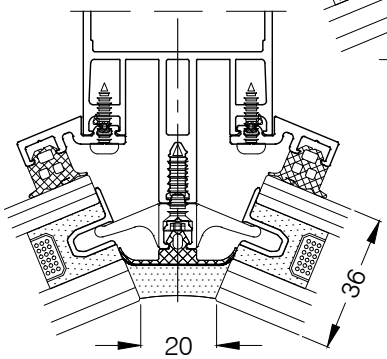

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Comar 6EFT

4 sided SG & 2 sided SGH



3.56

Inward Angle 30°	Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	34	36	38	A (mm)
2102 6mm 2101	12			X						X	21.5
	10			X					X		20.4
	8			X				X			19.3
	6			X			X				18.1
2104 8mm 2103	12		X						X		21.6
	10		X					X			20.4
	8		X				X				19.2
	6		X			X					18.1
2106 10mm 2105	12	X						X			21.6
	10	X					X				20.4
	8	X				X					19.3
	6	X			X						18.1

TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH

2178- 8mm Joint Gasket				X
2176- 4mm Joint Gasket		X	X	
2172- 2mm Joint Gasket	X			

Clamp Inner Angle 30°

1338- 30° Glazing Adapter +3021 Screw + 2490 Gasket

3004-19mm Screw 3091-Washer

2197- 12mm Thermal Break

As required for ventilation

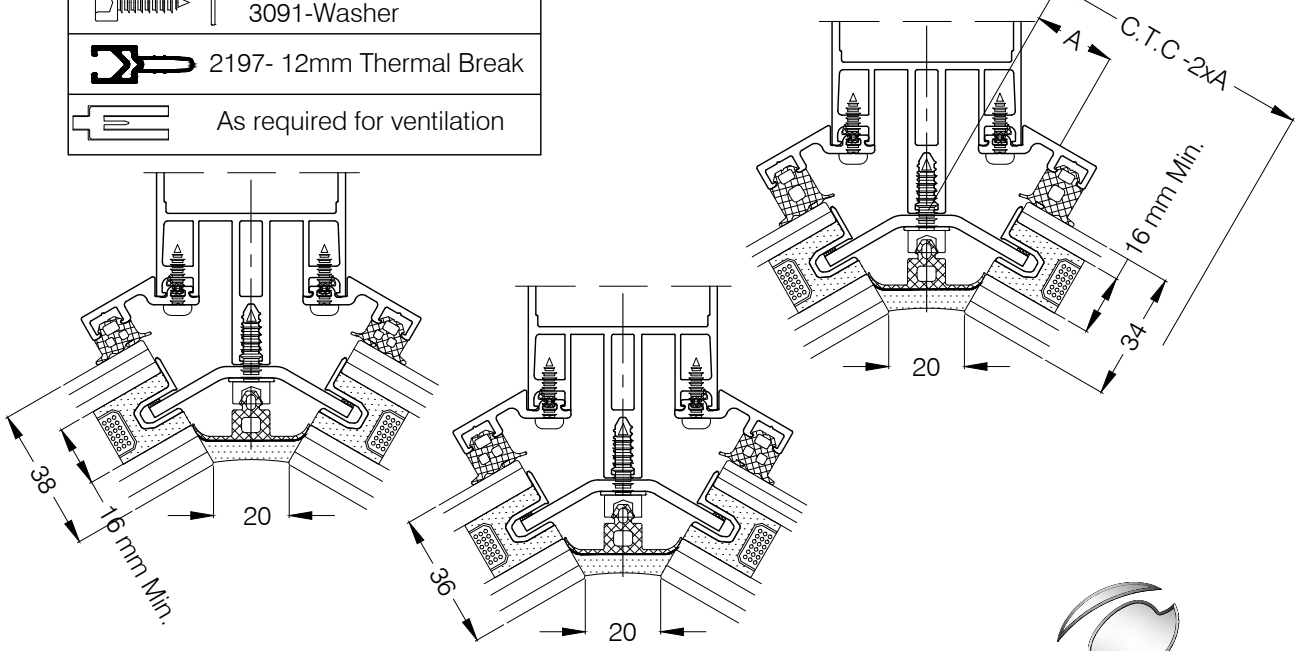

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Fabricators Guide

Glazing charts 3

Comar 6EFT

4 sided SG & 2 sided SGH



3.57

Fabricators Guide

Inward Angle 37.5°	Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	34	36	A (mm)
2102 6mm 2101	10			X					X	23
	8			X				X		22
	6			X			X			20
2104 8mm 2103	10		X					X		23
	8		X				X			22
	6		X			X				20
2106 10mm 2105	10	X					X			23
	8	X				X				22
	6	X			X					20

TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH

	10	8	6
2172- 2mm Joint Gasket	X	X	X
2166- 6mm Gasket 2167- 8mm Gasket	X	X	
2200- 18mm Thermal Break			X

Clamp Inner Angle 37.5°

1339- 37.5° Glazing Adapter +3021 Screw + 2490 Gasket

3004-19mm Screw 3091-Washer

As required for ventilation

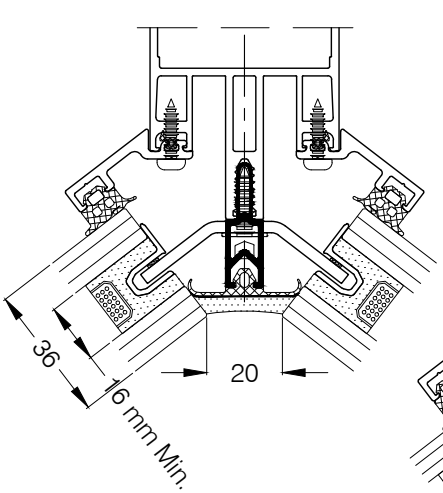

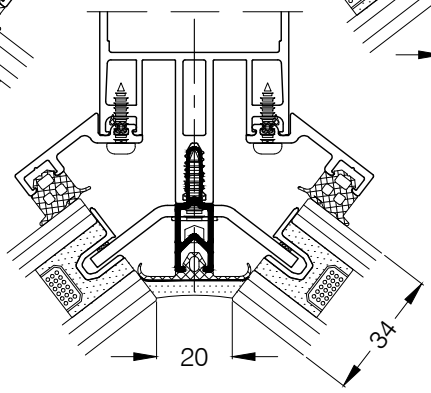

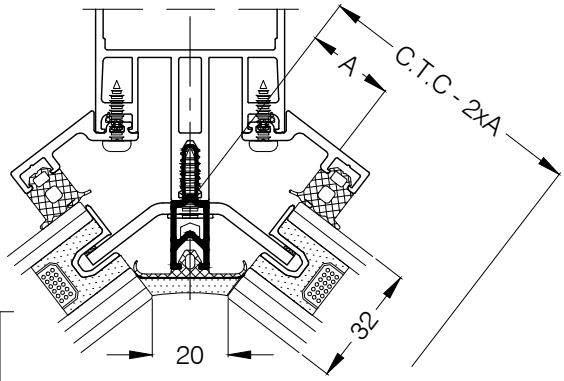

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

4 sided SG & 2 sided SGH

Comar 6EFT



3.58

Inward Angle 45°		Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	34	36	38	A (mm)
2102	6mm 2101	12			X						X	13
		10			X					X		11
		8			X				X			11**
		6			X			X				11*
2104	8mm 2103	12		X						X		13
		10		X					X			11
		8		X				X				11**
		6		X			X					11*
2106	10mm 2105	12	X						X			13
		10	X					X				11
		8	X				X					11**
		6	X			X						11*

TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH

*- Seal Gap 25mm
**- Seal Gap 23mm

Gasket 2171	X	X	X	
2155 22mm - Gasket				X
2172 2mm - Gasket				X
2025 Drainage Diverter	X	X	---	---
2403- 12mm Double Glazing Clamp				
3029-23mm Screw				

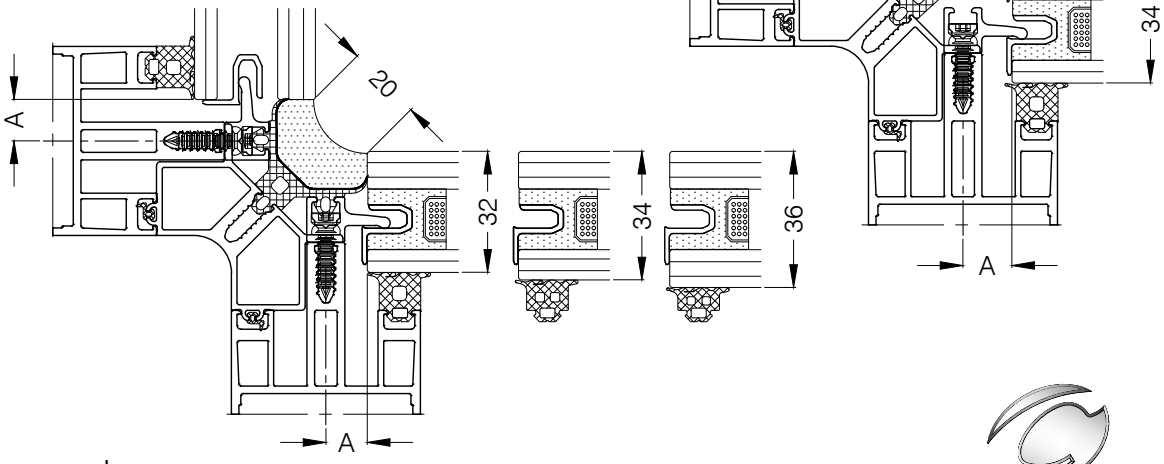

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Fabricators Guide

Glazing charts 3

Comar 6EFT

4 sided SG & 2 sided SGH



3.59

Fabricators Guide

Outward Angle 7.5°	Inner Glass Pane (mm)			Glazing Thickness (mm)									A (mm)
	6-7	8-9	10-11	40	42	44	46	48	50	52	54	56	
2102 6mm 2101			X									X	7.0
									X				6.1
						X							5.4
2104 8mm 2103		X									X		7.0
								X					6.1
					X								5.4
2106 10mm 2105	X									X			7.0
							X						6.1
				X									5.4
2170- 2mm Joint Gasket				X	X	X				X	X	X	
2182- 2mm Joint Gasket							X	X	X				
2166 6mm- Gasket				X	X	X	X	X	X				
2166- 6mm Gasket x 2							X	X	X				
2155 22mm- Gasket										X	X	X	
2100- 18mm Thermal Break				X	X	X	X	X					
2103- 34mm Thermal Break									X	X	X	X	
2026- 64mm Drainage Diverter				X	X	X							
2027- 72mm Drainage Diverter							X	X	X	X	X	X	
2431- 12mm Double Glazing Clamp													
3029-23mm Screw													

TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.



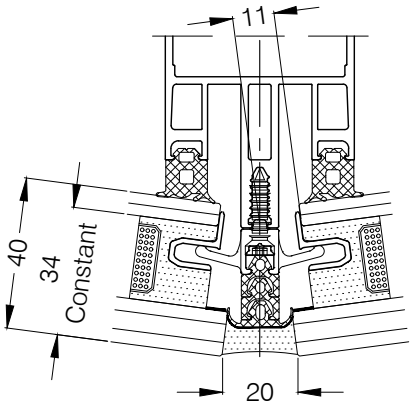

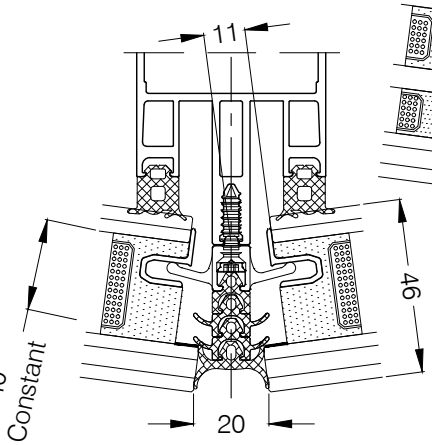

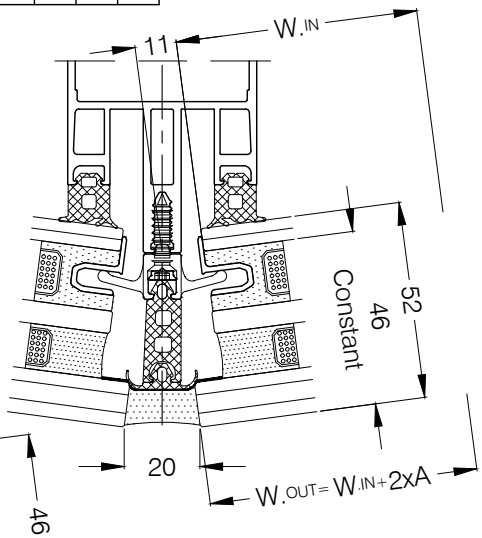

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Comar 6EFT

4 sided SG & 2 sided SGH



3.60

Outward Angle 7.5°	Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	34	36	38	A (mm)
2102 6mm 2101	12			X						X	4.6
	10			X					X		4.5
	8			X				X			4.3
	6			X			X				4.2
2104 8mm 2103	12		X						X		4.5
	10		X					X			4.3
	8		X				X				4.2
	6		X			X					4.0
2106 10mm 2105	12	X						X			4.3
	10	X					X				4.2
	8	X				X					4.0
	6	X			X						3.8

TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH

	12	10	8	6
2176- 4mm Joint Gasket			X	X
2170- 2mm Joint Gasket	X	X		
2166 6mm- Gasket	X	X		
2021- 50mm Drainage Diverter			X	X
2020- 56mm Drainage Diverter	X	X		

2431- 12mm Double Glazing Clamp

3029-23mm Screw

2197- 12mm Thermal Break



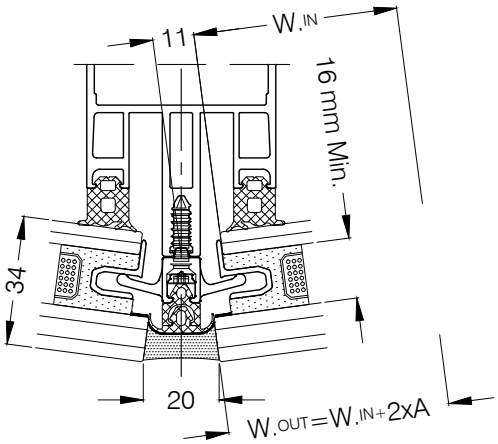

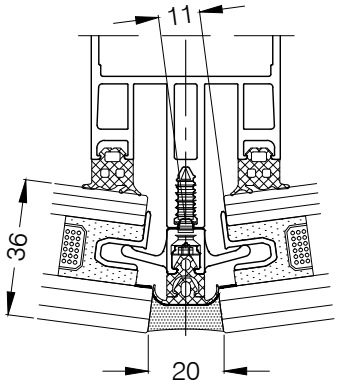

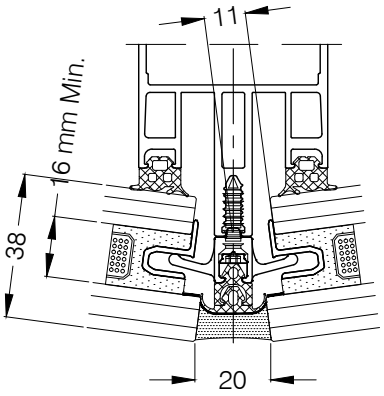

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Fabricators Guide

Glazing charts 3

Comar 6EFT

4 sided SG & 2 sided SGH



3.61

Outward Angle 15°	Inner Glass Pane (mm)			Glazing Thickness (mm)									A (mm)	TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH
	6-7	8-9	10-11	40	42	44	46	48	50	52	54	56		
2102 6mm 2101			X									X	15.3	
									X				13.3	
						X							11.8	
2104 8mm 2103		X									X		15.3	
								X					13.3	
					X								11.8	
2106 10mm 2105	X									X			15.3	
							X						13.3	
				X									11.8	
2170- 2mm Joint Gasket							X	X	X	X	X	X		
2182- 2mm Joint Gasket				X	X	X								
2167 8mm- Gasket x 2				X	X	X	X	X	X					
2166 6mm- Gasket										X	X	X		
2155 22mm- Gasket										X	X	X		
2432- 18mm Double Glazing Clamp				1331- 15° Glazing Adapter + 2490 Gasket										
3030-23mm Screw														
2103- 34mm Thermal Break														
NO Drainage Diverter														



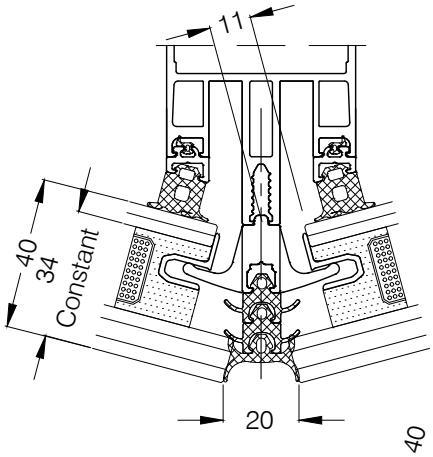

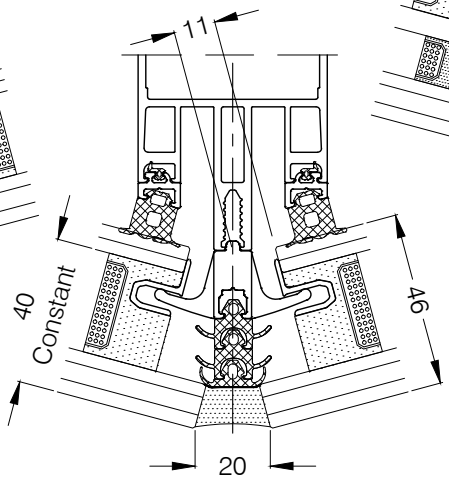

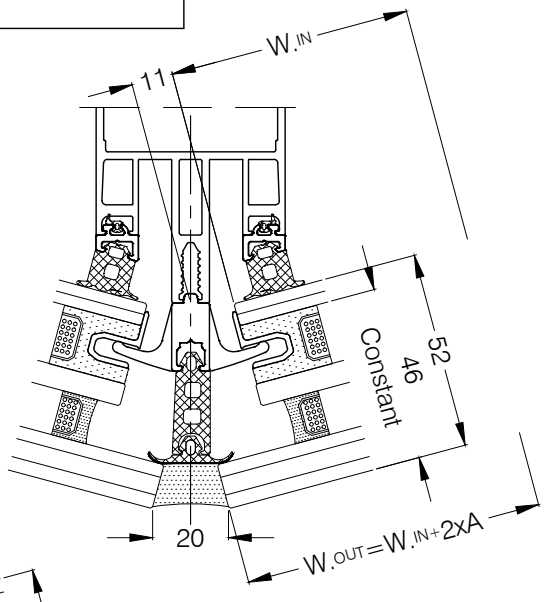

Fabricators Guide

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Comar 6EFT

4 sided SG & 2 sided SGH



3.62

Outward Angle 15°		Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	34	36	38	A (mm)
2102	6mm 2101	12			X						X	10.4
		10			X					X		9.9
		8			X				X			9.4
		6			X			X				8.4
2104	8mm 2103	12		X						X		10.4
		10		X					X			9.9
		8		X				X				9.4
		6		X			X					8.4
2106	10mm 2105	12	X						X			10.4
		10	X					X				9.4
		8	X				X					9.4
		6	X			X						8.4

TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH

	12	10	8	6
2172- 2mm Joint Gasket		X	X	X
2176- 4mm Joint Gasket	X			
2020- 56mm Drainage Diverter	X	X	X	---



2432- 18mm Double Glazing Clamp

1331- 15° Glazing Adapter + 2490 Gasket

3030-29mm Screw

2200- 18mm Thermal Break

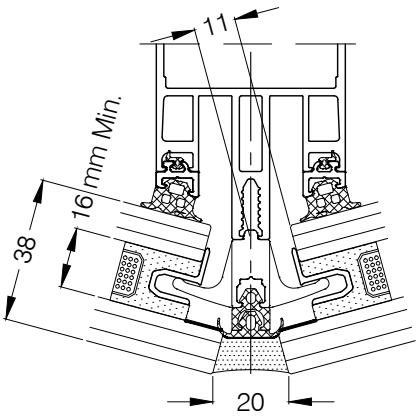

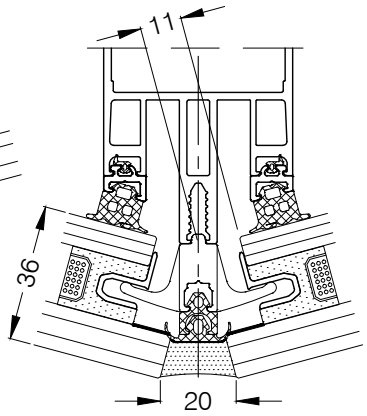

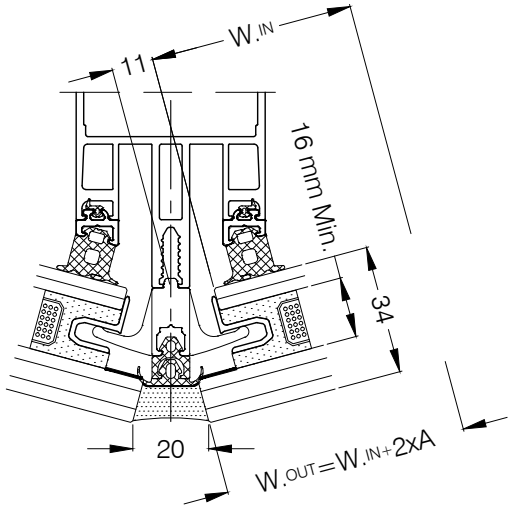

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Fabricators Guide

Glazing charts 3

Comar 6EFT

4 sided SG & 2 sided SGH



3.63

Fabricators Guide

Outward Angle 22.5°	Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	34	36	A (mm)
2102 6mm 2101	10			X					X	16.1
	8			X				X		15.2
	6			X			X			14.5
2104 8mm 2103	10		X					X		16.1
	8		X				X			15.2
	6		X			X				14.5
2106 10mm 2105	10	X					X			16.2
	8	X				X				15.3
	6	X			X					14.5
2025 Drainage Diverter	X X ----									

TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH

2433- 18mm Double Glazing Clamp

1332- 22.5° Glazing Adapter + 2490 Gasket

3030-29mm Screw

2176- 4mm Joint Gasket

2166- 6mm Gasket

2200- 18mm Thermal Break



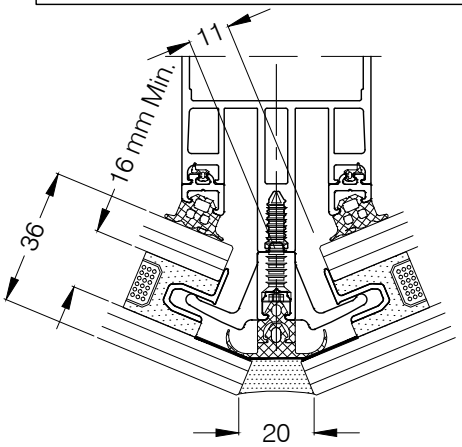

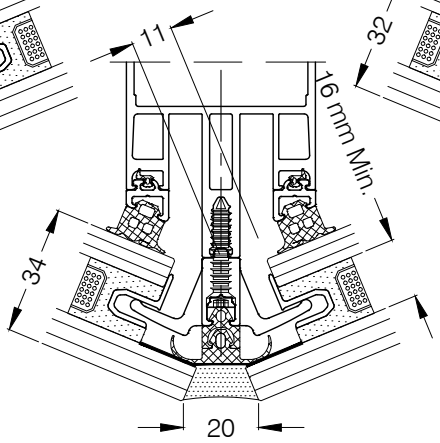

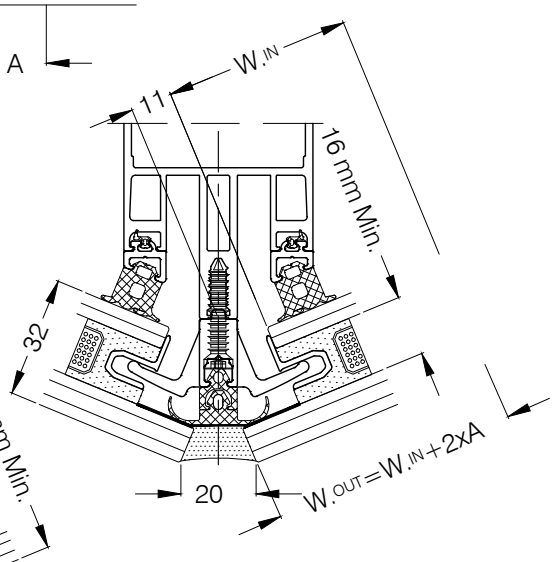

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Comar 6EFT

4 sided SG & 2 sided SGH



3.64

Outward Angle 30°		Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	34	A (mm)	TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH
2102 6mm 2101											
		8			X				X	22.8	
		6			X			X		22.1	
2104 8mm 2103											
		8		X				X		22.8	
		6		X			X			21.8	
2106 10mm 2105											
		8	X				X			22.7	
		6	X			X				22.1	

2178- 8mm Joint Gasket

2166- 6mm Gasket

Clamp Outer Angle 30°

1333- 30° Glazing Adapter + 2490 Gasket

3008-38mm Screw +3091 Washer

2200- 18mm Thermal Break

2025 Drainage Diverter



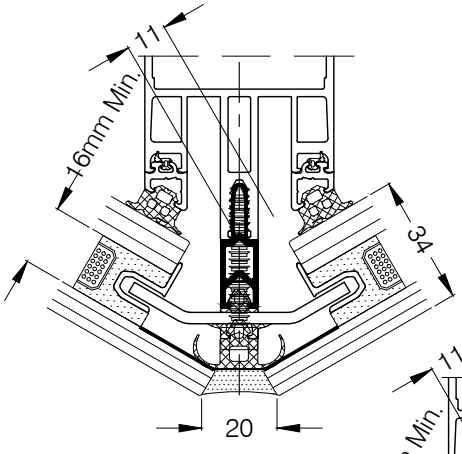

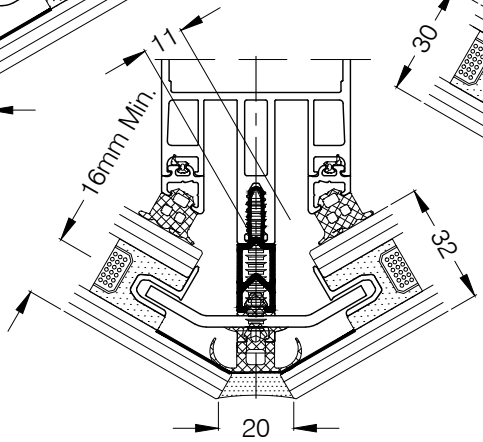

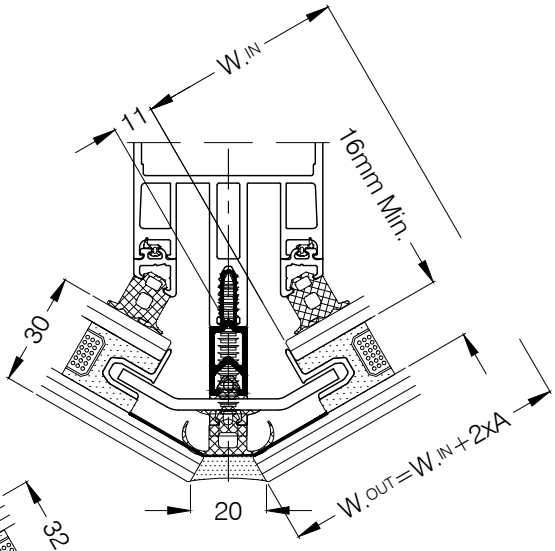

Fabricators Guide

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Glazing charts

3

Comar 6EFT

4 sided SG & 2 sided SGH



3.65

Outward Angle 37.5°		Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH
2102	6mm 2101	6			X			X	
2104	8mm 2103	6		X			X		
2106	10mm 2105	6	X			X			

2176- 4mm Joint Gasket

Clamp Outer Angle 30°

1334- 37.5° Glazing Adapter + 2490 Gasket

3008-38mm Screw +3091 Washer

2203- 34mm Thermal Break

2025 Drainage Diverter

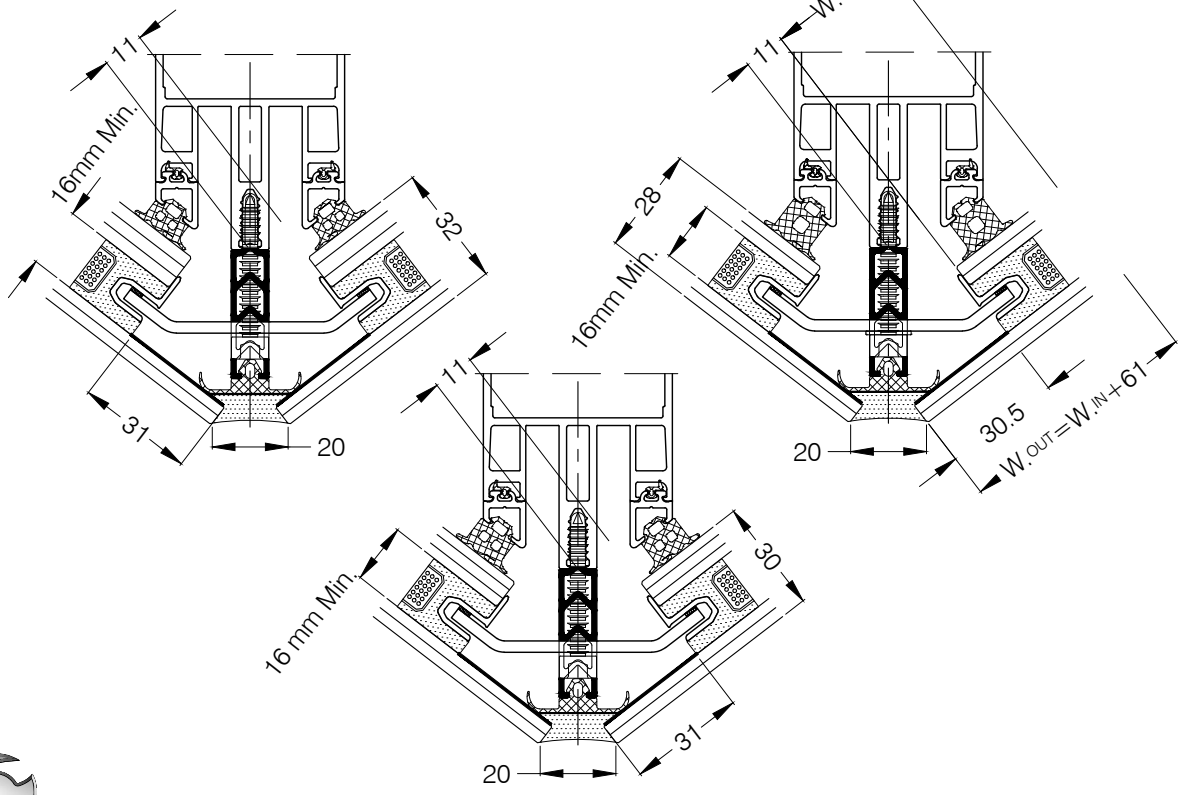

Fabricators Guide

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Copyright and ownership of this drawing is vested in EFT, Euro Facade Systems Ltd, whose prior written consent is required for its use, reproduction or for publication to any third party. All other rights reserved. Subject to modifications.

Comar 6EFT

4 sided SG & 2 sided SGH



3.66

Outward Angle 45°		Outer Glass Pane (mm)	Inner Glass Pane (mm) 6-7	8-9	10-11	Glazing Thickness (mm) 28	30	32	TRANSOM ITEMS SEE GLAZING CHART FOR 4 SIDE SG OR 2 SIDE SGH
2102	6mm 2101	6			X			X	
2104	8mm 2103	6		X			X		
2106	10mm 2105	6	X			X			



1265+2490 Gasket



2404



FM134 Thermal Foam

3009-42mm Screw +3091 Washer

2025 Drainage Diverter

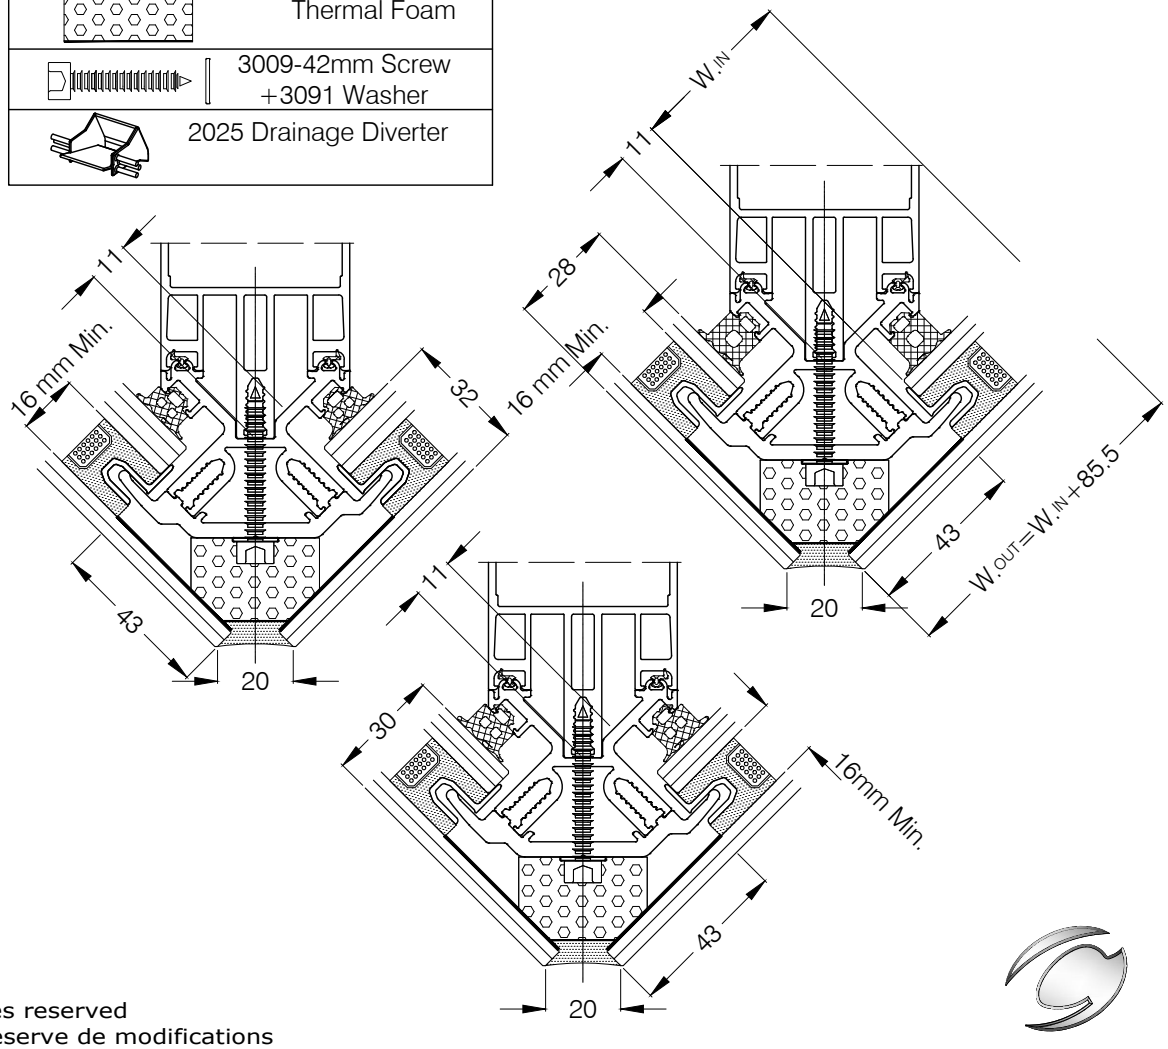

Changes reserved
Sous reserve de modifications
Änderungen vorbehalten

Issue: 05
Date : 10-16

comar
ARCHITECTURAL ALUMINIUM SYSTEMS

Fabricators Guide