



CONTENTS

COMAR 7P.i COMMERCIAL DOOR

PART 1 INTRODUCTION / SPECIFICATION / BROADSHEETS

Introduction	Page No. 1.01
System Specification	1.02
Broadsheet Profiles	1.03-1.04
Broadsheet Ancillaries	1.05-1.06
Size Limitations	1.06.1-1.07
Lock and Mid Rail Position	1.08
Bead Screw Positions	1.09
Working Drawing	1.10-1.11
Fixing Details to Structure	1.12
PAS 24 Security Option Tested Door.	1.13

PART 2 FULL SIZE SECTIONS



















Threshold Details	2.01 - 2.02
Head Details	2.03 - 2.04
Auto Door Head Details	2.05
Jamb Details	2.06 - 2.09
Meeting Stile Details.	2.10 - 2.11
Midrail Details	2.12 - 2.13
Jamb Detail - Increased Deep Lock Stile	2.14
Jamb Detail - Panic Device Side Detail	2.15


PART 3 FABRICATION

Cutting Lists	3.01 - 3.08
Assembly Details	3.09 - 3.12
Header Bar/Plate Preparation Details.	3.13
Top & Bottom Preparation Details	3.14
Concealed Closer Preparation Details	3.15 - 3.17
Threshold Preparation	3.18
Lock Preparation	3.19 - 3.24
Flush Bolt Preparation	3.25 - 3.26
Cleat Assembly & Preparation	3.27 - 3.28
MidRail Preparation	3.29
Keep Assembly	3.30
Bead Preparation	3.31
Panic Exit Preparation	3.32 - 3.38
Electric Strike Option	3.39 - 3.45
Threshold Preparation	3.46 - 3.47
Panic Exit LH-745 Preparation	3.48

PART 4 GLAZING


Standard Option	4.01 - 4.03
Security Option	4.04

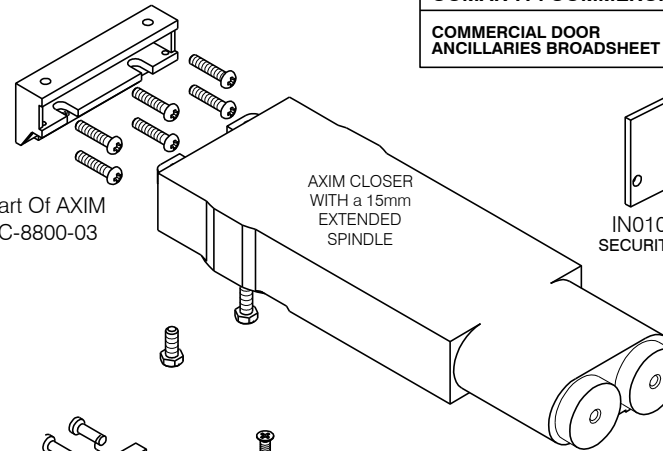



CS998
52mm Mullion Adapter

LK-092-SVR
ESCUTCHEON




XX3092XSLF
#10x22



AC0245
Electric Strike Body Spacer




LK479XSLF
35/10 HALF CYLINDER

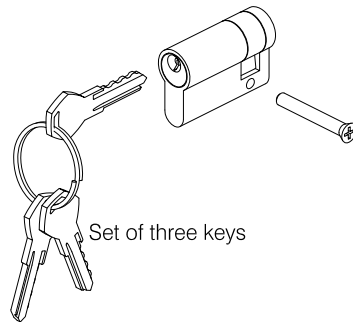


Set of three keys


LK-2100-75
40.75mm ROUND CYLINDER




ES-2100-381
11.3mm EXTENSION LIPS




LK-2100-25-R Deadlatch

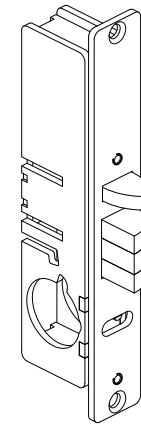


LK-2100-25-E Deadlatch

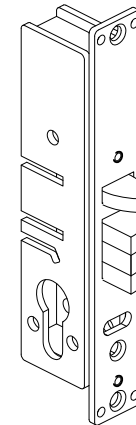


LK-2100-41 Face Plate





ES-2100-12FSAF or SEC
ES-2100-24FSAF or SEC

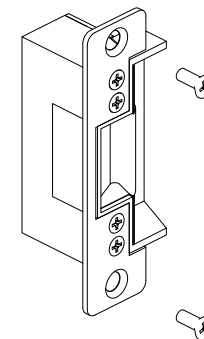



Copyright & ownership of this drawing is vested in COMAR Architectural Aluminium Systems, whose prior written consent is required for its use, reproduction or publication to any third party. All other rights reserved. Subject to modifications without prior notification.

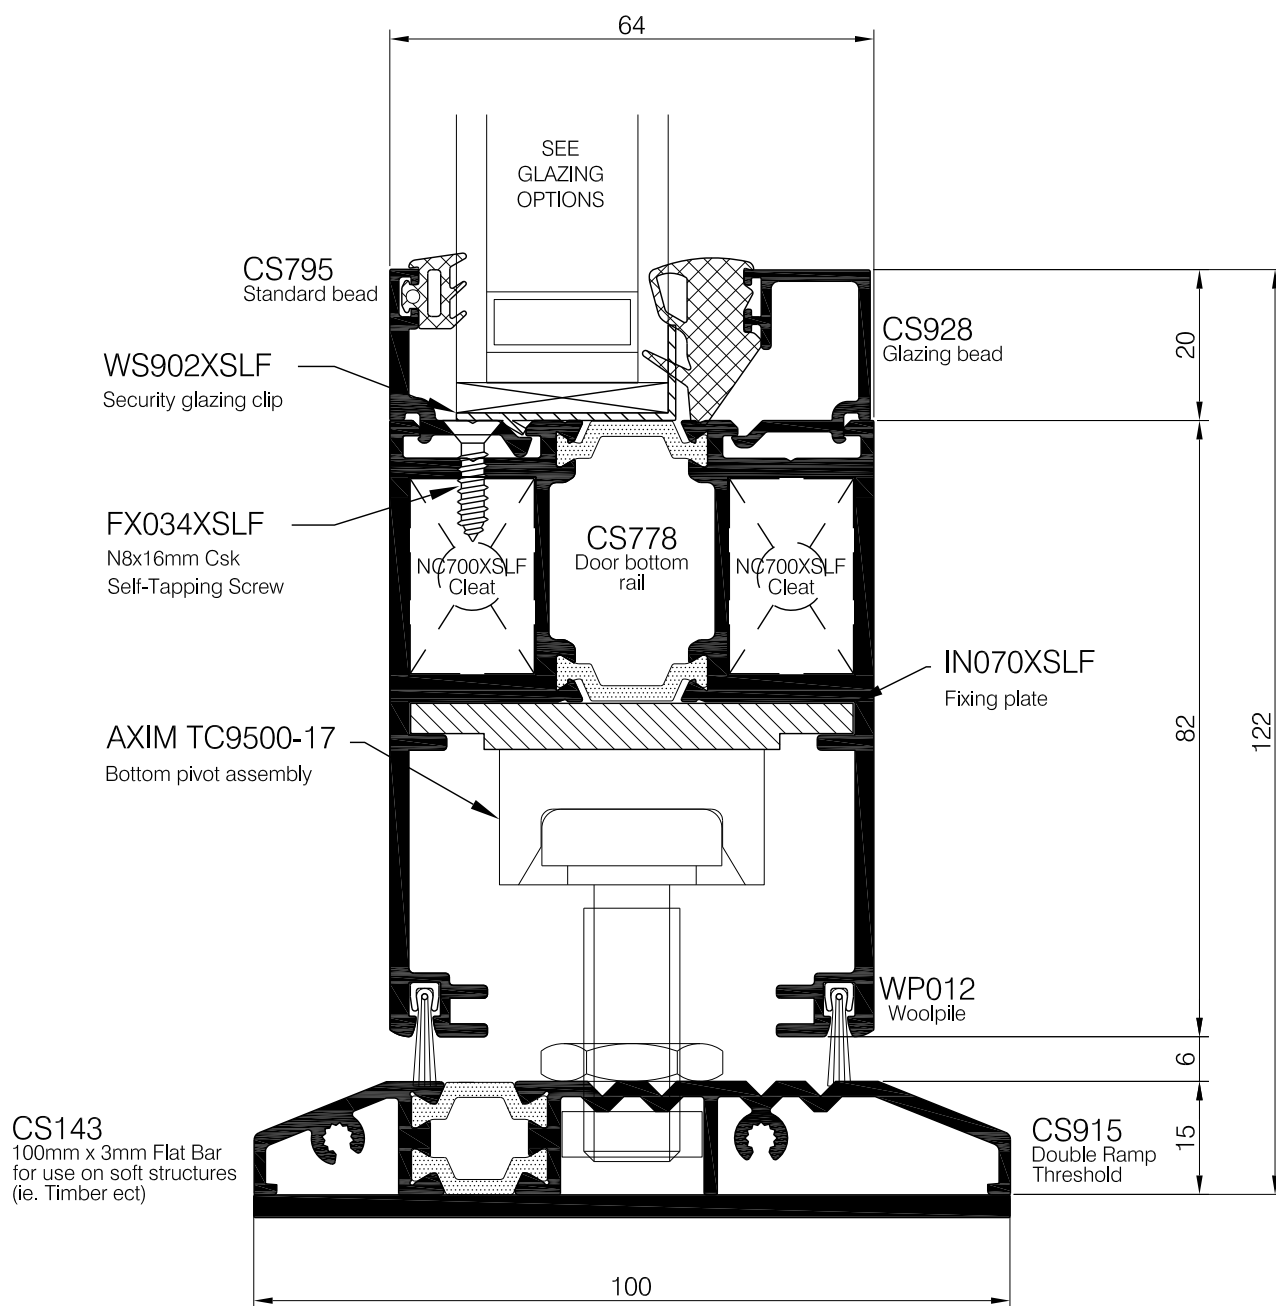


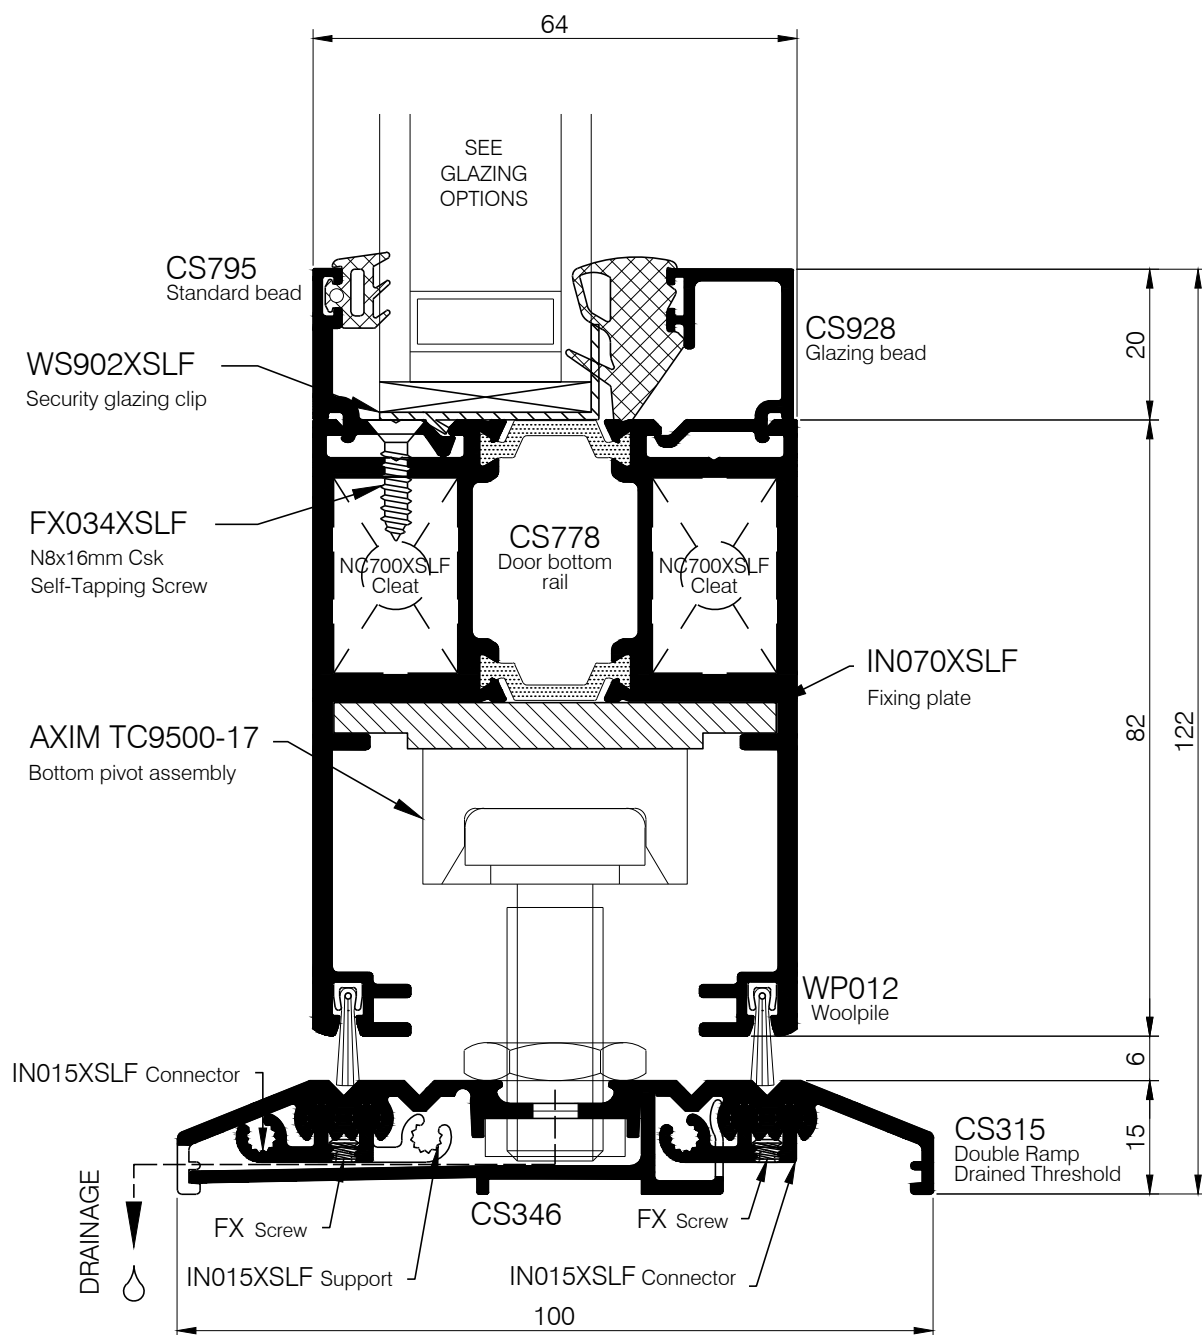

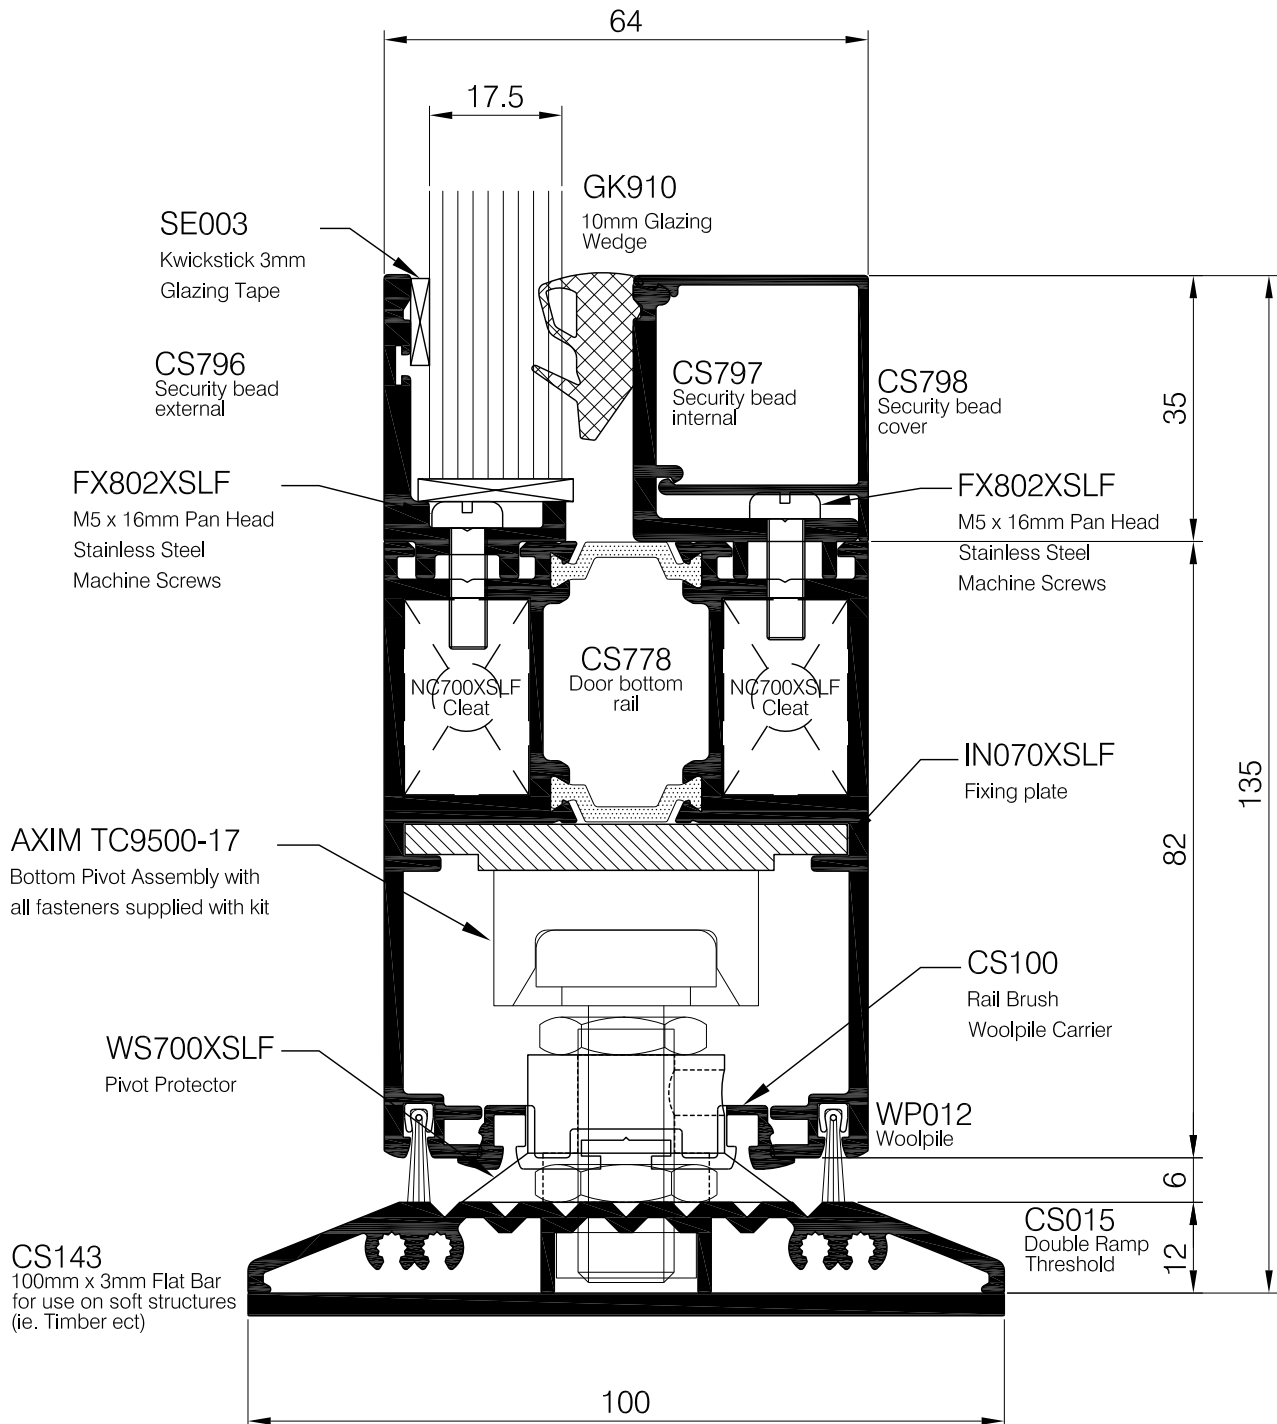


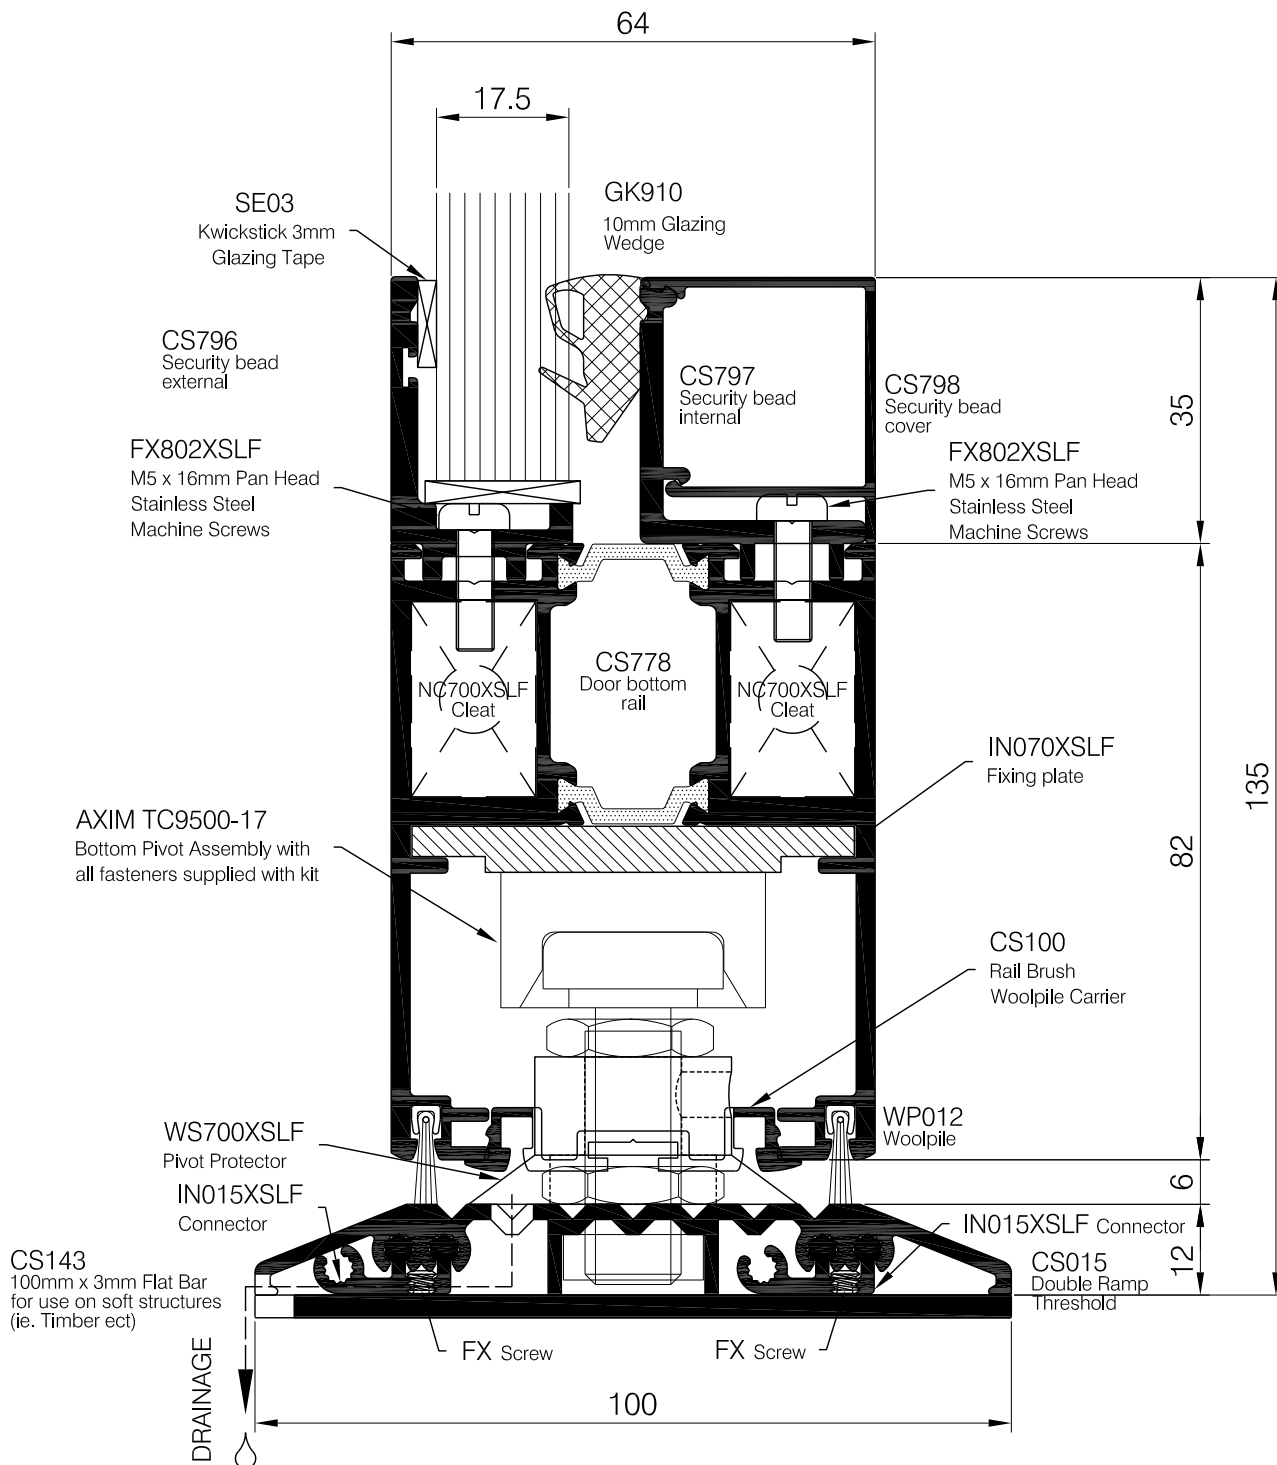


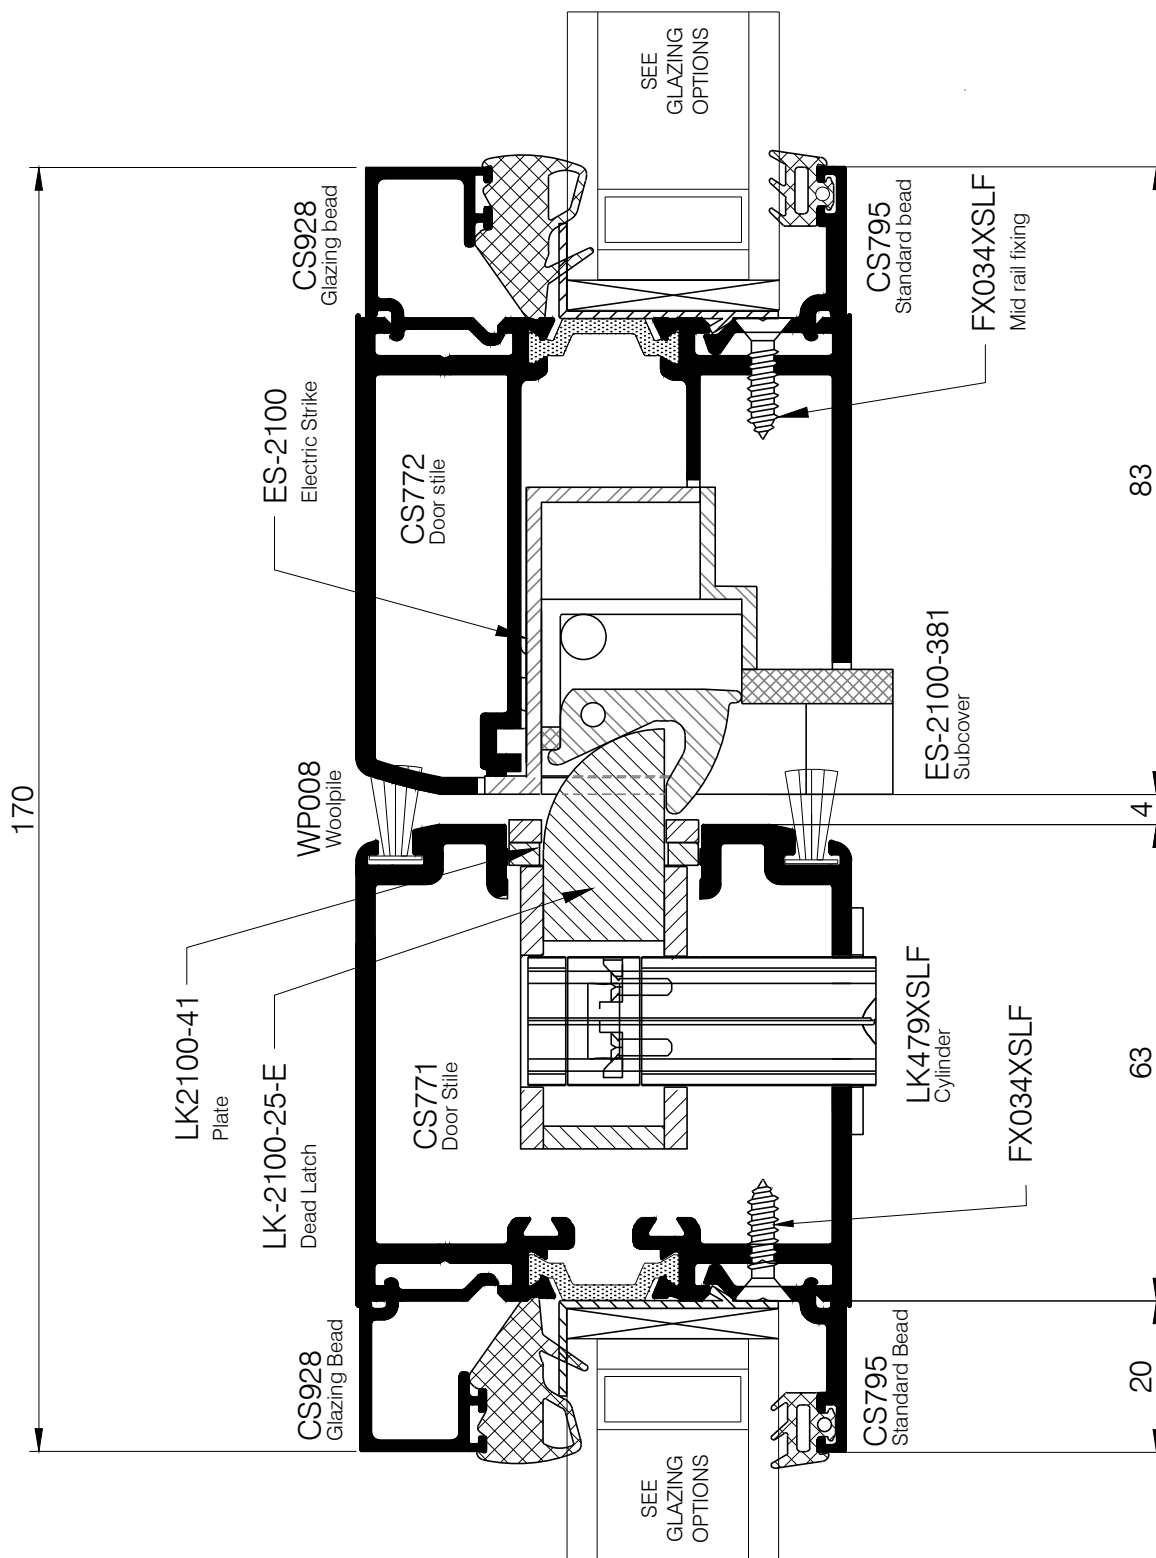

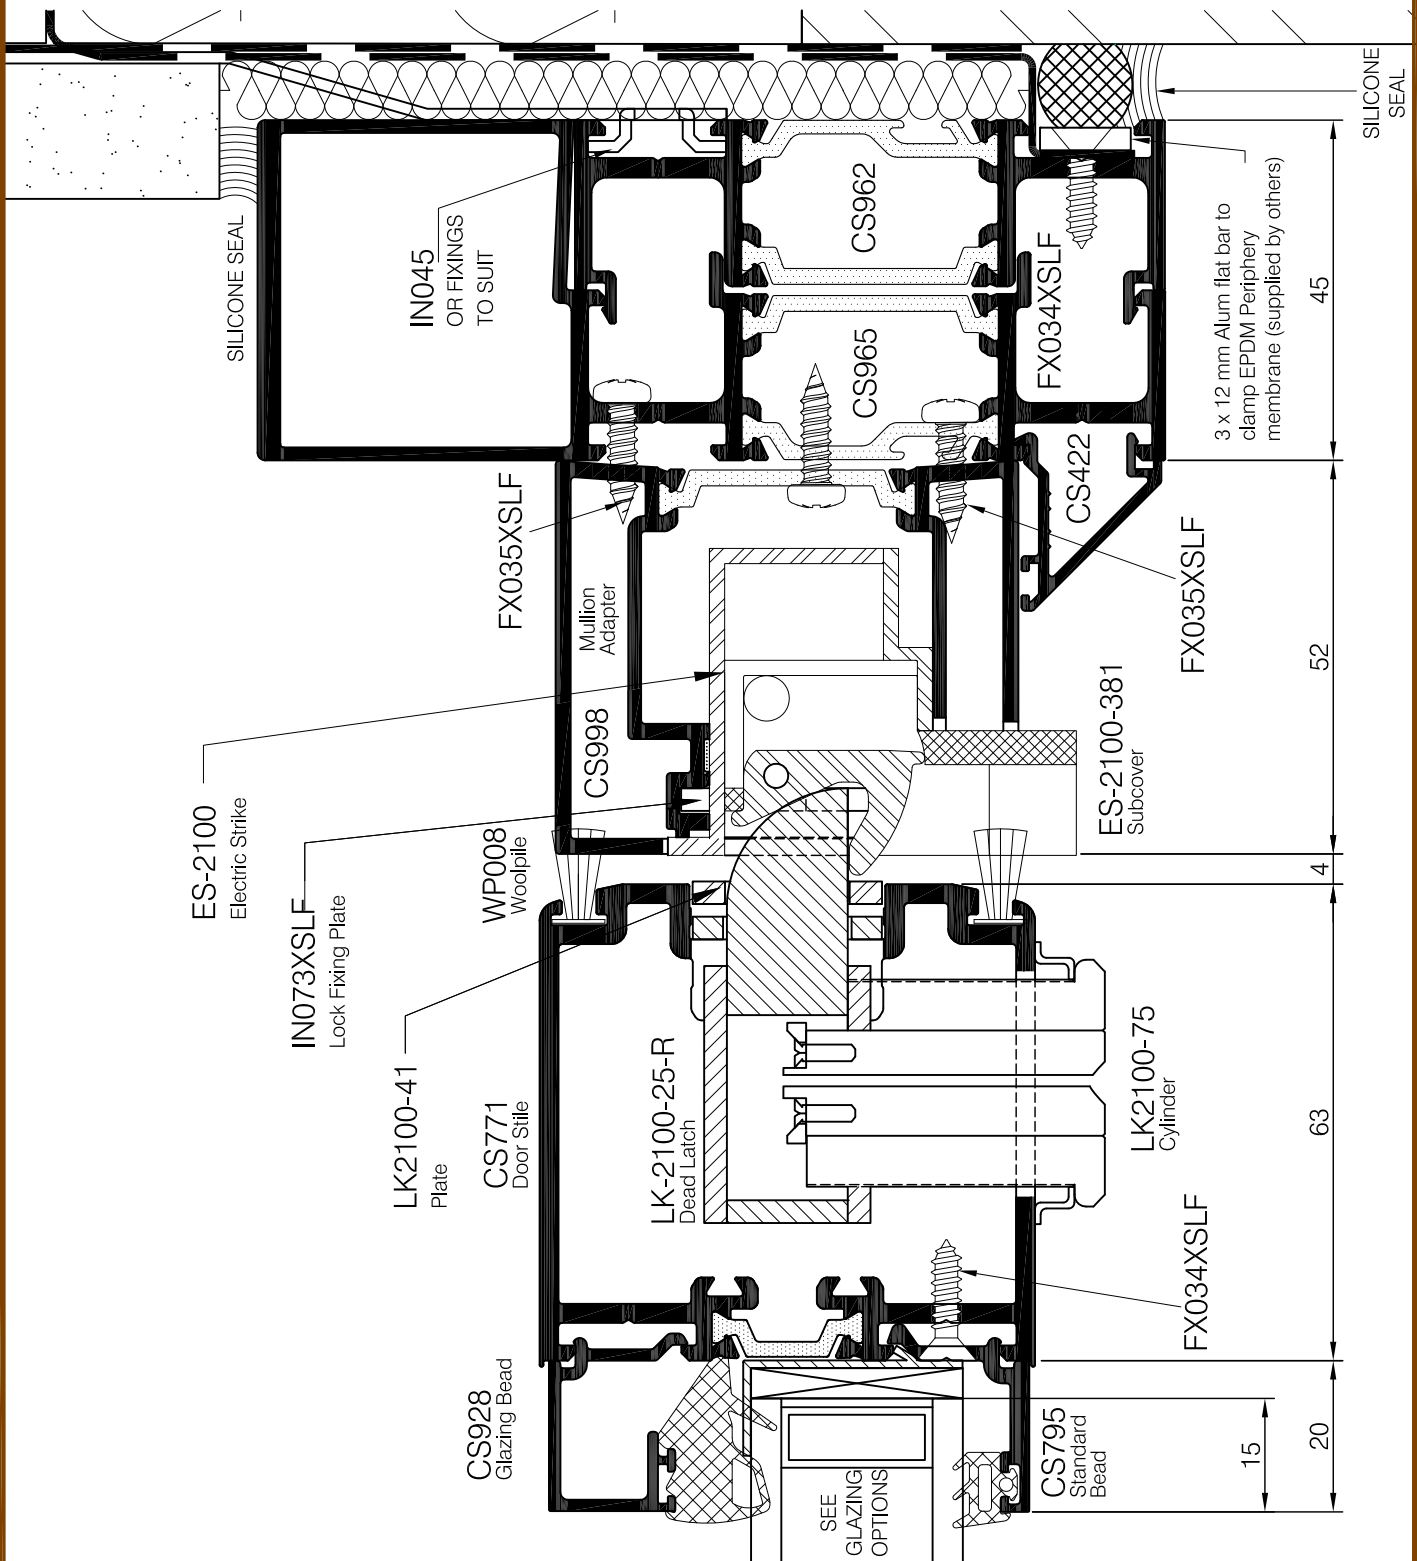


Copyright & ownership of this drawing is vested in COMAR Architectural Aluminium Systems, whose prior written consent is required for its use, reproduction or publication to any third party. All other rights reserved. Subject to modifications without prior notification

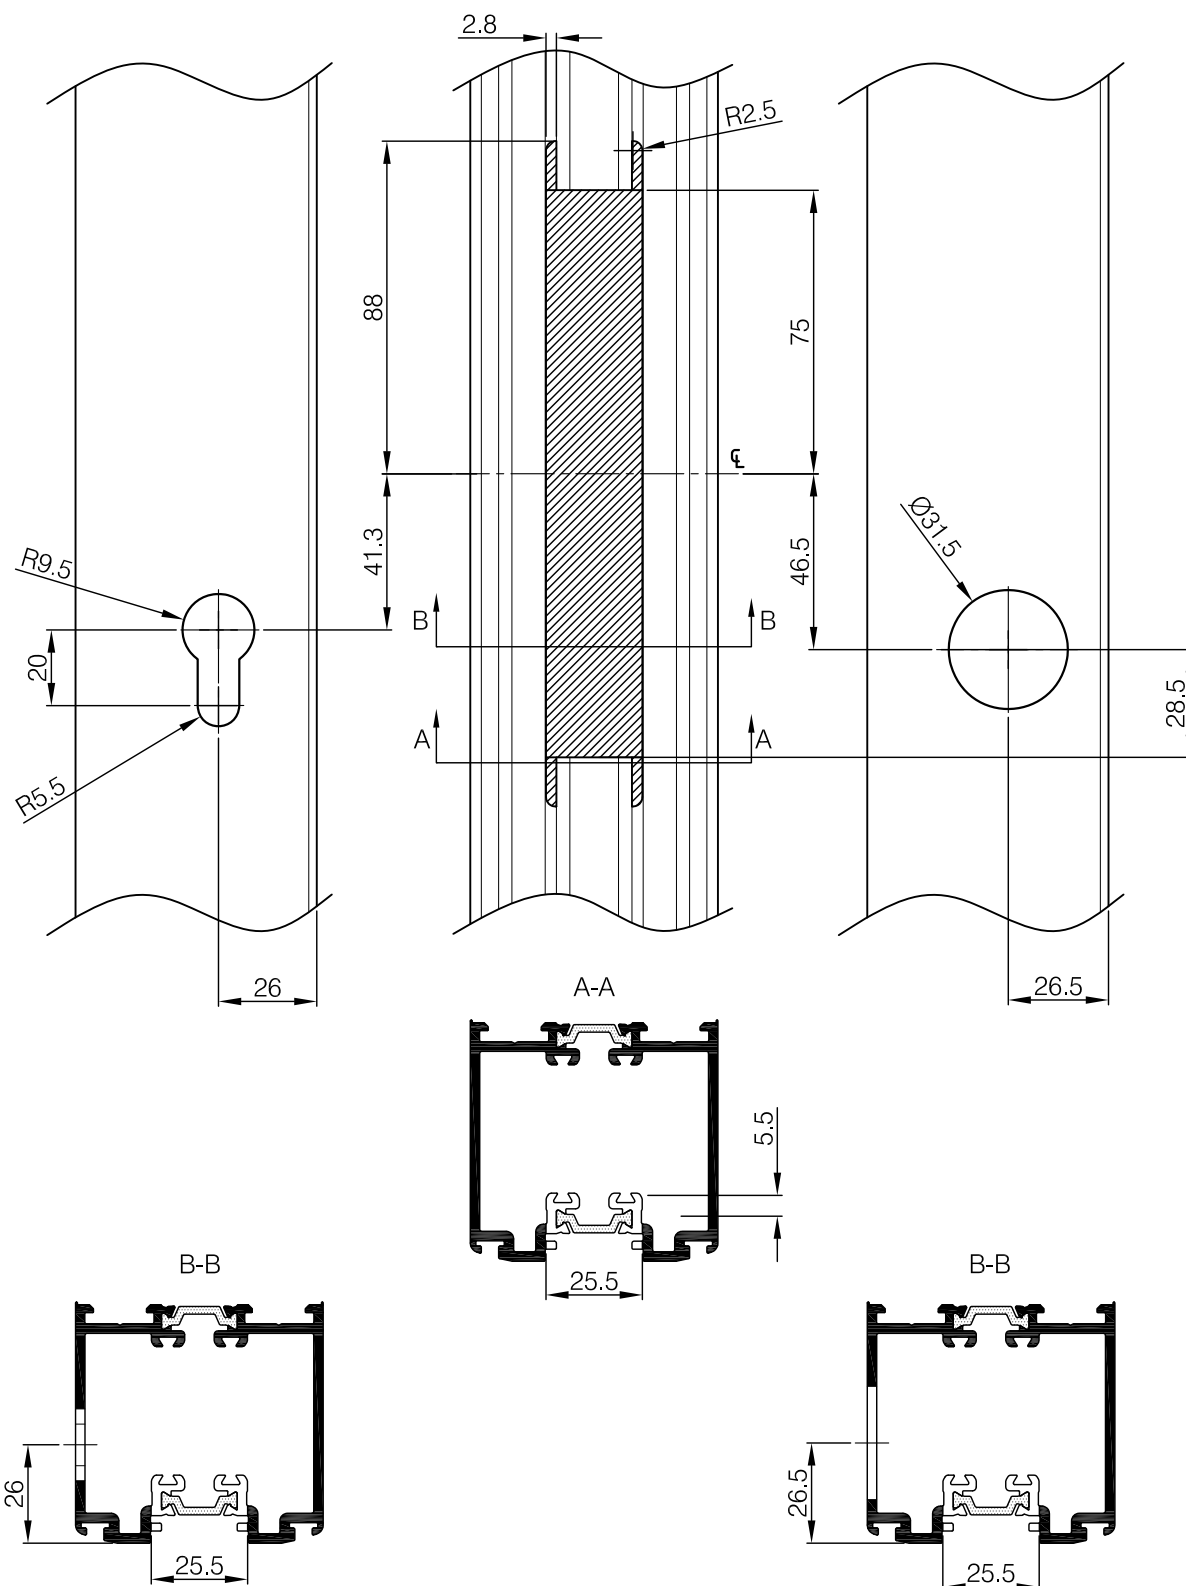

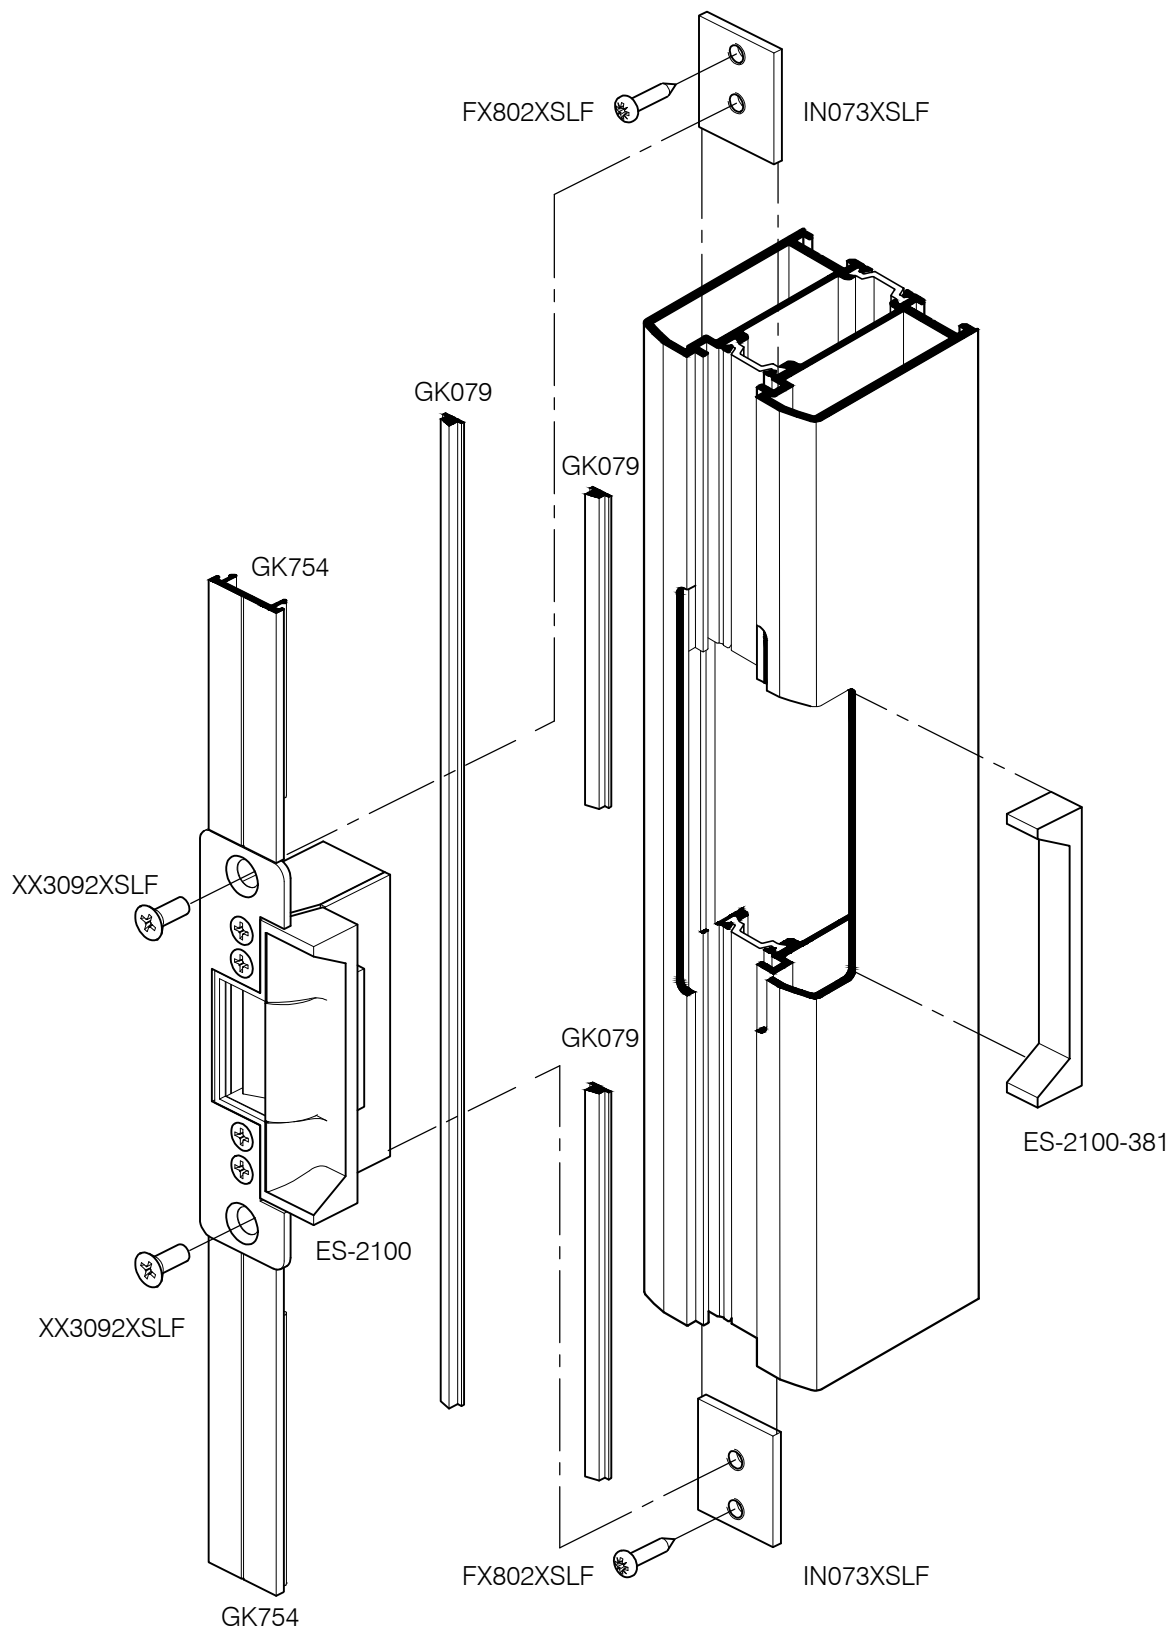


Copyright & ownership of this drawing is vested in COMAR Architectural Aluminium Systems, whose prior written consent is required for its use, reproduction or publication to any third party. All other rights reserved. Subject to modifications without prior notification.




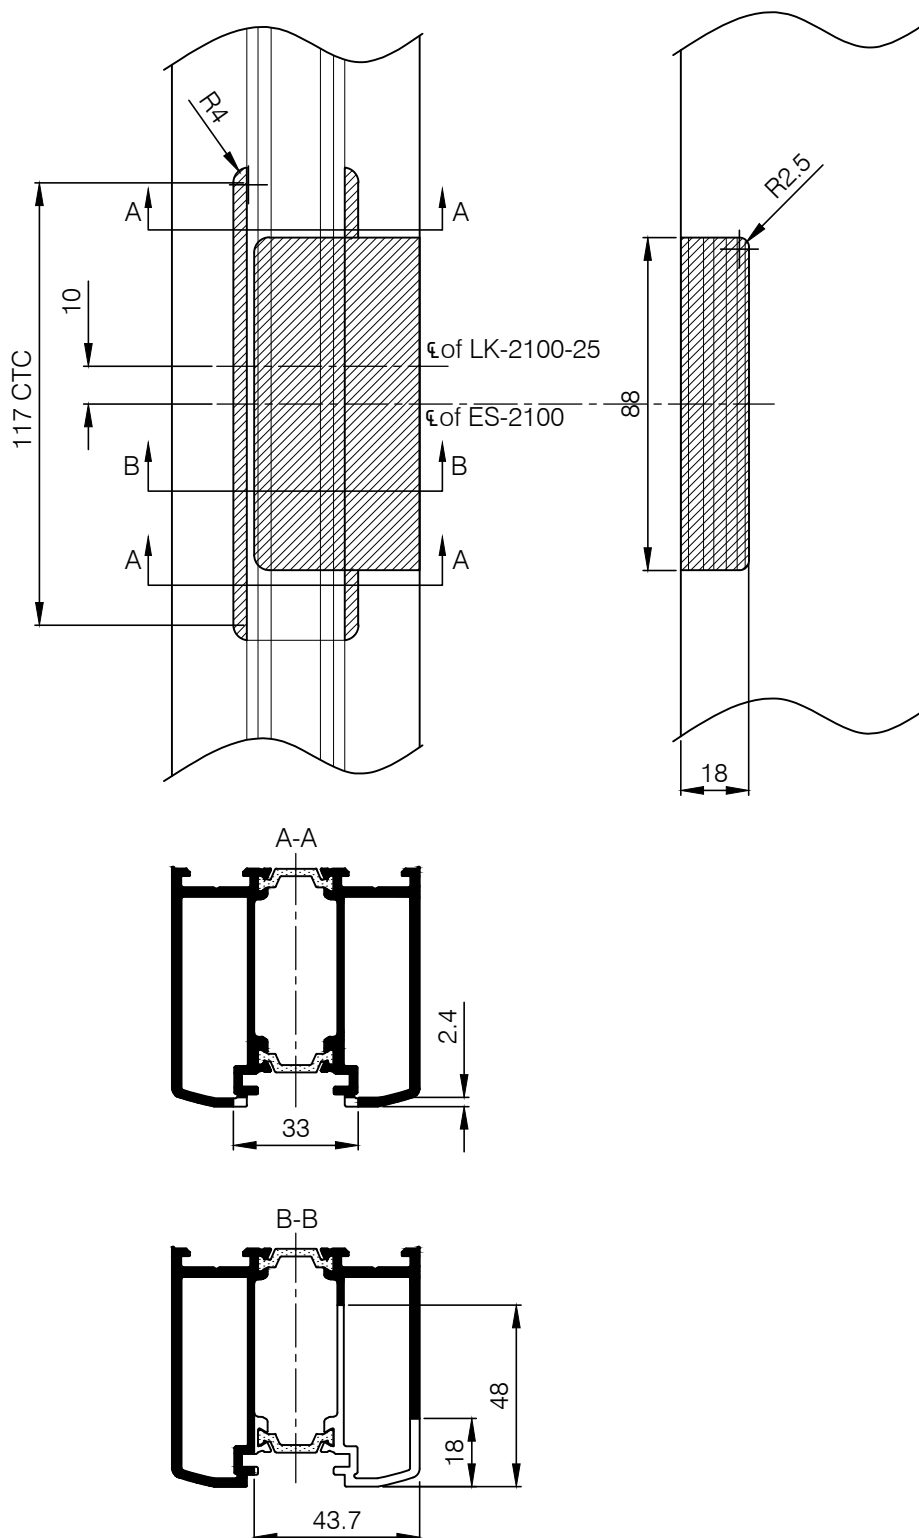

Copyright & ownership of this drawing is vested in COMAR Architectural Aluminium Systems, whose prior written consent is required for its use, reproduction or publication to any third party. All other rights reserved. Subject to modifications without prior notification.



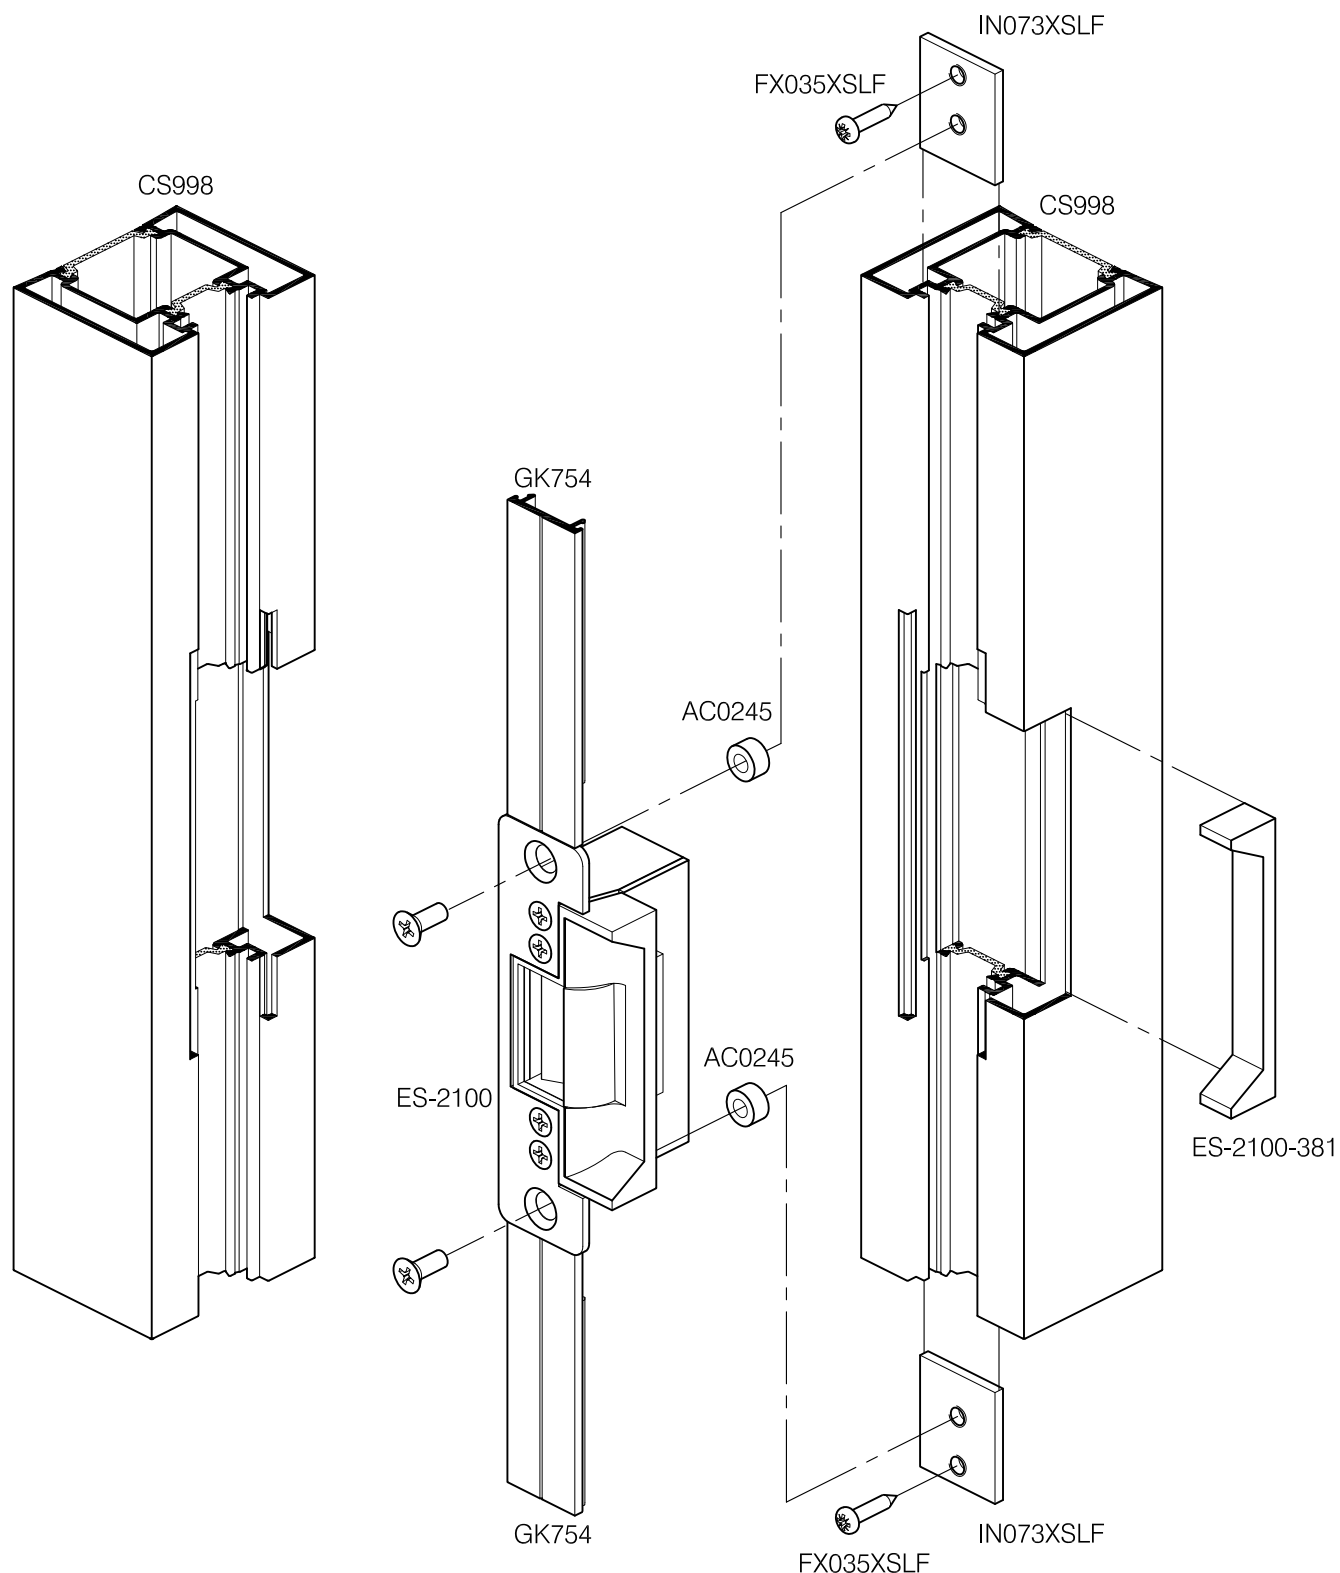

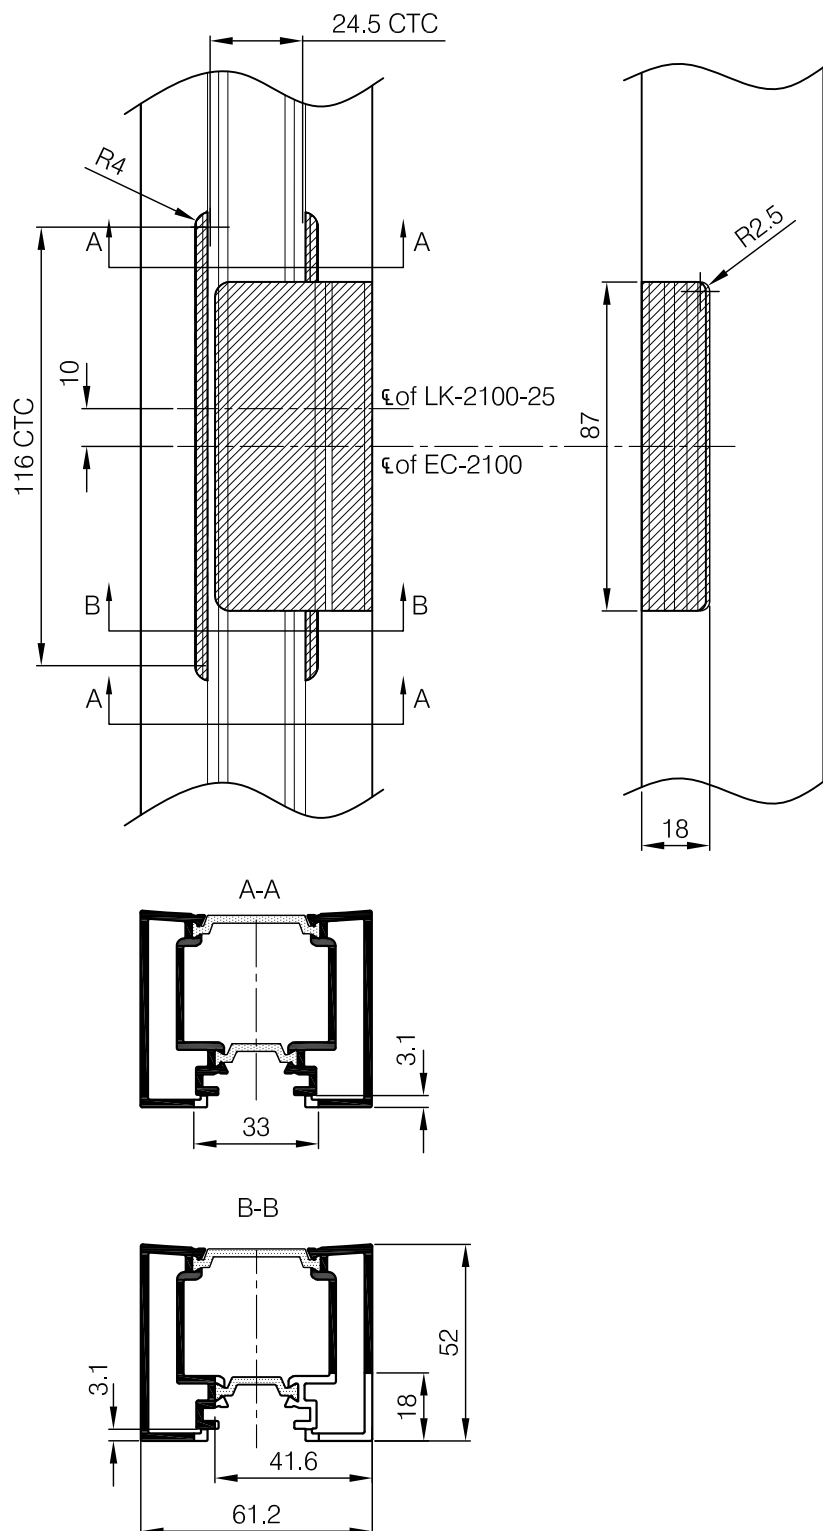

Copyright & ownership of this drawing is vested in COMAR Architectural Aluminium Systems, whose prior written consent is required for its use, reproduction or publication to any third party. All other rights reserved. Subject to modifications without prior notification.








comar
ARCHITECTURAL ALUMINIUM SYSTEMS





THE PARKSIDE GROUP LTD
UNIT 5 ° THE WILLOW CENTRE
17 WILLOW LANE ° MITCHAM
SURREY ° CR4 4NX
Tel: 020-8685 9685 Fax: 020-8687 1142
Email: technical@parksidegrp.co.uk
Web Site: <http://www.comar-alu.co.uk>

SCALE	NTS	© A4
DATE	14/03/2016	
DRAWN	KP/CAD	
DRG. No.	C7-Pi-CD 3.45	

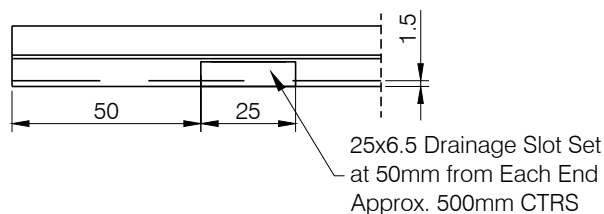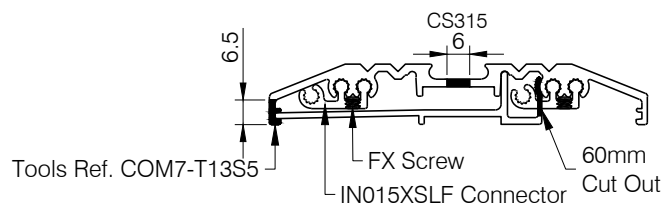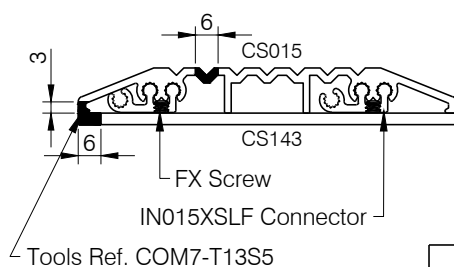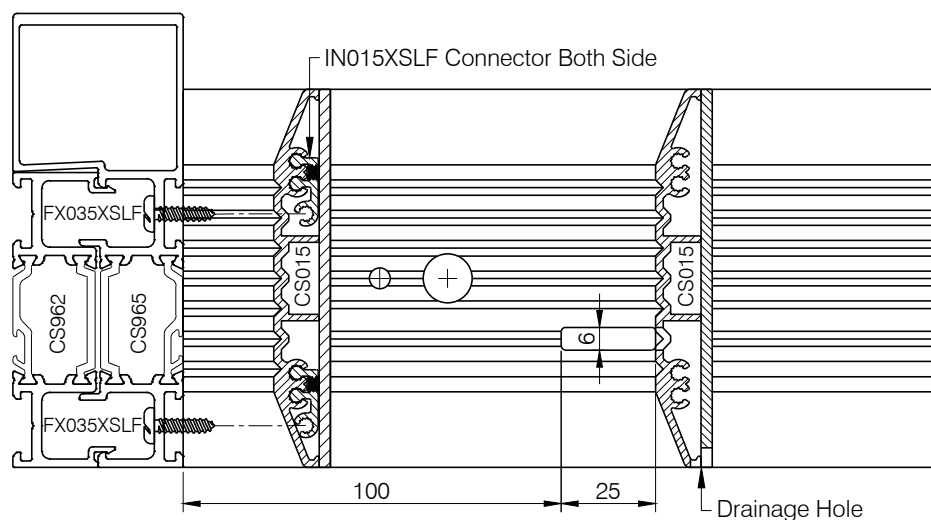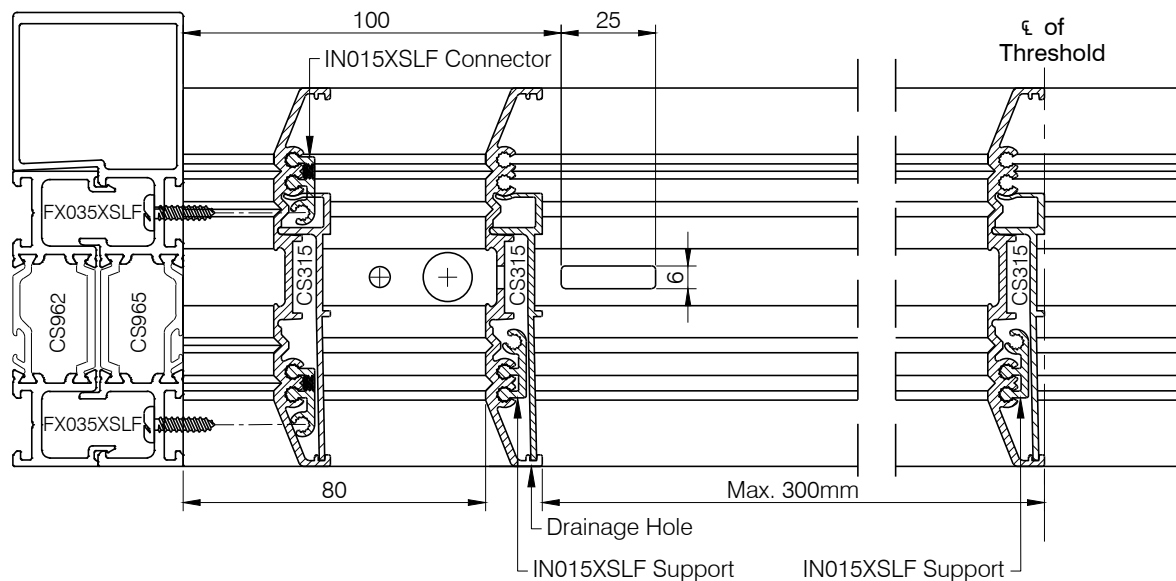

Copyright & ownership of this drawing is vested in COMAR Architectural Aluminium Systems, whose prior written consent is required for its use, reproduction or publication to any third party. All other rights reserved. Subject to modifications without prior notification

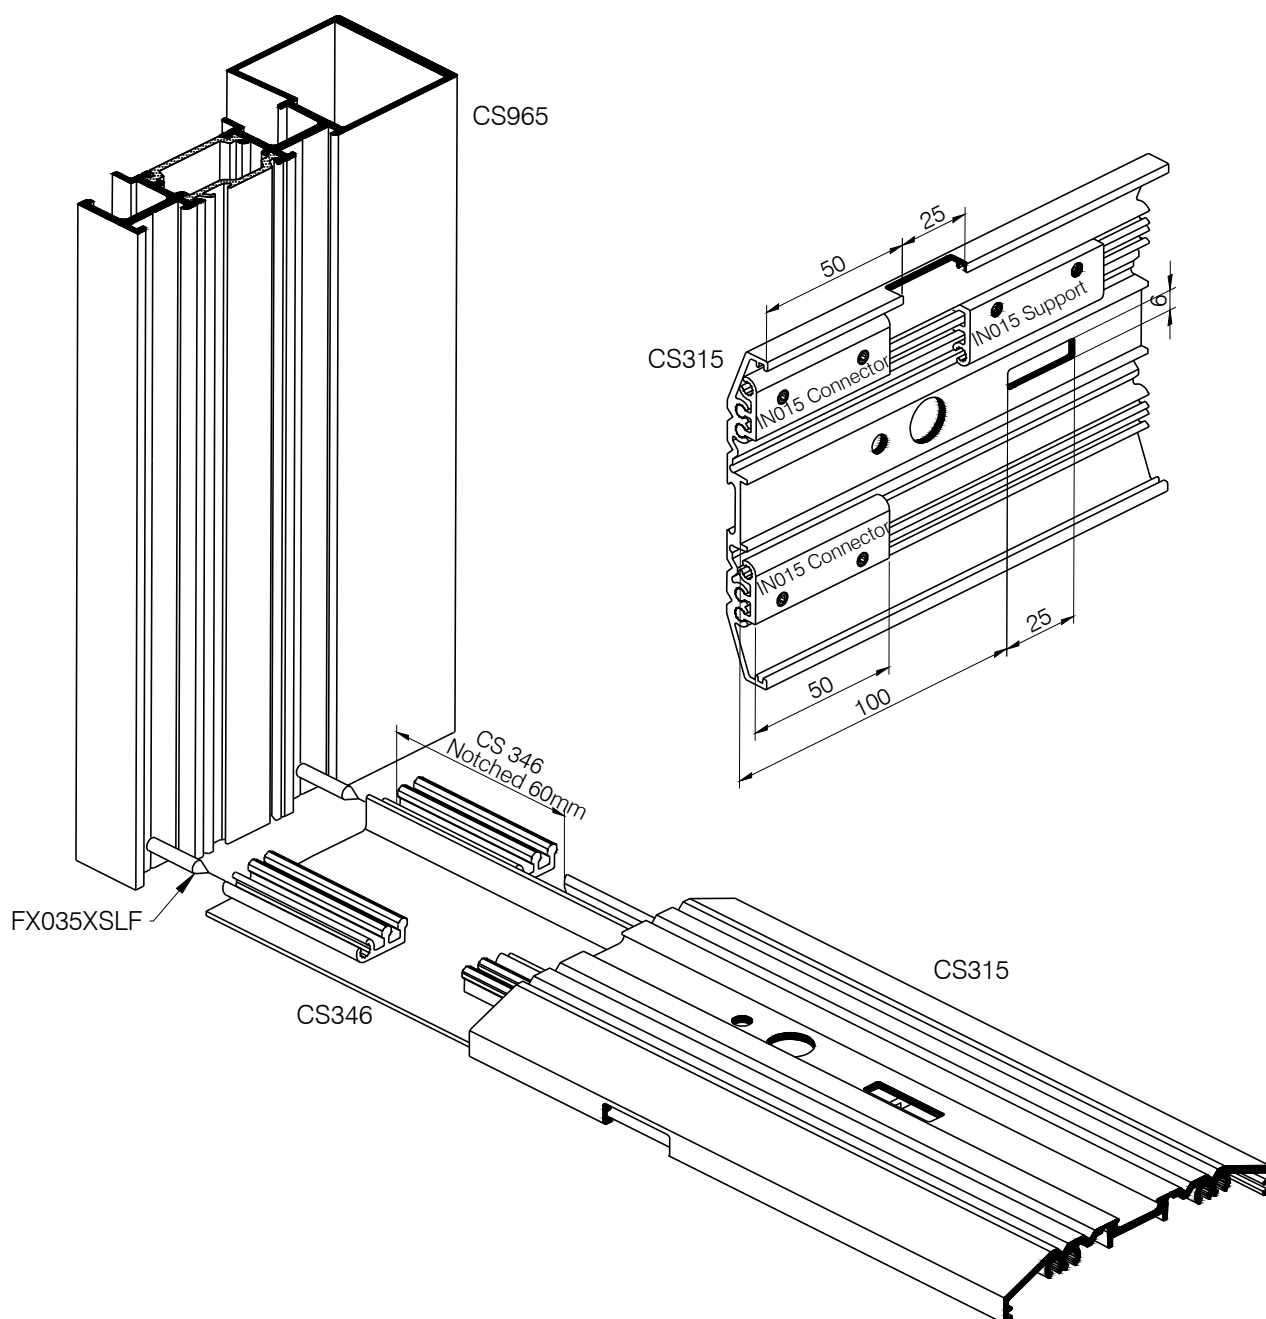

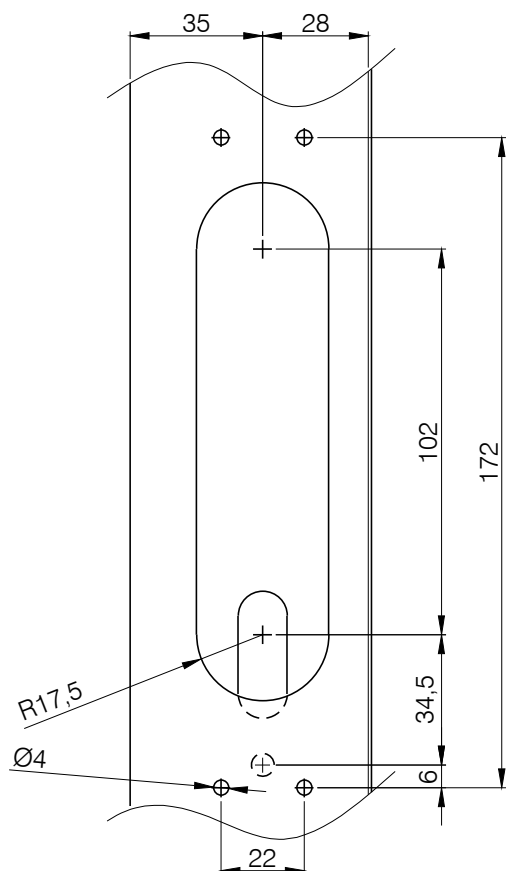

Cutting Prep to fit to
 outer face. Dashed lines
 indicate panic exit
 position (34.5 & 6)

Key Controlled Outside sprung lever
 handle for use with PR7085, PR7085P,
 and PR7100 concealed rod Panic
 Devices.

Uses Axim screw in Mortice cylinder
 with MS type CAM .

Non handed. (Field reversible).

