



Comar 5P.i HSW

A practical aluminium window system engineered for reliable, everyday performance.

Its smooth horizontal sliding operation makes it the ideal choice for tight sites, restricted access areas, and projects where every millimetre of space counts without compromising on quality or function.

Ideal for all external and internal applications.

System Snapshot



Comar's P.i insulation technology



Concealed locking - 78mm sightline at interlock



Shallow 65mm system depth

Comar 5P.i HSW

Key Features

- ✓ Aluminium profiles are extruded separately, then rolled together with polyamide strips providing an extremely effective thermal break to ensure that buildings are kept warm in the winter and cool in the summer
- ✓ 2, 3, and 4 sliding sash configurations

Materials

- ✓ 70% recycled aluminium and recyclable at end of life


Finishes

- ✓ Available in polyester powder coated or anodised finishes
- ✓ Mill finish available
- ✓ Full range of RAL colours available
- ✓ Dual colour options available
- ✓ Astragal bars can be added to further enhance the design

Product Specifications

Sizes	
Maximum width	6000mm (4 sash)
Maximum height	1800mm
Sightlines	78-109mm
Weight	180Kg per sash
Glazing	
Thickness	10-29mm

For further information, please refer to the fabrication manuals.




Interested in learning more?

Contact ask@builtwithbailey.com or visit builtwithbailey.com or scan the QR code.



Sill Details Standard Frame

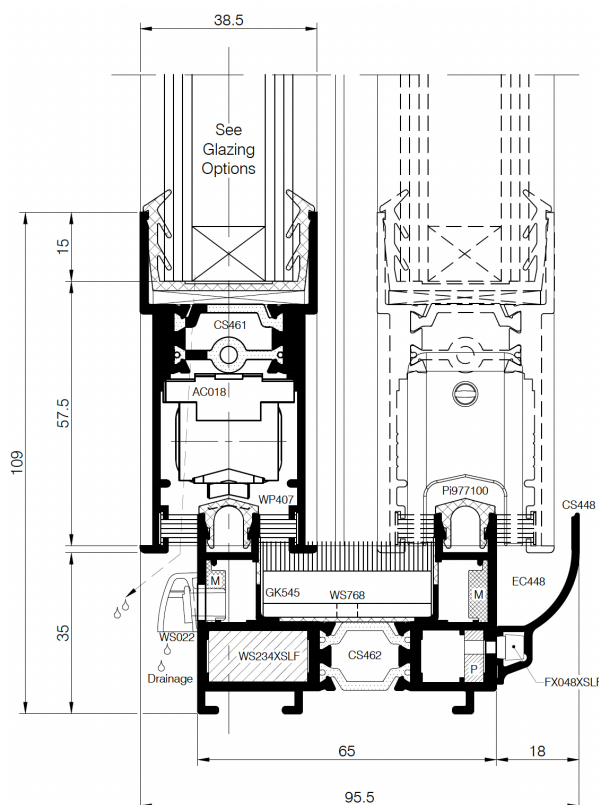

M WS416XSFL Alignment Square

P WS415XSFL Plastic Chevron

⬇ Drainage

For Glazing options, please contact our technical team.

Copyright & ownership of the drawing is vested in Bailey CW Limited whose prior written consent is required for its use, reproduction or publication to any third party. All other rights reserved. Subject to modifications without prior notification.