



Comar 7P.i Legacy Slimline Door

Heritage Solution

Art Deco-inspired with a sleek modern edge, this bespoke multi-panel entrance door combines striking design with thermal efficiency and secure multipoint locking system.

Available in single or double options that open in or out, the Slimline Door adds a unique, retro-inspired element to any traditional or contemporary property.



System Snapshot



U-values as low as 1.6 W/m²k*



Residential or commercial



Traditional design styling



Double glazed



*U values based on CEN sized window

Comar 7P.i Legacy Slimline Door

Heritage Solution

Key Features

- ✓ Ultra slim sightlines provide superior aesthetics, without compromising performance
- ✓ Simple fabrication methods available for ease and speed
- ✓ U values as low as 1.6 W/m²k can be achieved using double glazing, easily achieving the current Building Regulations for both new build and refurbishment projects


Materials

- ✓ 70% recycled aluminium and recyclable at end of life



Finishes

- ✓ Available in polyester powder coated or anodised finishes
- ✓ Mill finish available
- ✓ Full range of RAL colours available
- ✓ Dual colour options available
- ✓ Astragal bars can be added to further enhance the design features of the window

Threshold Detail (54mm Single Door) - CS5734 & CS5761

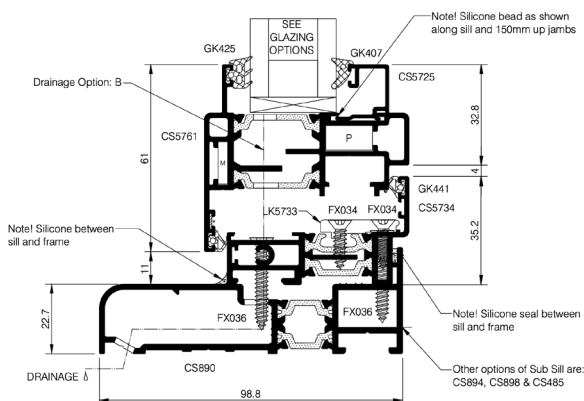

- A Face drained
- B Concealed drained
- M WS189XSLF Corner cleat
- P WS0378XSLF Corner cleat
- * WS515 Chevron

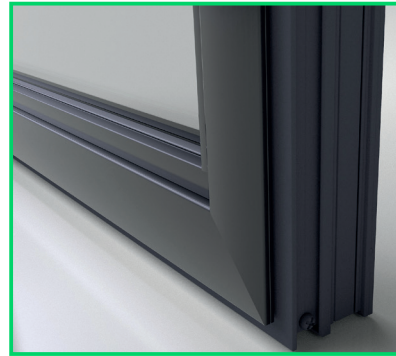


Product Specifications

Sizes		Tested	Designed
Maximum width	Single	1078mm	1100mm
	Double	1800mm	2188mm
Maximum height*	2300mm		
Outer frame	54mm & 75mm		
Sightlines* (for both open in/out)	72mm		
Maximum leaf weight	70Kg		
Maximum leaf area	2.2m²		
Handle height (from the bottom of leaf to the centre of lever)	Minimum	989mm	
	Maximum	1039mm	
Minimum U-Values (CEN Standard)			
Double glazed	1.6W/m²k		
Glazing			
Thickness	36mm		
Testing			
Security	PAS24:2022		
Weather BS6375-1	Air Permeability 600Pa		
	Water Tightness 200Pa		
	Wind Resistance 1200Pa		
Operation & Strength BS6375-2	✓		
Operation & Strength BS6375-3	✓		
CWCT & CAB industry standards	✓		

*Applies to both single or double doors

For further information, please refer to the fabrication manuals.



FM 679527 EMS 679524



Interested in learning more?

Contact ask@builtwithbailey.com or visit builtwithbailey.com or scan the QR code.



Copyright & ownership of the drawing is vested in Bailey CW Limited whose prior written consent is required for its use, reproduction or publication to any third party. All other rights reserved. Subject to modifications without prior notification.