Comar

Product Data Sheet



Comar 7



Non-thermally broken door range for commercial projects

Aluminium entrance solution designed for internal and sheltered external applications where thermal break performance is not required.

Available configurations:

- Auto Sliding Doors
- Sliding Doors
- Folding Sliding Doors
- Pivot Doors

System Snapshot

Suitable to withstand the rigours of high-traffic commercial applications

Contemporary design styling

Comar 7

Key Features

- Internal and external glazing options available, up to 36mm units
- Standardised hardware
- Seamlessly integrates with existing Comar systems
- Full tooling available to support fabrication

Materials

- 70% recycled aluminium and recyclable at end of life

Finishes

- Polyester Powder Coating to BS EN 12206-1 Part 1. Surface finish to a minimum of 60 microns standard, or enhanced to suit requirements, in accordance with ISO 9001, ISO 14001 and ISO 45001
- Anodised finishes to BS3987 to a minimum of 25 microns (AA25)
- Single colour options available

Product Specifications

Sizes	
Maximum width	817mm
Maximum height	2105mm
Sightlines (SASH)	70mm
Glass & panel thickness	up to 36mm
Embodied Carbon	
Aluminium	as low as 4.0Kg CO2e/Kg

For further information, please refer to the fabrication manuals.


FM 679527 EMS 679524

Police Preferred Specification

Interested in learning more?

Contact **projects@builtwithbailey.com** or visit builtwithbailey.com or scan the QR code.

Jamb Details - Centrally Hung Doors

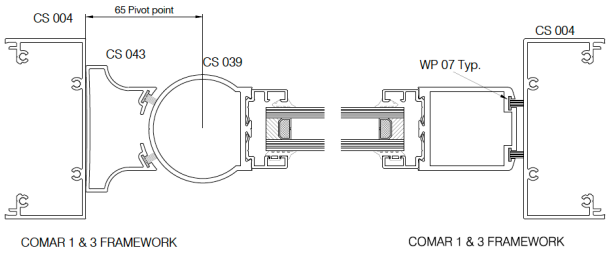

Copyright & ownership of the drawing is vested in Bailey CW Limited whose prior written consent is required for its use, reproduction or publication to any third party. All other rights reserved. Subject to modifications without prior notification.

Bailey CW Limited, The Willow Centre, 17 Willow Lane, Mitcham, Surrey, CR4 4NX

T: +44 (0) 1403 261 844 | **E:** info@builtwithbailey.com